# **Floyd County Annex Renovation**

for

## Floyd County, Indiana

# Addendum No. 02

#### **OWNER'S TECHNICAL REP**



#### Envoy, Inc.

8990 E 116th St Suite 250 Fishers, Indiana 46308 Phone: 317.594.4600 Fax: 317.594.4601 www.envoycompanies.com

#### ARCHITECT / ENGINEER

LMH Architecture + MAR Architects 319 Bank Street New Albany, Indiana 47150 Phone: 812-945-2324 www.lmharchitecture.com

Project:	Floyd County Annex Renovation
Date:	July 08, 2025
Ву:	Envoy, Inc.

#### **ADDENDUM**

Number: 01

This addendum is based in accordance with the provisions of "The General Conditions of the Contract for Construction," Article 1, "Contract Documents" and becomes a part of the Contract Documents as provided therein. Bids will be received at the Floyd County in the Commissioner's Office located at 2524 Corydon Pike, Suite 104, New Albany, IN 47150 until 6:00 p.m. (local time) on Tuesday July 15, 2025.

Included with this Addendum are the following Notes and Clarifications:

1. Updated drawings set with information on finishes, fire-rated doors, ceiling heights, bulkheads, and existing MEP fixtures. Please read all clouded notes and comments on the architectural and MEP drawings.



# FLOYD COUNTY ANNEX RENOVATION 2ND & 3RD FLOORS

120 W SPRING ST NEW ALBANY, INDIANA


BID SET

FLOYD COUNTY
ANNEX
RENOVATION 2ND
& 3RD FLOORS 120
W. SPRING

NEW ALBANY IND

COVER

REVISIONS

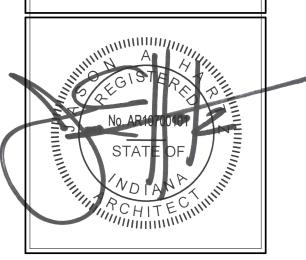





FCI2501
DATE


JUNE 12, 2025
SHEET NUMBER

COVER

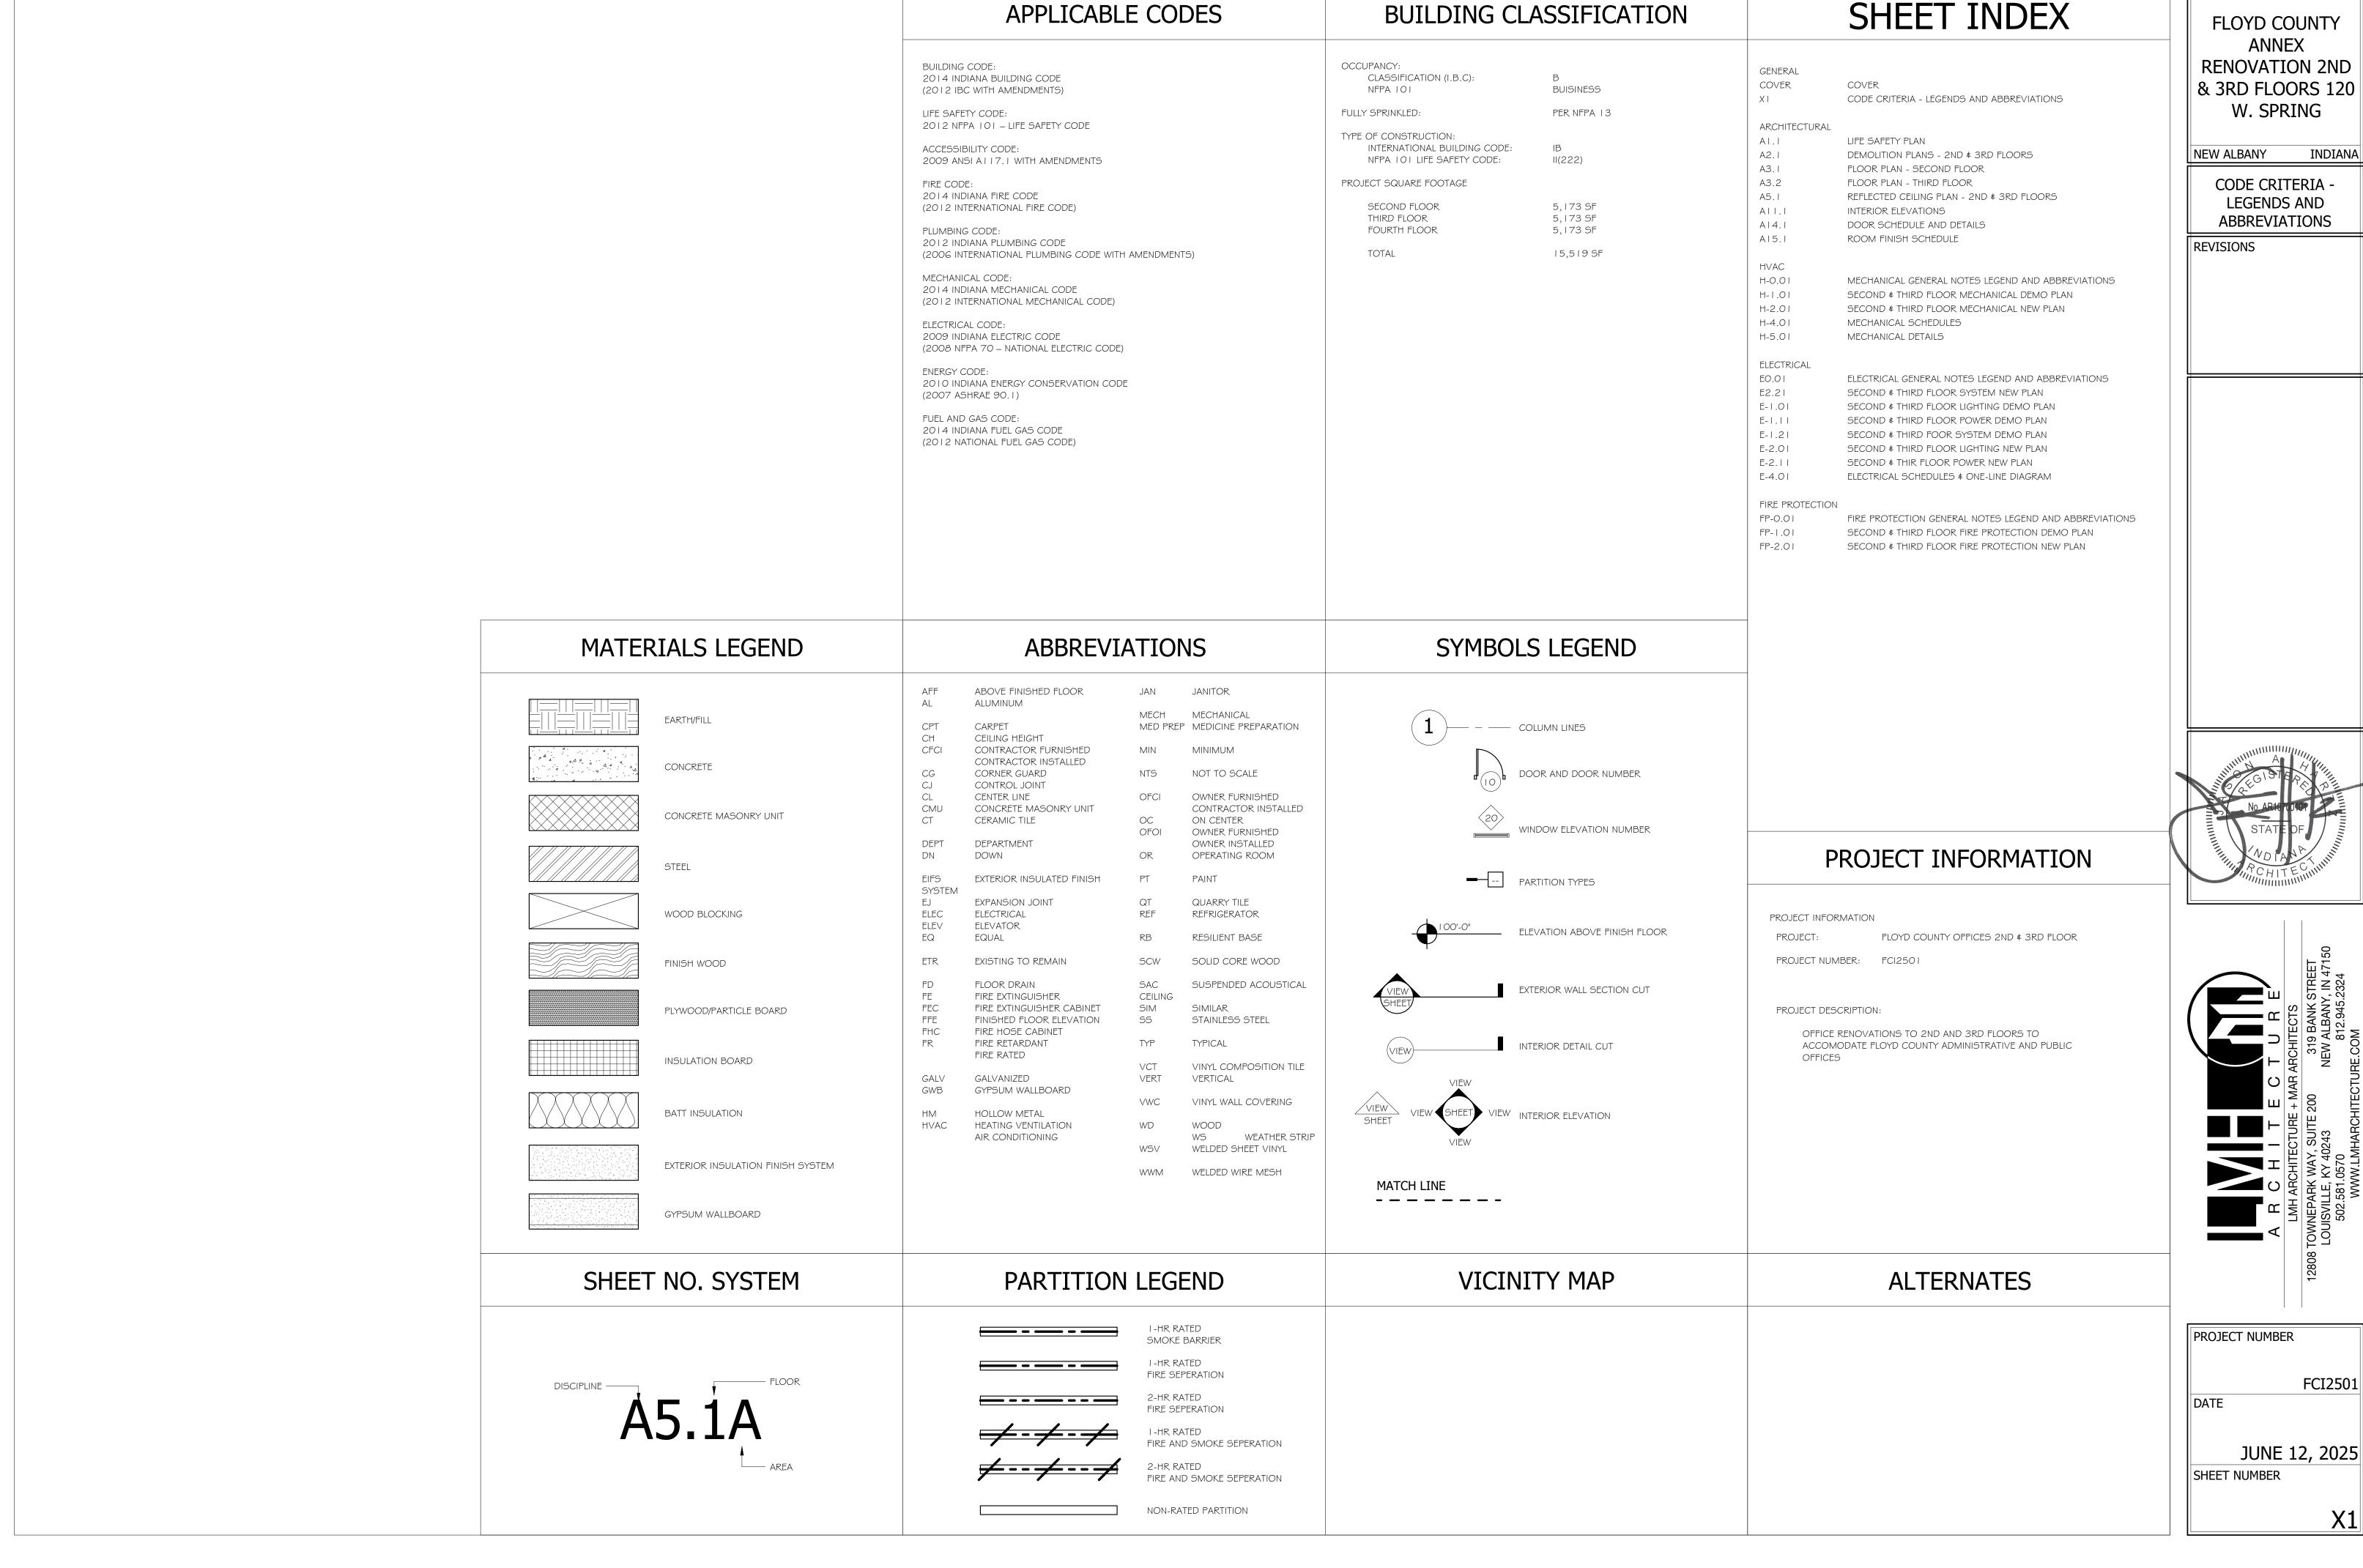


& 3RD FLOORS 120

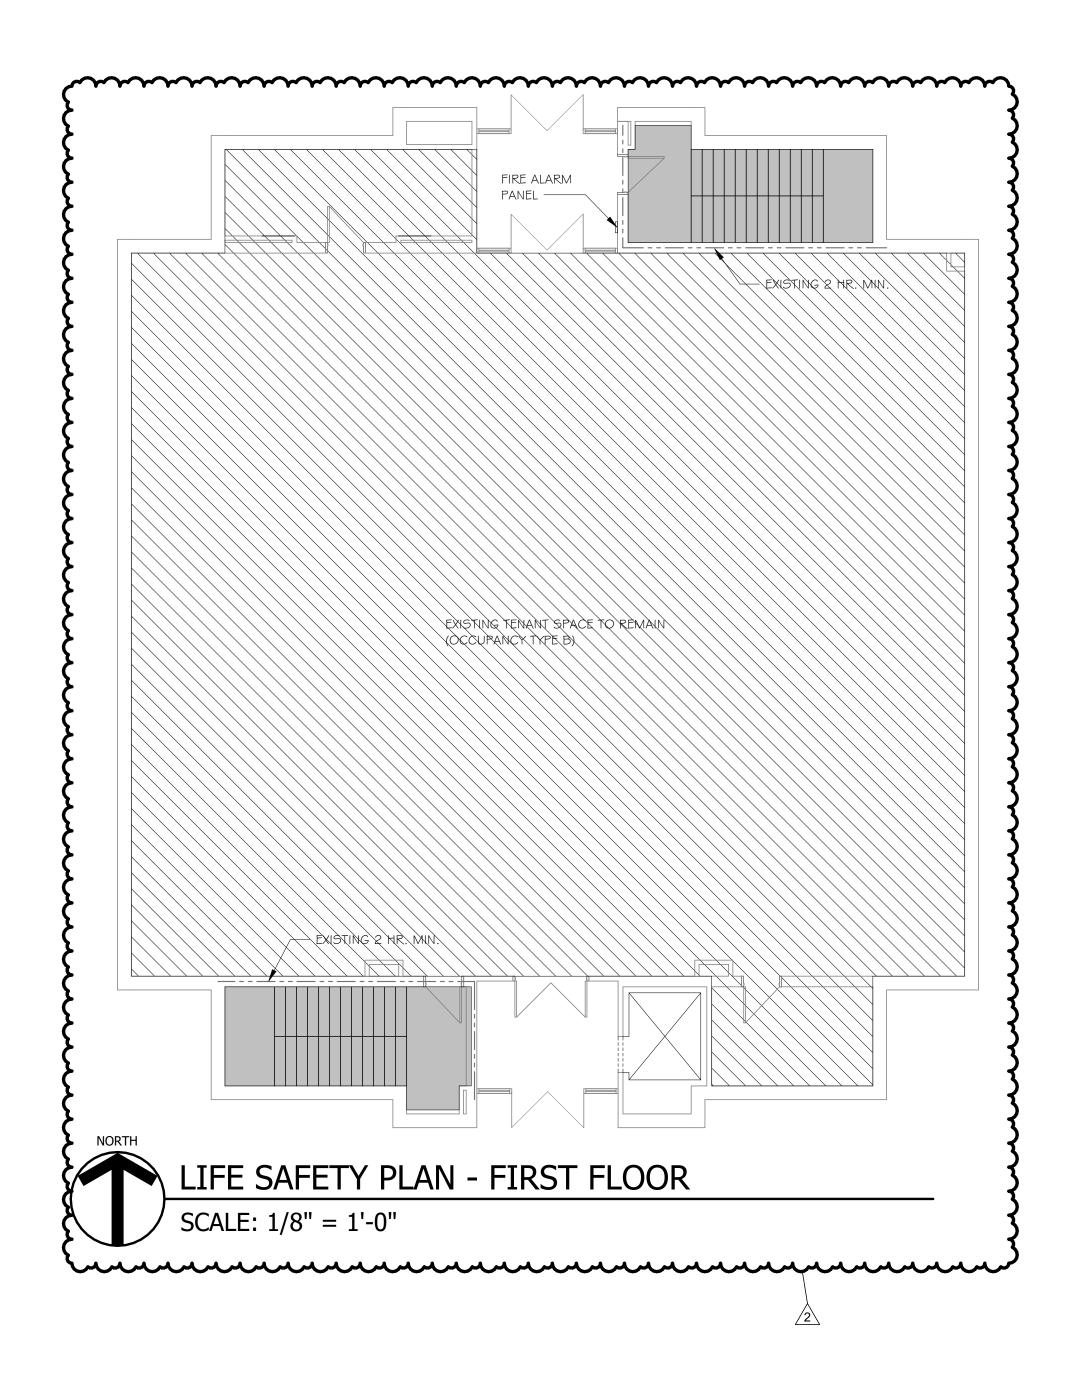

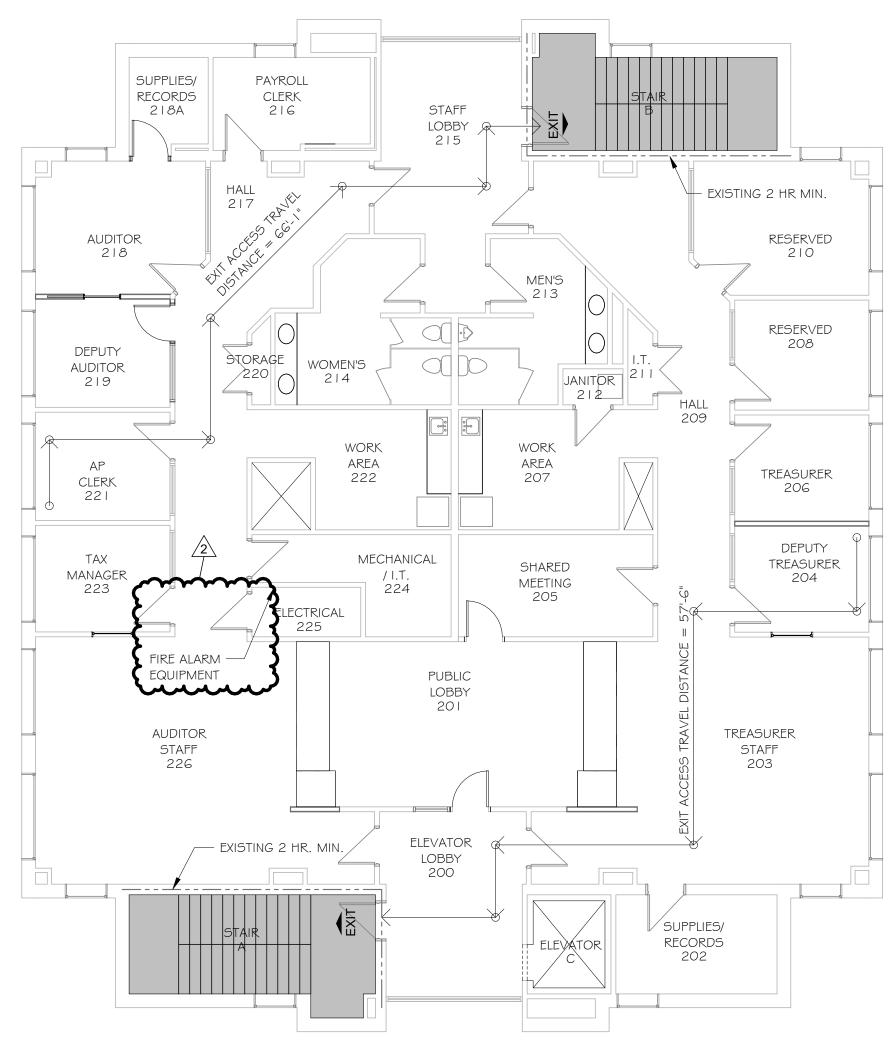

LIFE SAFETY PLAN - SECOND FLOOR

SCALE: 1/8" = 1'-0"

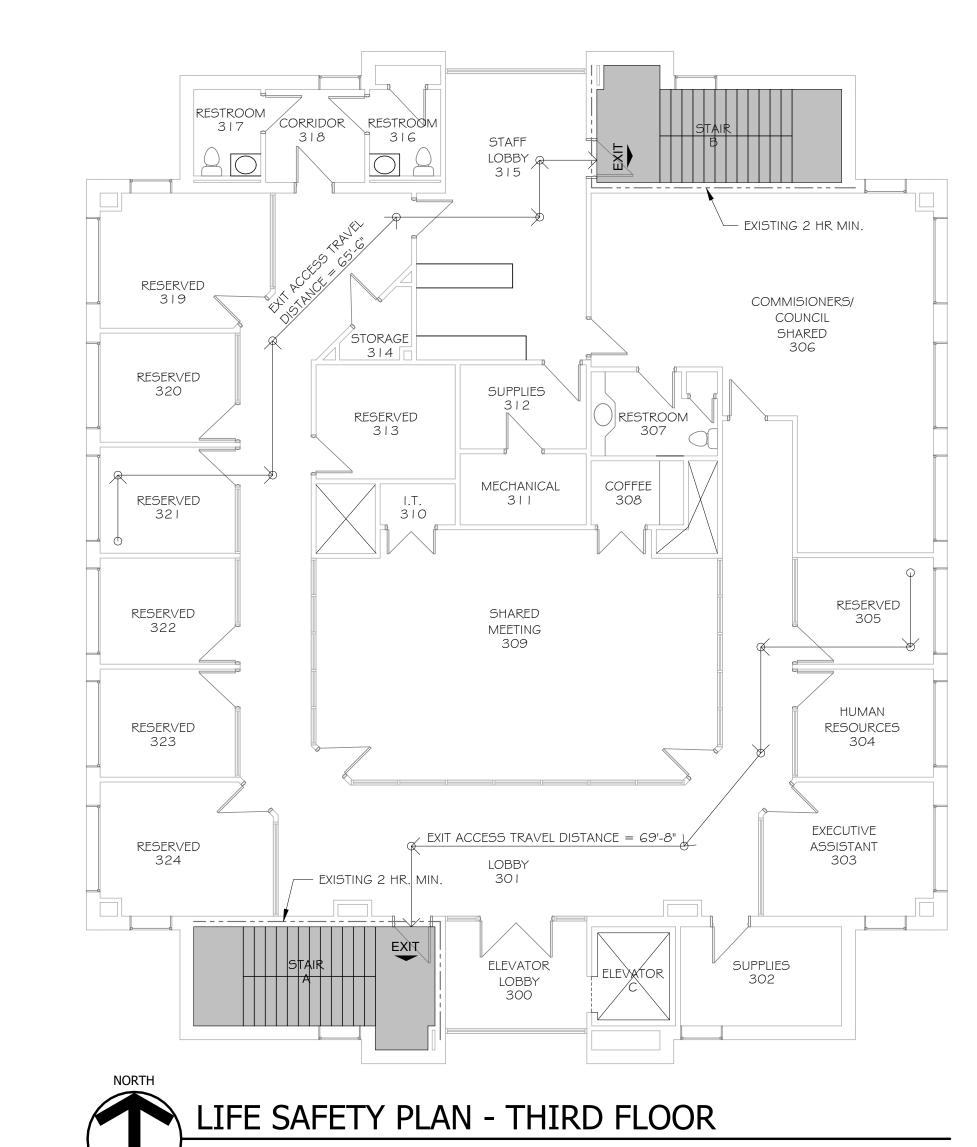



2 HOUR FIRE RATED BARRIER

NEW
EXISTING

EXIT ACCESS STAIR

NEW/EXISTING

RATED STAIR DOORS - CONSTRUCTED TO RESIST THE PASSAGE OF SMOKE. DOORS HARDWARE SHALL BE POSITIVE LATCHING WITH THE EXCEPTION OF TOILET ROOMS, BATHROOMS, SHOWER ROOMS, SINK CLOSETS, AND SIMILAR AUXILIARY SPACES THAT DO NOT CONTAIN

WALLS SHALL FORM A BARRIER TO LIMIT THE TRANSFER OF SMOKE

34 CLEAR EGRESS WIDTH

FLAMMABLE OR COMBUSTIBLE MATERIALS.

	TABLE OF EXIT CAPACITY													
COMPARTMENT	AREA	OCCUPANCY CLASSIFICATION	SQUARE FEET PER OCCUPANT	NUMBER OF OCCUPANTS	INCHES PER OCCUPANT	INCHES REQUIRED OTHER EGRESS	INCHES PROVIDED							
SECOND FLOOR	4,690 SF	GROUP B	100	47	0.2	I O"	72"							
THIRD FLOOR	4,690 SF	GROUP B	100	47	0.2	I O"	72"							
TOTAL	9,380 SF		100	94	0.2	20"	72"							

SCALE: 1/8" = 1'-0"

FLOYD COUNTY
ANNEX
RENOVATION 2ND
& 3RD FLOORS 120
W. SPRING

NEW ALBANY INDIANA

LIFE SAFETY PLAN

REVISIONS

2 ADDENDUM #2 07.07.25

No. AR4670167

STATE OF

NO. AR4670167

STATE OF


NO. AR4670167

STATE OF


NO. AR4670167



PROJECT NUMBER
FCI250
DATE
JUNE 12, 202
SHEET NUMBER
A1.1

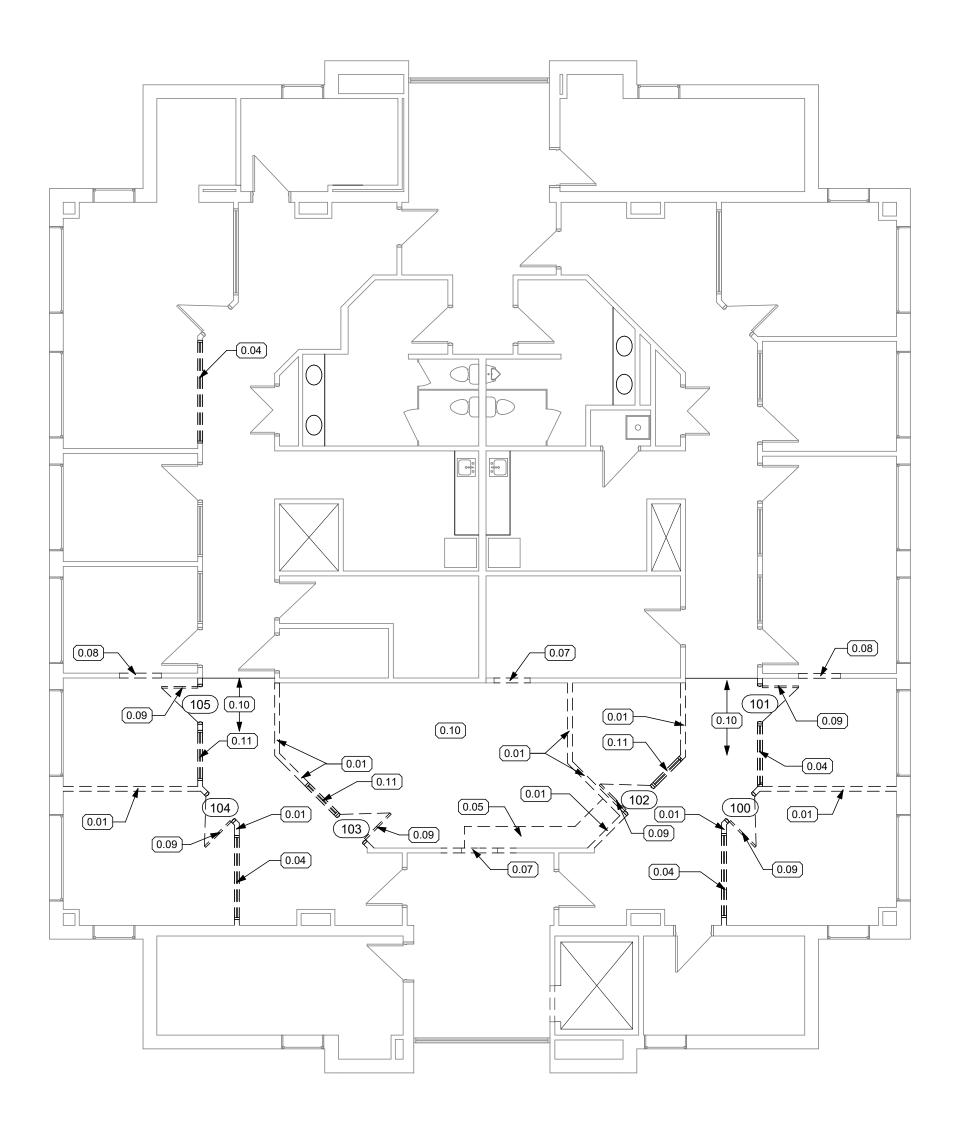



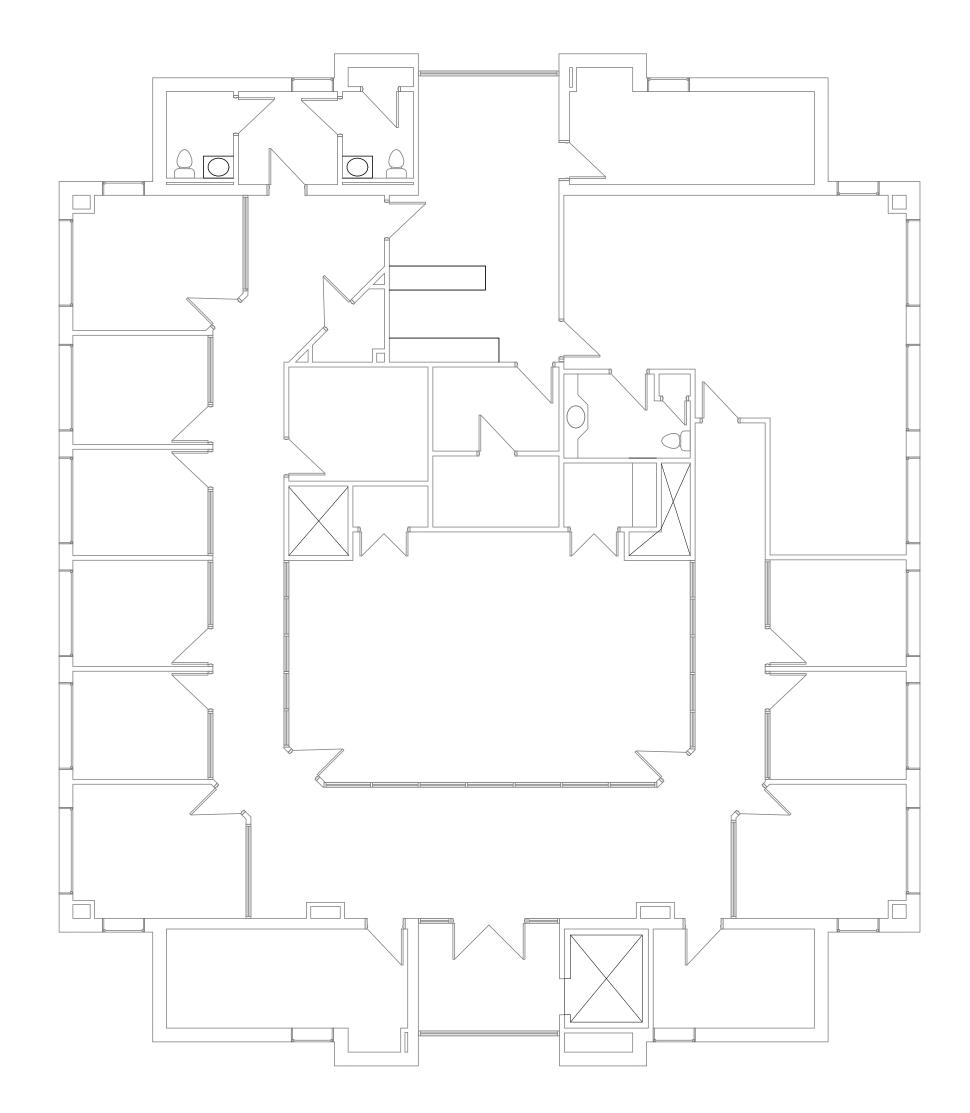



# DEMOLITION LEGEND

EXISTING WALL TO REMAIN

EXISTING WALL CONSTRUCTION TO REMAIN EXISTING DOOR AND FRAME TO REMAIN

EXISTING WALL CONSTRUCTION TO REMAIN EXISTING DOOR AND FRAME TO BE REMOVED

EXISTING WALL CONSTRUCTION TO BE DEMOLISHED EXISTING DOOR AND FRAME TO BE REMOVED

# GENERAL DEMOLITION NOTES

- A. SCHEDULE DEMOLITION WORK WITH THE OWNER OR OWNER'S REP TO MINIMIZE THE DISRUPTION OF SERVICES AND PROVIDE FOR THE UNINTERRUPTED FUNCTIONING OF THE FACILITY.
- B. CUT AND PATCH AS REQUIRED FOR INSTALLATION OF WORK ITEMS. REFER TO MECHANICAL, PLUMBING, FIRE PROTECTION, AND ELECTRICAL DOCUMENTS FOR ADDITIONAL CUTTING REQUIREMENTS.
- C. PROVIDE TEMPORARY SUPPORT WHERE DEMOLITION AFFECTS STRUCTURE.
  PRIOR TO COMMENCING DEMOLITION WORK, NOTIFY ARCHITECT OF FIELD
  CONDITIONS PRESENTING HAZARD CONDITION FOR BUILDING OR
- D. REMOVE EXISTING FINISHES AS NECESSARY IN AREAS RECEIVING NEW
- FINISHES. PROTECT SURROUNDING AREA FINISHES.

  E. LEGALLY DISPOSE ITEMS REJECTED BY THE OWNER.
- F. COORDINATE UTILITY SHUT DOWNS AND DISCONNECTS WITH OWNER.
- G. SALVAGE REQUIRED QUANTITY OF STAINED WOOD TRIM, FLOOR BASE, DOORS, BORROWED LIGHT GLASS AND FRAMES TO REUSE.

# DEMOLITION KEYNOTES

O.OI REMOVE EXISTING WALL

0.02 REMOVE EXISTING DOOR AND TRIM

0.03 REMOVE EXISTING DOOR AND TRANSOM

0.04 REMOVE EXISTING BORROWED LITE GLASS

0.05 REMOVE EXISTING CASEWORK

0.06 REMOVE EXISTING PLUMBING FIXTURES


- 0.07 CREATE OPENING IN EXISTING WALL FOR NEW DOOR INSTALLATION
  0.08 CREATE OPENING IN EXISTING WALL FOR NEW BORROWED LITE
- O.O8 CREATE OPENING IN EXISTING WALL FOR NEW BORROWED LITE INSTALLATION
- 0.09 SALVAGE EXISTING DOOR AND TRIM FOR REUSE
- O.10 SALVAGE EXISTING CARPET TILE FOR REUSE
- O. I I SALVAGE EXISTING BORROWED LITE GLASS AND TRIM FOR REUSE

FLOYD COUNTY
ANNEX
RENOVATION 2ND
& 3RD FLOORS 120
W. SPRING

NEW ALBANY INDIANA

DEMOLITION PLANS -2ND & 3RD FLOORS

REVISIONS

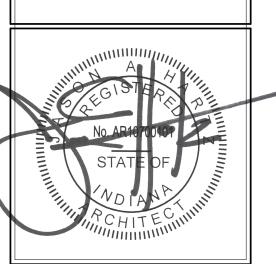




FCI2501
DATE

JUNE 12, 2025
SHEET NUMBER

A2.1

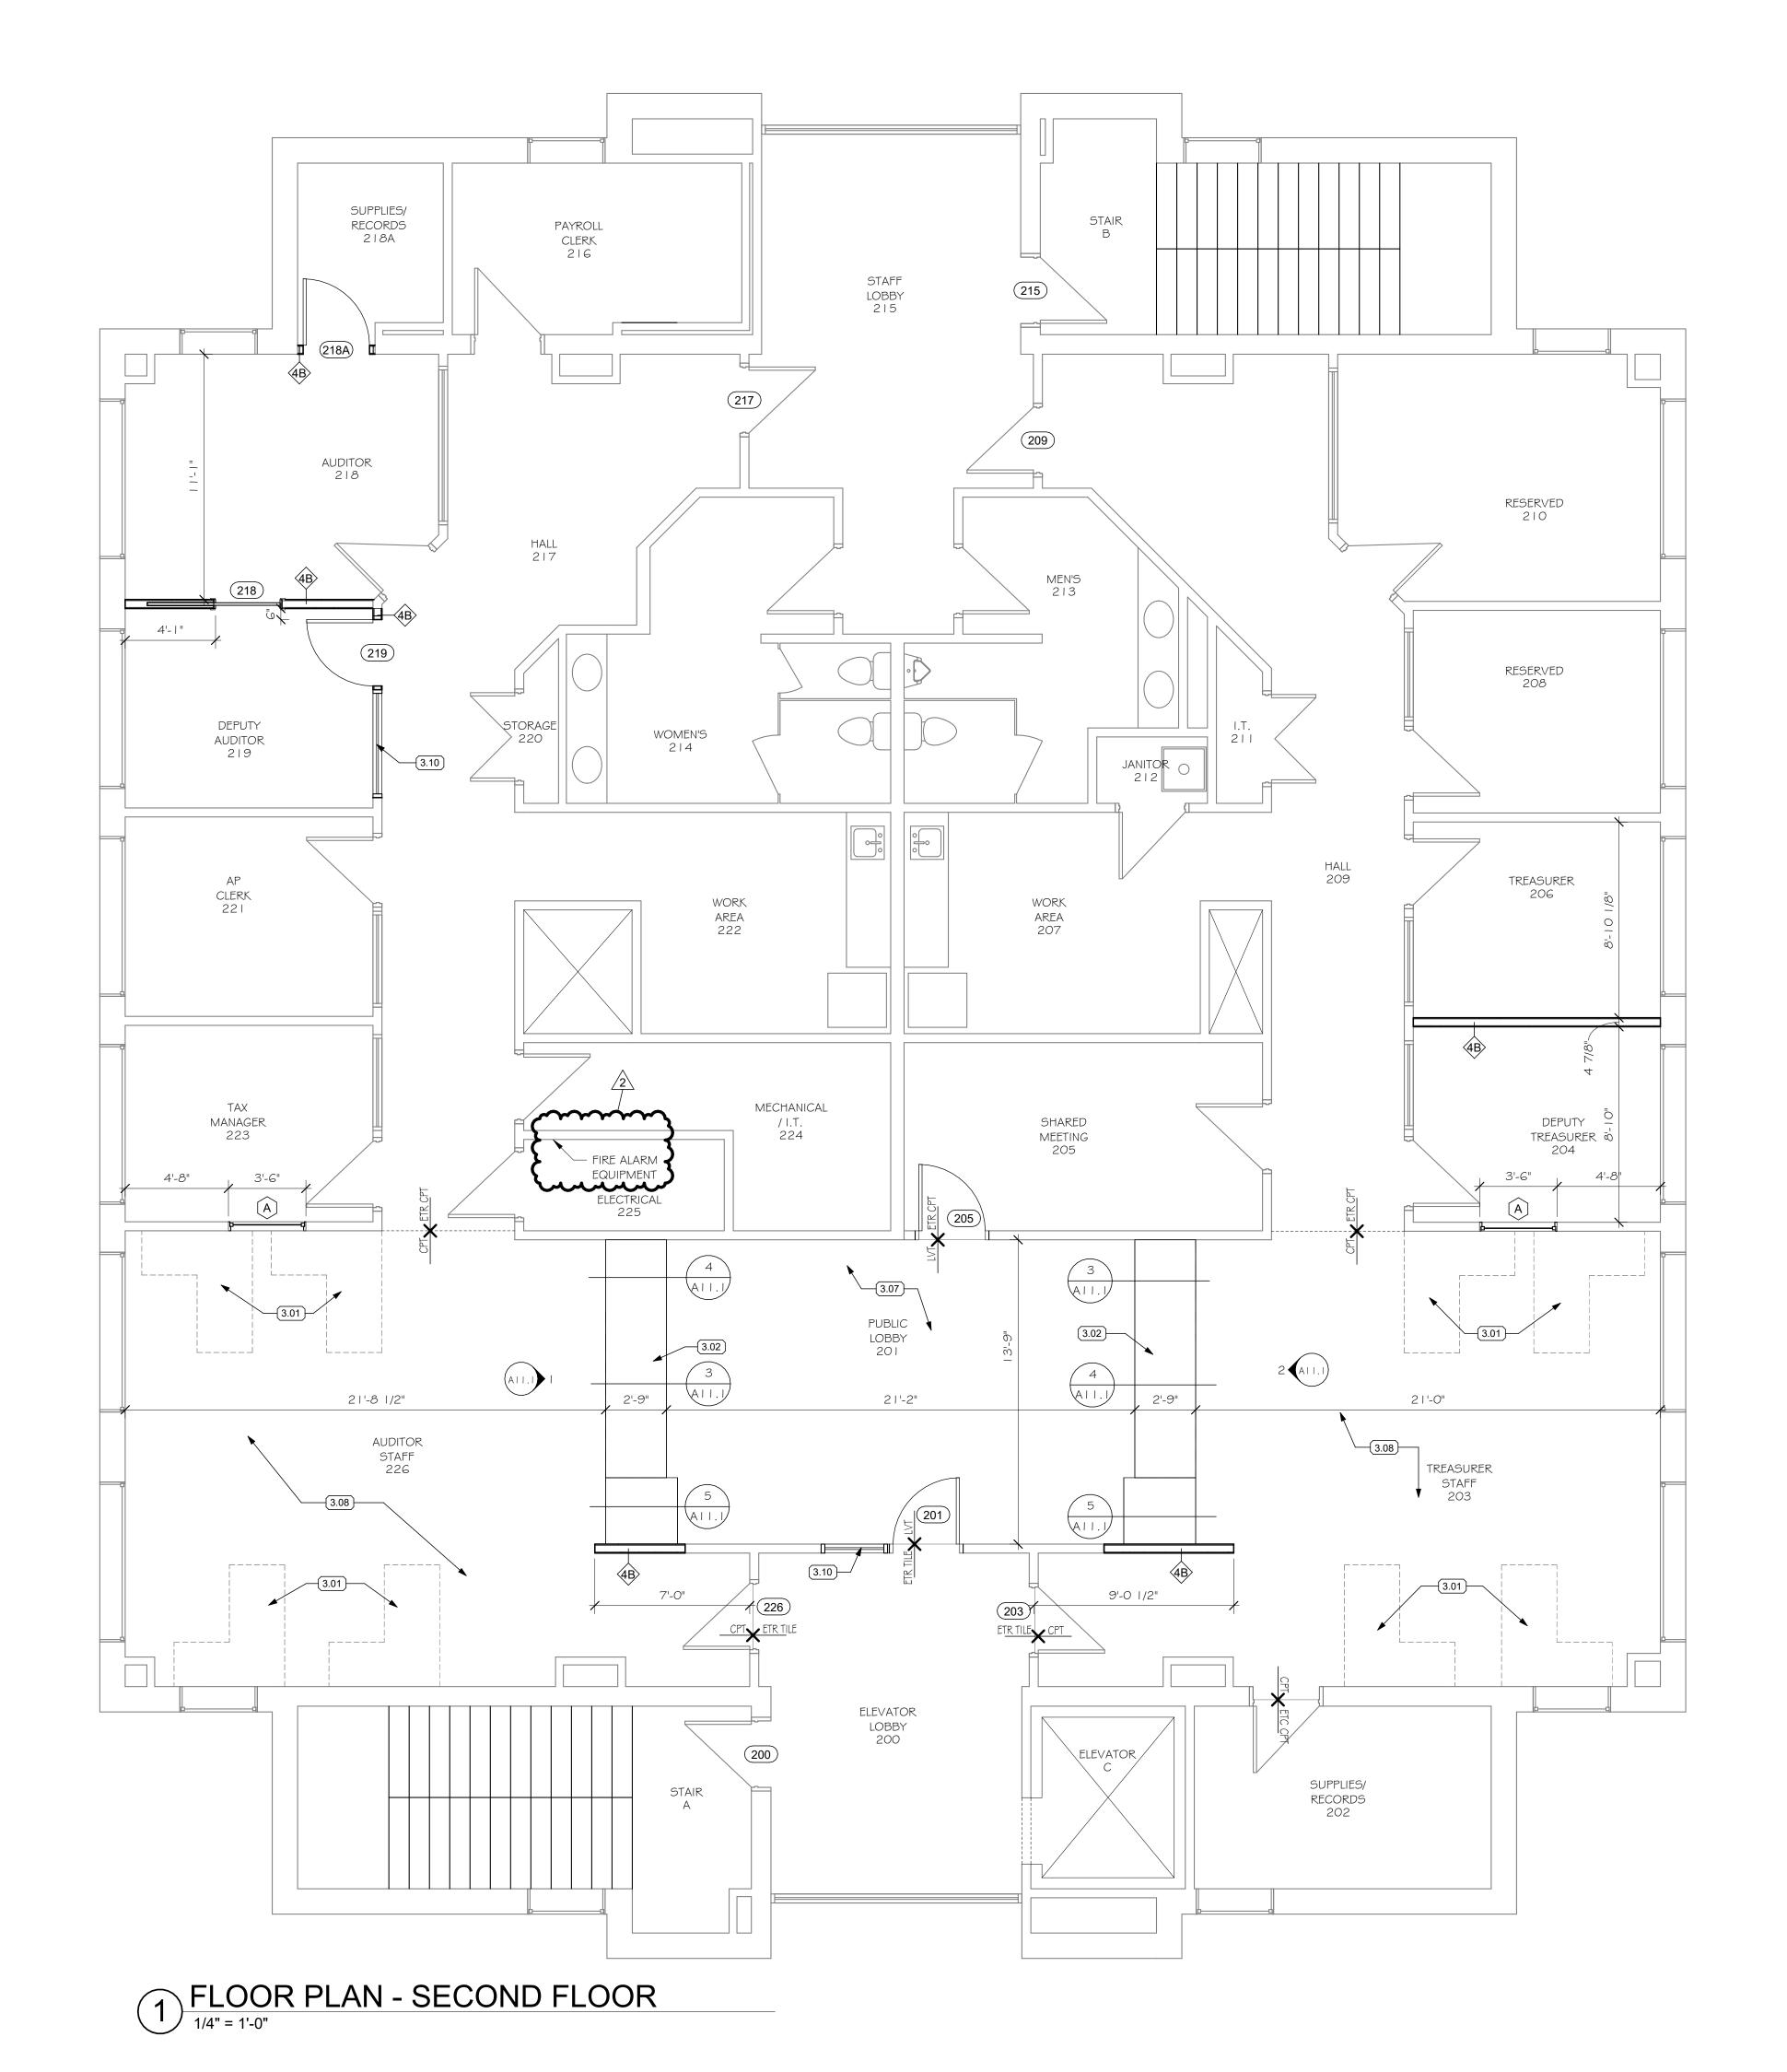

# **GENERAL PLAN NOTES**

- A. DIMENSIONS ARE FROM FACE OF FINISHED SURFACE TO FACE OF FINISHED SURFACE.
- B. DIMENSIONS NOTED AS "CLEAR" ARE FROM FINISHED FACE TO
- FINISHED FACE. C. INTERIOR PARTITIONS SHALL BE 3-5/8" 20 GAGE METAL STUDS @ 16"
- O.C. UNLESS NOTED OTHERWIE. D. INTERIOR PARTITIONS TYPES ARE INDICATED ON SHEET A3.1.
- E. PATCH AND REPAINT TO MATCH EXISTING WALL CORNER TO CORNER IN ROOMS WHERE WORK IS BEING COMPLETED.
- F. IN ROOMS WITH NO WORK BEING COMPLETED EXISTING FINISHES TO REMAIN. PROTECT DURING CONSTRUCTION TO ADJACENT AREAS..
- G. WHERE EXISTING WALL WAS REMOVED PATCH DRYWALL TO MATCH ADJACENT FINISH. PAINT ENTIRE WALL FROM INSIDE CORNER TO INSIDE CORNER.
- H. PATCH AS REQUIRED AND PAINT ALL WALLS ON SECOND FLOOR.

# FLOOR PLAN KEY NOTES

- 3.01 FURNITURE (NOT IN CONTRACT)
- 3.02 BUILT IN P-LAM CASEWORK
- 3.03 OFFICE EQUIPMENT (NOT IN CONTRACT)
- 3.04 NEW SINK
- 3.05 REFRIGERATOR (NOT IN CONTRACT)
- 3.06 KNAPE \$ VOST EXTRA HEAVY DUTY STANDARDS AND BRACKETS ADJUSTABLE SHELVING SYSTEM.
- 3.07 NEW LVT FLOORING AT ENTIRE EXTENT OF ROOM
- 3.08 NEW CARPET TILE FLOORING AT ENTIRE EXTENT OF ROOM
- 3.10 REINSTALL SALVAGED BORROWED LITE WINDOW, FIELD VERIFY SIZE 3.11 RELOCATED OFFICE FILE AND STORAGE CABINET (NOT IN CONTRACT)
- 3.12 PUBLIC COMPUTER STATION WORK COUNTER
- 3.14 ALIGN FACE OF COUNTER WITH INDICATED ADJACENT ARCHITECTURAL

FLOYD COUNTY **ANNEX RENOVATION 2ND** & 3RD FLOORS 120


NEW ALBANY INDIANA

W. SPRING

FLOOR PLAN - SECOND **FLOOR** 

REVISIONS

2 ADDENDUM #2 07.07.25

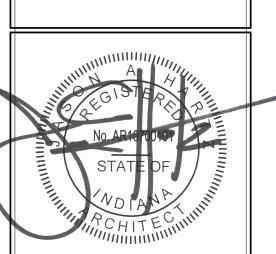




PROJECT NUMBER FCI2501 DATE JUNE 12, 2025 SHEET NUMBER A3.1

- 3 5/8" X 2 1/2" DEEP SLIP TRACK SLOTTED RUNNER W/ FLAT STRAPS OR 'Z' BARS SECURED TO UNDERSIDE OF STRUCTURE - WAFFLE HEAD SHEET METAL SCREW SECURED THRU RUNNER SLOT TO METAL STUD BOTH SIDES OF STUD. SCREWS REQUIRED ON ALL STUDS TOP FASTENER OF GYPSUM WALLBOARD LOCATED | 1/4" BELOW BOTTOM OF RUNNER - 3 5/8" 20 GAGE METAL STUDS @ 16" O.C. - SOUND ATTENUATION BLANKET — LINE OF CEILING

- EXISTING STRUCTURAL DECK

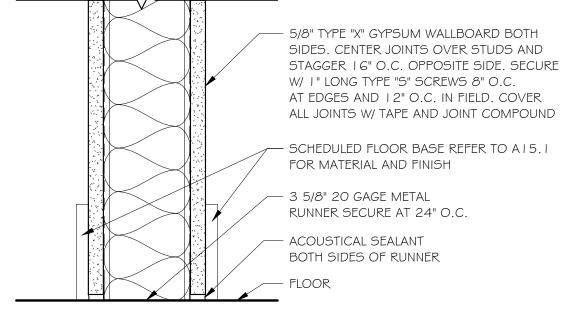


- SCHEDULED FLOOR BASE REFER TO A I 5. I FOR MATERIAL AND FINISH — 3 5/8" 20 GAGE METAL RUNNER SECURE AT 24" O.C.

— ACOUSTICAL SEALANT BOTH SIDES OF RUNNER

4B - WALL TYPE

SCALE: 3" = 1'-0"

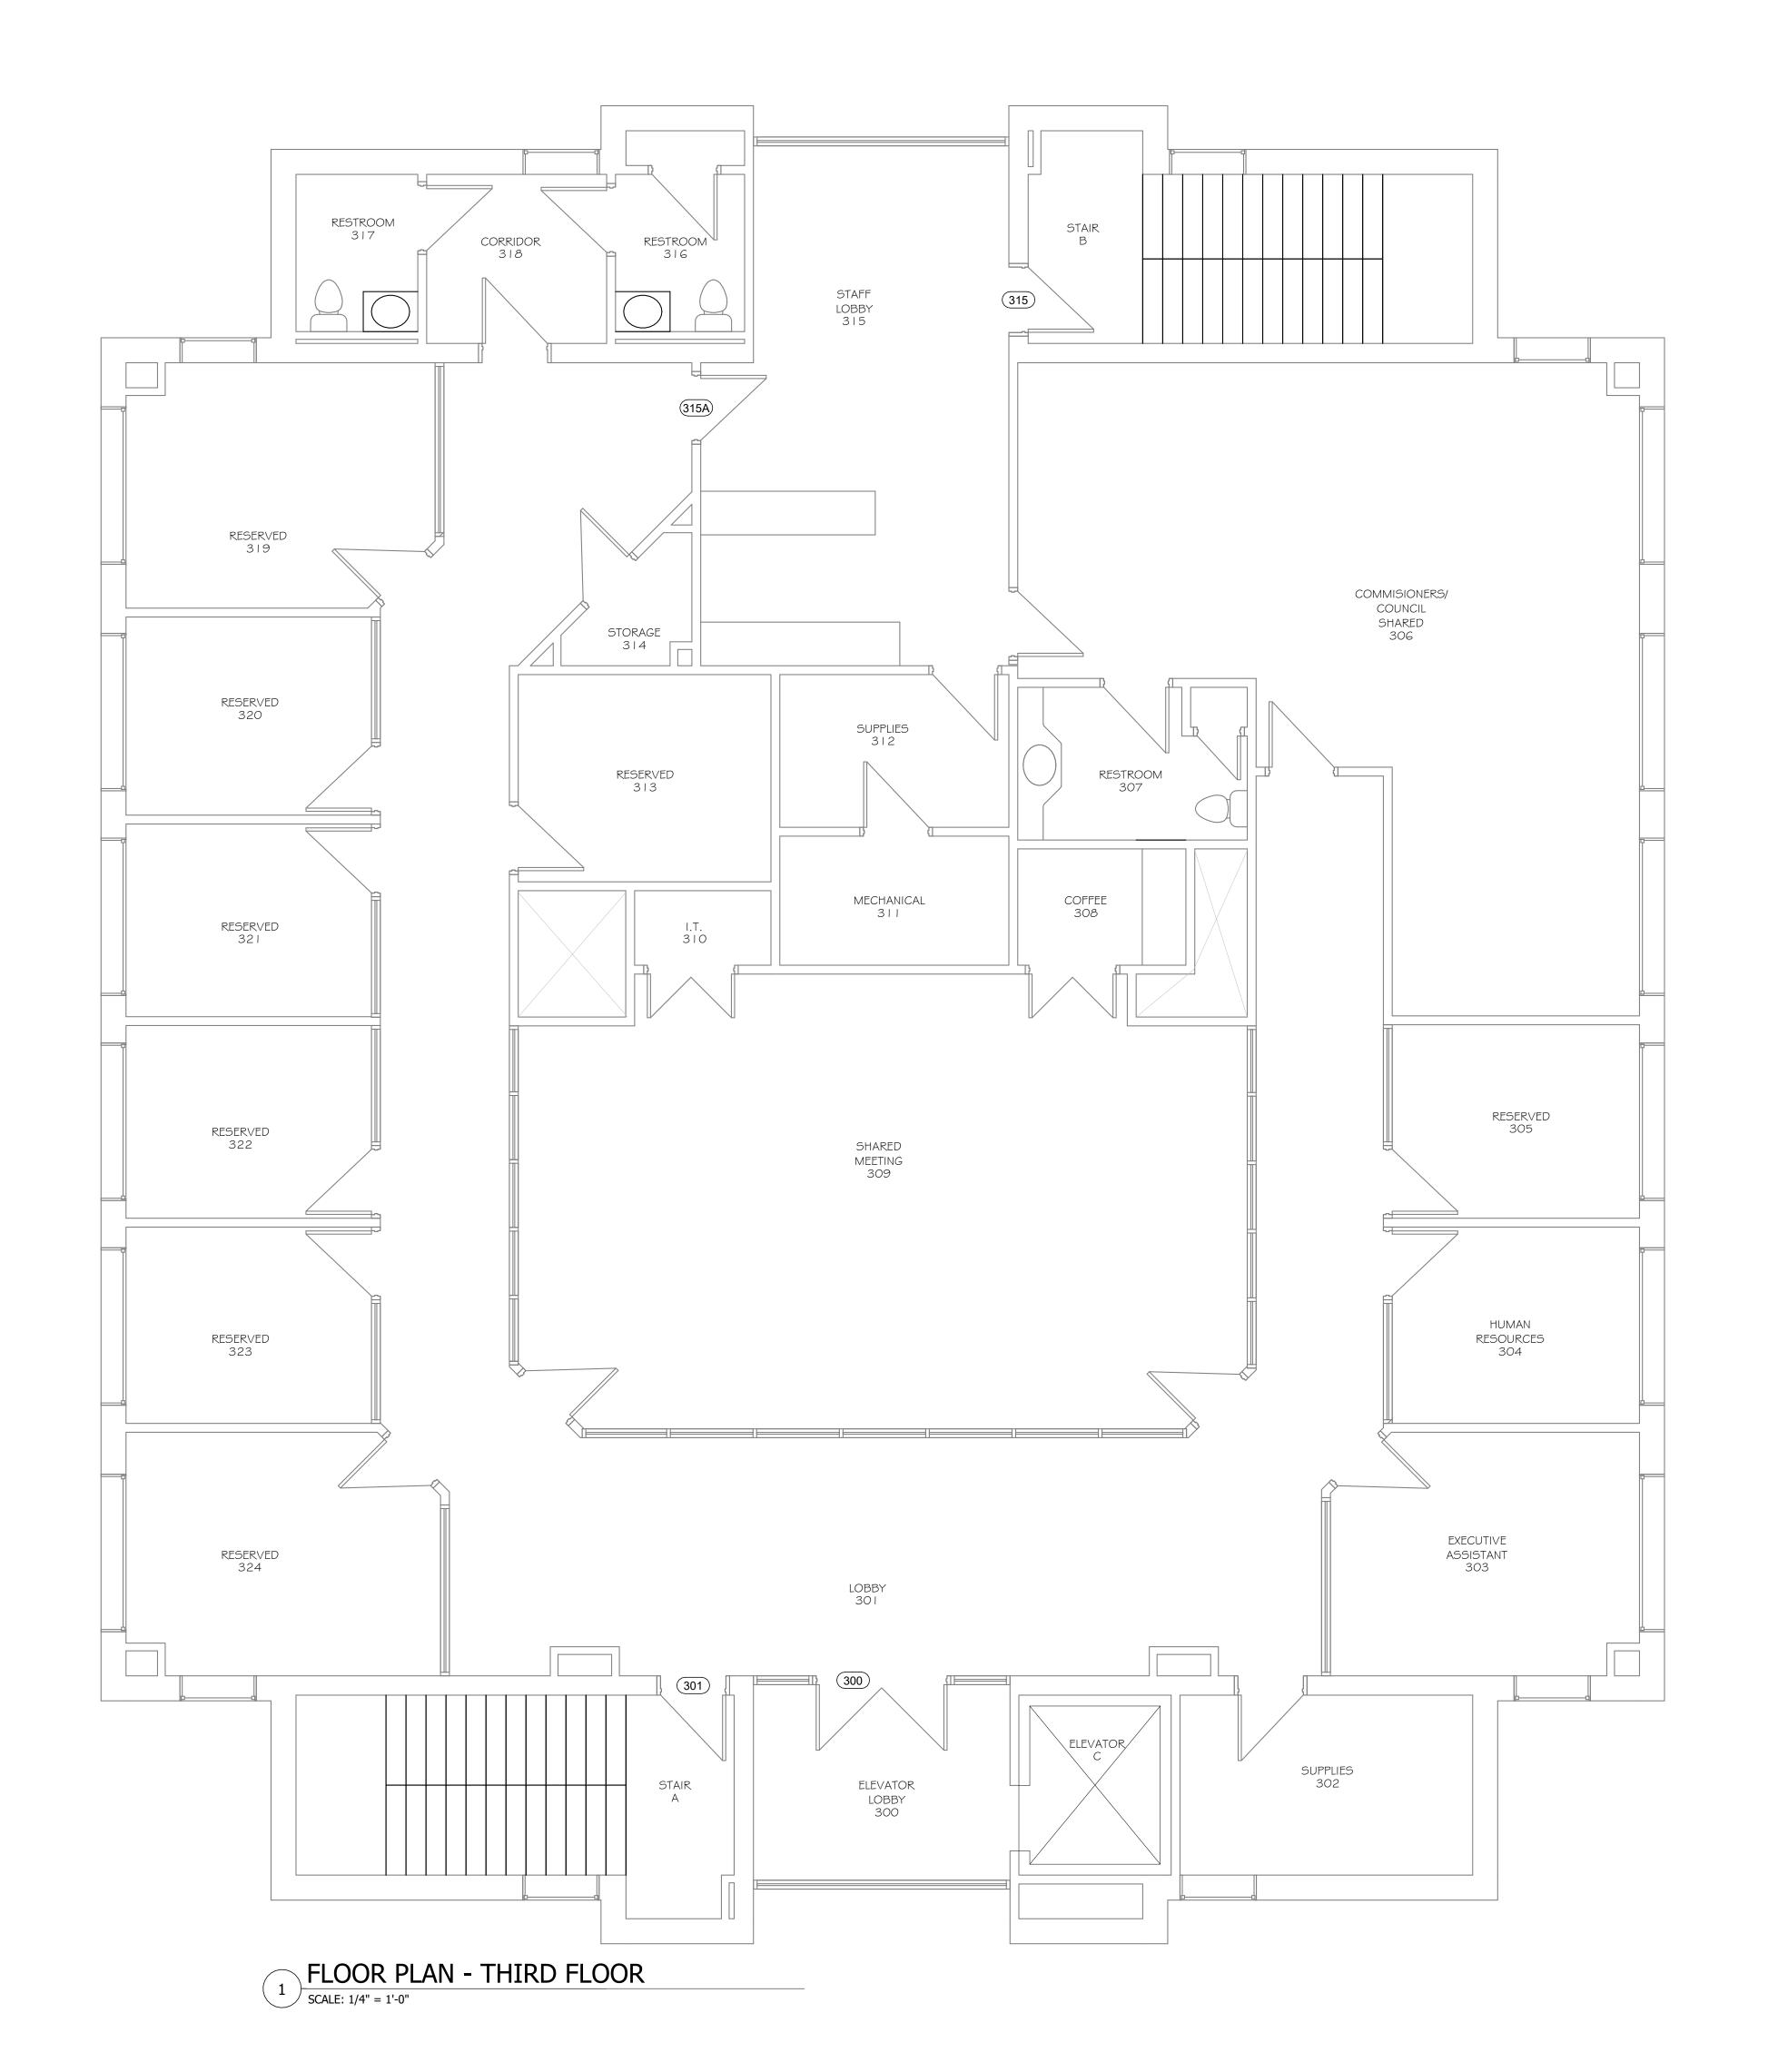

# **GENERAL PLAN NOTES**

- A. DIMENSIONS ARE FROM FACE OF FINISHED SURFACE TO FACE OF FINISHED SURFACE.
- B. DIMENSIONS NOTED AS "CLEAR" ARE FROM FINISHED FACE TO
- FINISHED FACE.

  C. INTERIOR PARTITIONS SHALL BE 3-5/8" 20 GAGE METAL STUDS @ 16"
- O.C. UNLESS NOTED OTHERWIE.

  D. INTERIOR PARTITIONS TYPES ARE INDICATED ON SHEET A3.1.

  E. PATCH AND REPAINT TO MATCH EXISTING WALL CORNER TO CORNER
- PATCH AND REPAINT TO MATCH EXISTING WALL CORNER TO CORNERIN ROOMS WHERE WORK IS BEING COMPLETED.IN ROOMS WITH NO WORK BEING COMPLETED EXISTING FINISHES TO
- REMAIN. PROTECT DURING CONSTRUCTION TO ADJACENT AREAS..


  G. WHERE EXISTING WALL WAS REMOVED PATCH DRYWALL TO MATCH ADJACENT FINISH. PAINT ENTIRE WALL FROM INSIDE CORNER TO
- INSIDE CORNER. H. PATCH AS REQUIRED AND PAINT ALL WALLS ON SECOND FLOOR.

FLOYD COUNTY
ANNEX
RENOVATION 2ND
& 3RD FLOORS 120
W. SPRING

NEW ALBANY INDIANA

FLOOR PLAN - THIRD FLOOR

REVISIONS

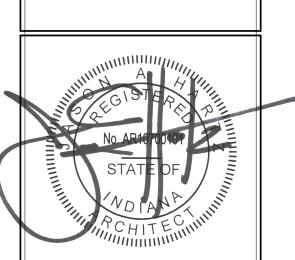


PROJECT NUMBER

FCI2501
DATE

JUNE 12, 2025
SHEET NUMBER

A3.2

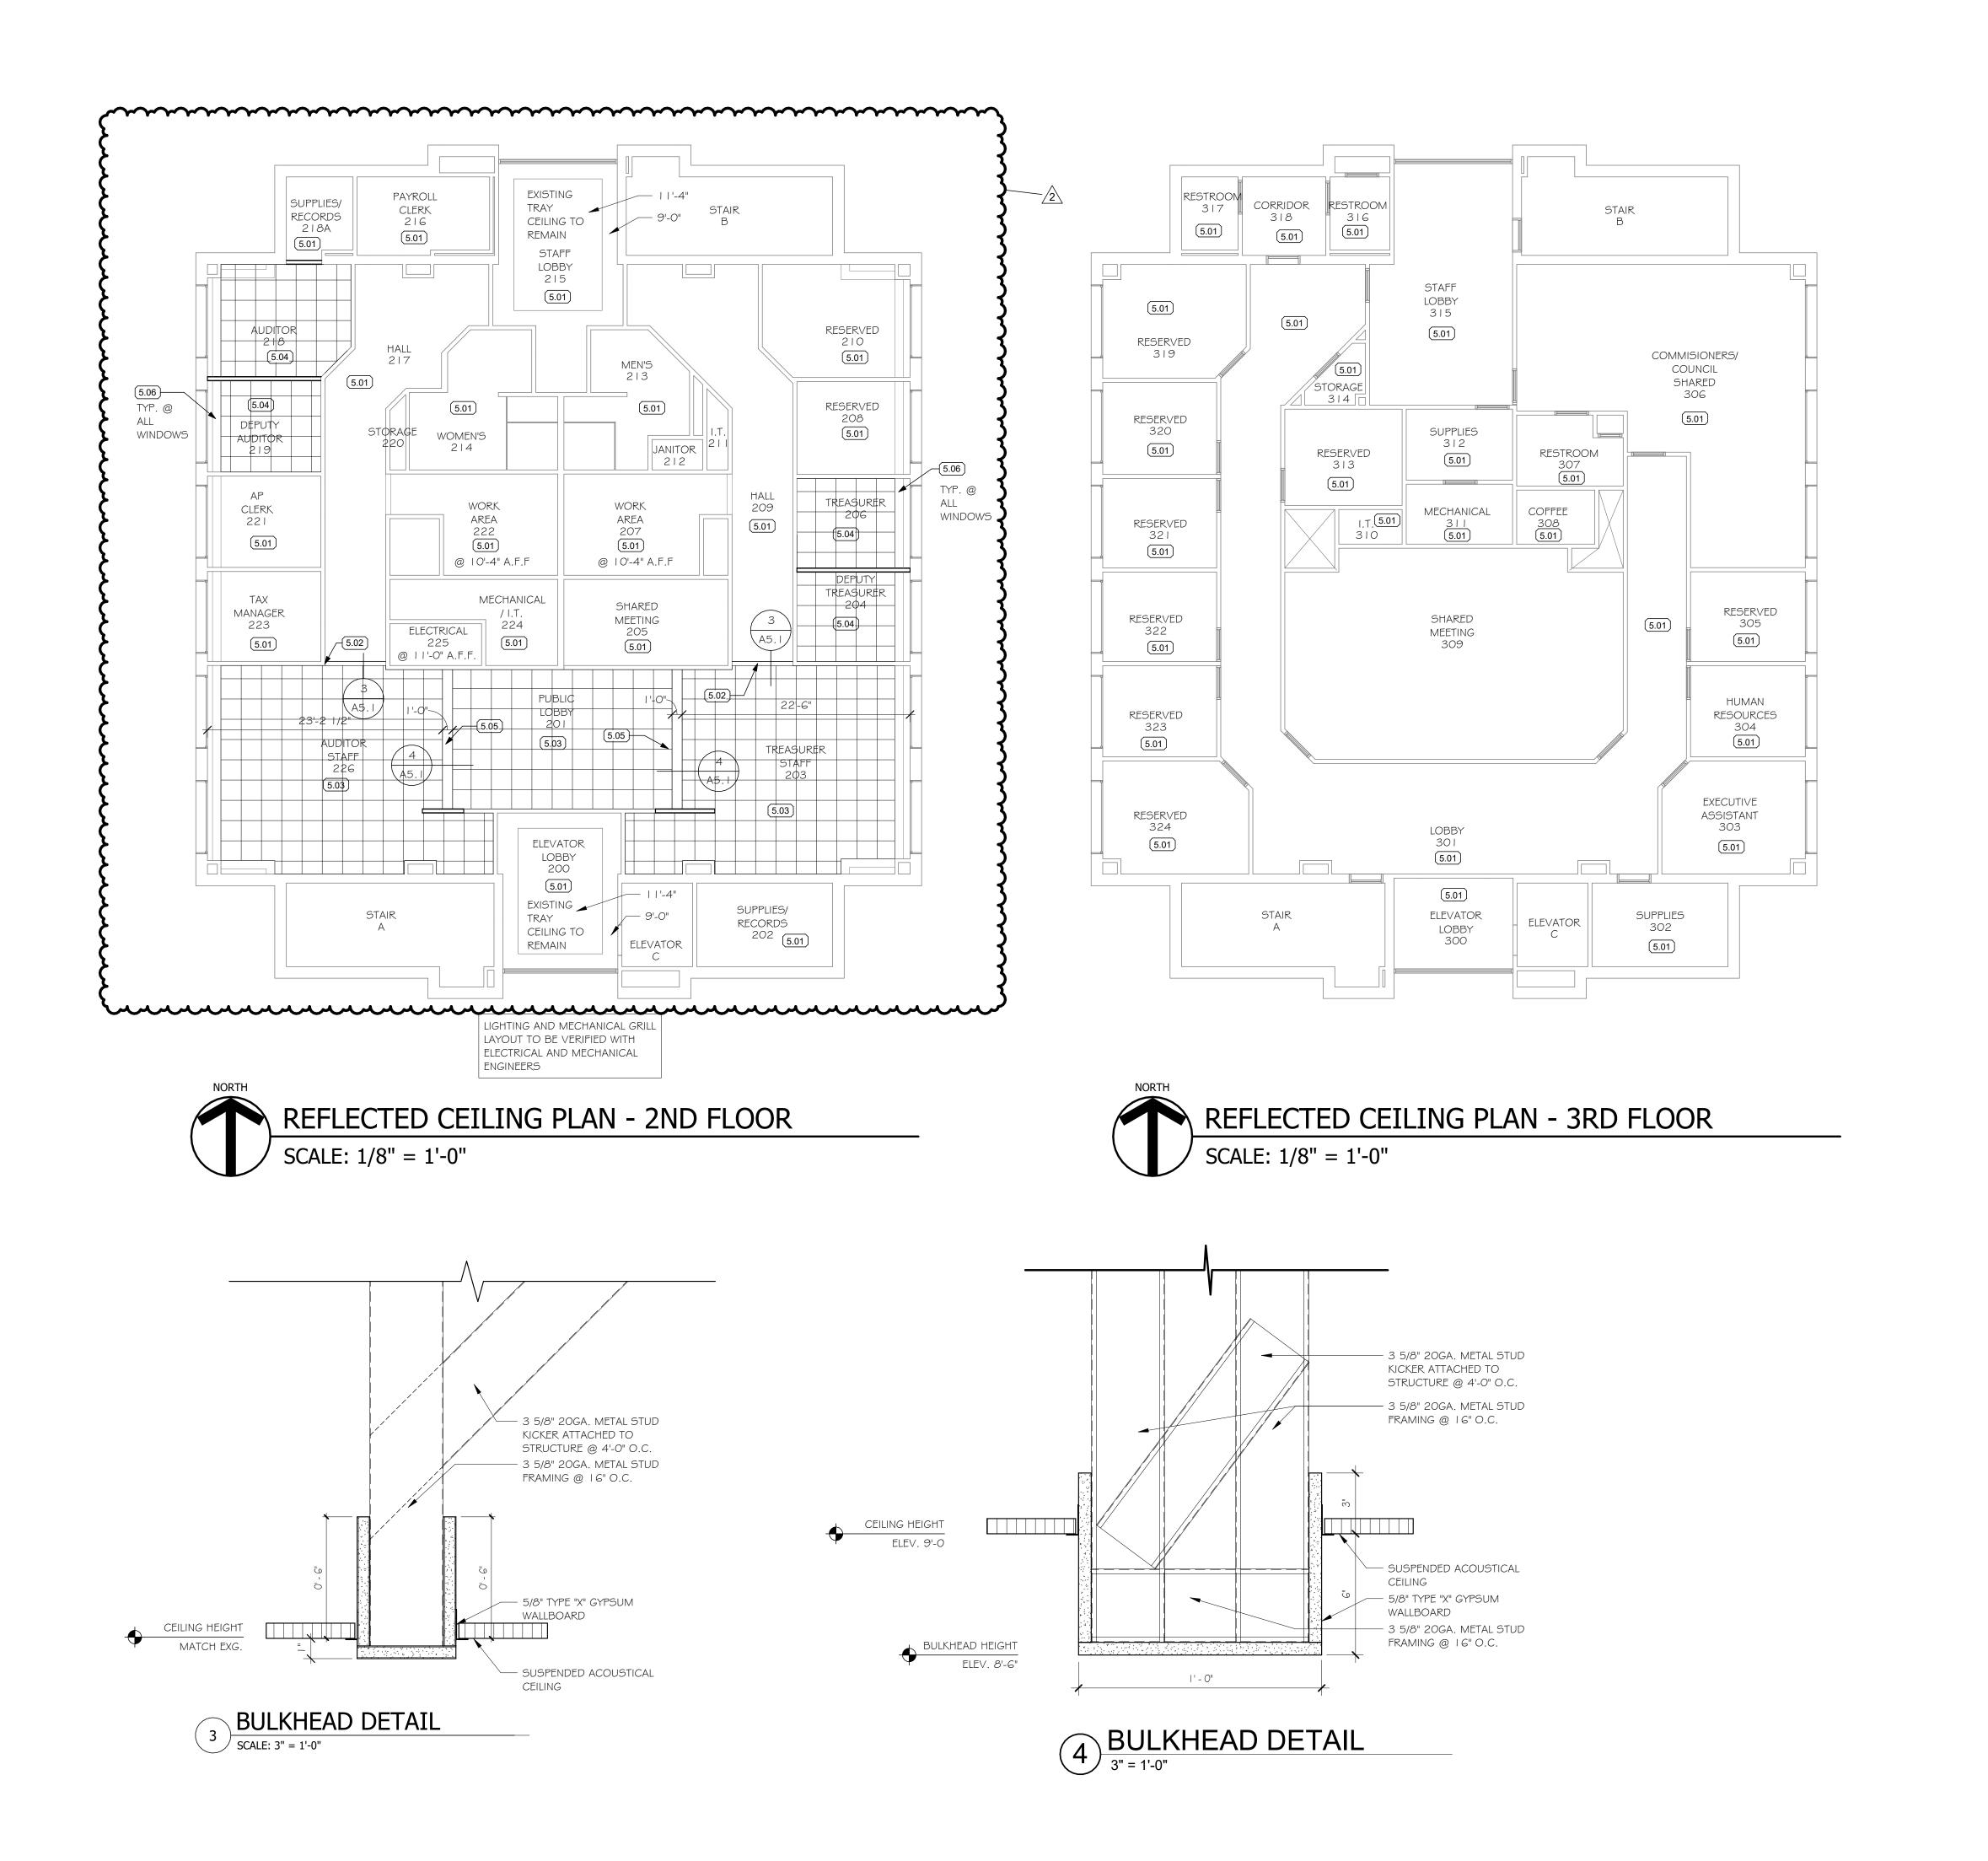

# WALL RATING LEGEND

SMOKE COMPARTMENT BARRIER WALL (I HOUR RATED CONSTRUCTION WITH

20 MINUTE OPENING PROTECTION) I HOUR FIRE RATED PARTITION

2 HOUR FIRE RATED PARTITION

I HOUR FIRE RATED SMOKE COMPARTMENT BARRIER WALL

FLOYD COUNTY

**ANNEX** 

**RENOVATION 2ND** 

& 3RD FLOORS 120

W. SPRING

REFLECTED CEILING

PLAN - 2ND & 3RD

**FLOORS** 

2 ADDENDUM #2 07.07.25

INDIANA

NEW ALBANY

REVISIONS

# GENERAL REFLECTED CEILING NOTES


A. MATCH NEW CEILING GRID AND TILE TO THE EXISTING STYLE AND COLOR OF ADJACENT CEILING

P NEW CEILING TO BE SAME AS EVISTING CHILING HEIGHT AS ADJACENT CEILING. CEILING HEIGHT IS 9'-0" UNLESS OTHERWISE NOTED

C. WHERE POSSIBLE MODIFY EXISTING GRID LAYOUT TO ACCOMIDATE NEW

PLAN LAYOUT. REUSE EXISTING TILES IN GOOD CONDITION.

# REFLECTED CEILING PLAN LEGEND



2X2 ACOUSTICAL CEILING GRID AND PANELS

2X4 ACOUSTICAL CEILING GRID AND PANELS

GYPSUM WALLBOARD CEILING

2'X4' RECESSED FLUORESCENT FIXTURE-COORDINATE WITH ELECTRICAL DRAWINGS

2'X2' RECESSED FLUORESCENT FIXTURE-COORDINATE WITH ELECTRICAL DRAWINGS

RECESSED DOWNLIGHT FIXTURE-COORDINATE WITH ELECTRICAL DRAWINGS

5

SMOKE DETECTOR COORDINATE WITH ELECTRICAL DRAWINGS

 $\langle H \rangle$ 

HEAT DETECTOR COORDINATE WITH ELECTRICAL DRAWINGS

 $\otimes$ 

CEILING MOUNTED EXIT SIGN COORDINATE WITH ELECTRICAL DRAWINGS

RETURN AIR DIFFUSER OR REGISTER

COORDINATE WITH MECHANICAL DRAWINGS

SUPPLY AIR DIFFUSER OR REGISTER

COORDINATE WITH MECHANICAL DRAWINGS

EXHAUST FAN

PENDANT LIGHT FIXTURE

COORDINATE WITH MECHANICAL DRAWINGS

COORDINATE WITH ELECTRICAL DRAWINGS LOCKABLE ACCESS PANEL

# REFLECTED CEILING KEYNOTES

5.01 EXISTING CEILING TO REMAIN.

5.02 NEW GYPSUM BOARD BULKHEAD @ 8'-11" A.F.F., FACES OF BULKHEAD TO MATCH ADJACENT WALL FINISH. BOTTOM OF BULKHEAD TO BE CEILING WHITE PAINT. SEE DETAIL 3/A5. I

5.03 NEW LAY IN ACOUSTICAL 2X2 CEILING. MATCH HEIGHT OF ADJACENT EXISTING ACOUSTICAL LAY-IN CEILING (9'-O" UNLESS OTHERWISE NOTED)

 $\cdots$ 

5.04 MODIFY EXISTING ACOUSTICAL CEILING AS REQUIRED. 5.05 NEW GYPSUM BOARD BULKHEAD @ 8'-6" A.F.F., FACES OF BULKHEAD TO


MATCH ADJACENT WALL FINISH. BOTTOM OF BULKHEAD TO BE CEILING WHITE PAINT. SEE DETAIL 4/A5. I

5.06 EXISTING GYPSUM BOARD BULKHEAD AND CURTAIN POCKET TO REMAIN.


PROJECT NUMBER FCI2501 DATE

> JUNE 12, 2025 SHEET NUMBER


> > A5.1

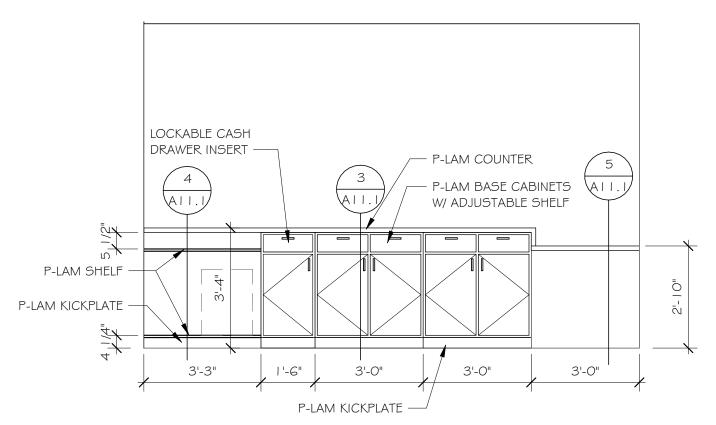


# AUDITOR TRANSACTION COUNTER 3/8" = 1'-0"

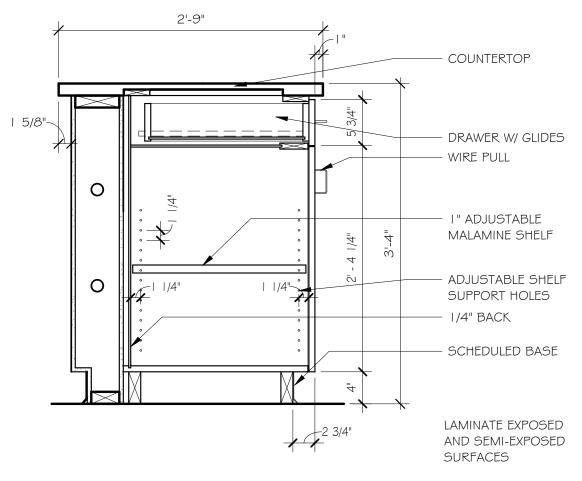


3 BASE SECTION
1" = 1'-0"

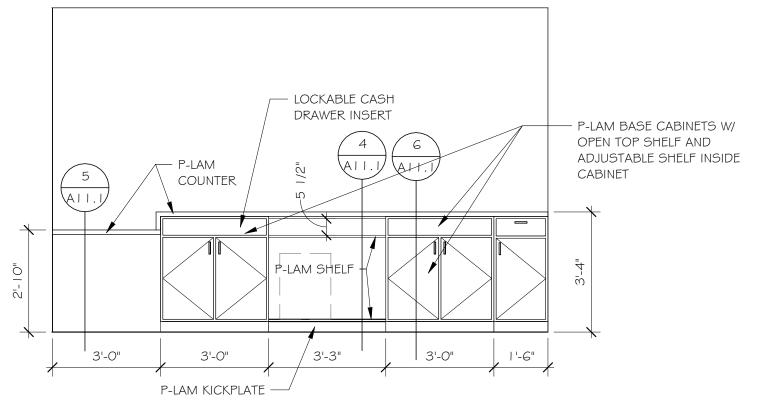


# TREASURER TRANSACTION COUNTER 3/8" = 1'-0"

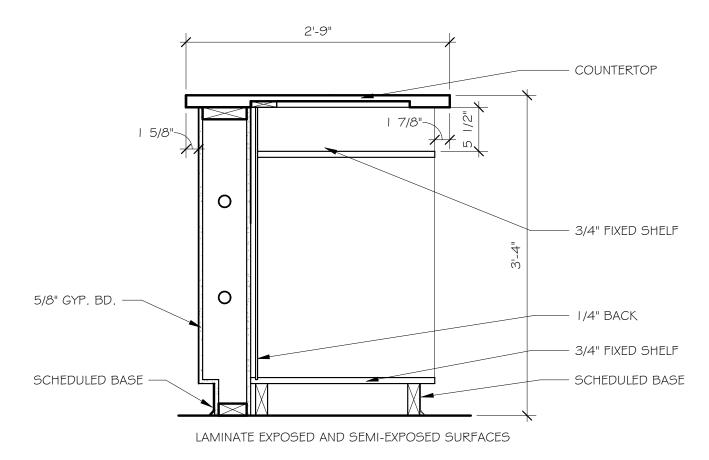

4 BASE SECTION OPEN SHELVES

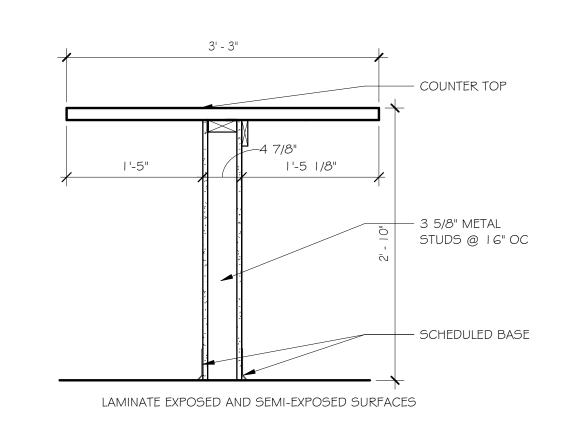

5 KNEE SPACE BOTH SIDES

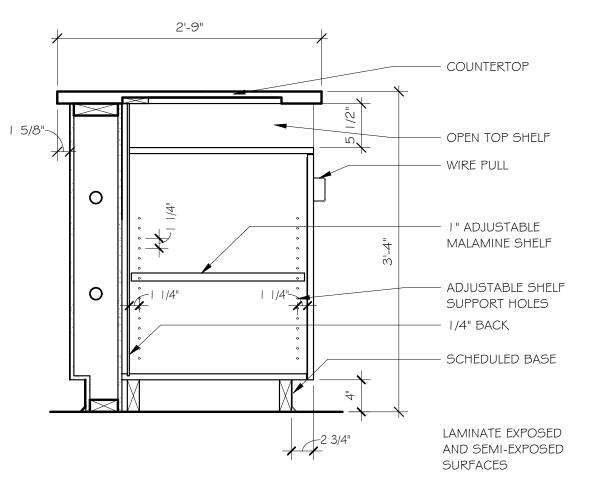

6 BASE SECTION WITH OPEN TOP SHELF

# GENERAL INTERIOR ELEVATION NOTES

- A. PROVIDE FINISHED END PANELS ON EXPOSED ENDS OF CABINETS AND ON SUPPORT LEGS.
- B. PROVIDE FILLER PANELS FOR PROPER DOOR OPERATION AND DRAWER
- OPERATION AND AS REQUIRED FOR FINISHED CASEWORK.

  C. PROVIDE SEALANT AT COUNTERTOP AND WALL INTERSECTIONS, AT
- BACKSPLASH AND WALL INTERSECTIONS, AND AT PLUMBING FIXTURES.

  D. PROVIDE I 1/2" RADIUS ON EXPOSED COUNTERTOP CORNERS.
- CASEWORK SECTIONS ARE INDICATED ON SHEET A | 2.1.
- F. MOUNT OUTLETS 10" ABOVE COUNTER TO TOP OF BOX UNLESS NOTED OTHERWISE.
- G. LAMINATE ALL EXPOSED AND SEMI-EXPOSED SURFACES OF CASEWORK AND
- COUNTERTOPS.


  H. SEE FINISH SCHEDULE ON A I 5. I FOR SPECIFIC FINISHES.
- I. ALL CASEWORK TO FOLLOW AWI STANDARDS.


FLOYD COUNTY
ANNEX
RENOVATION 2ND
& 3RD FLOORS 120
W. SPRING


NEW ALBANY INDIANA


INTERIOR ELEVATIONS


REVISIONS

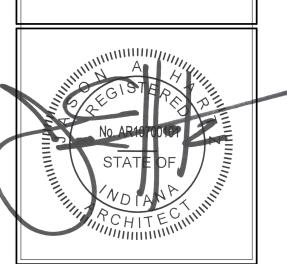

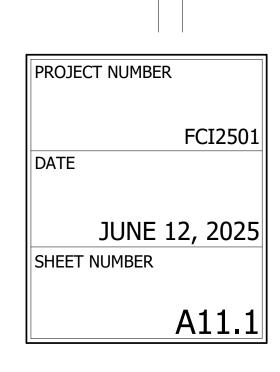

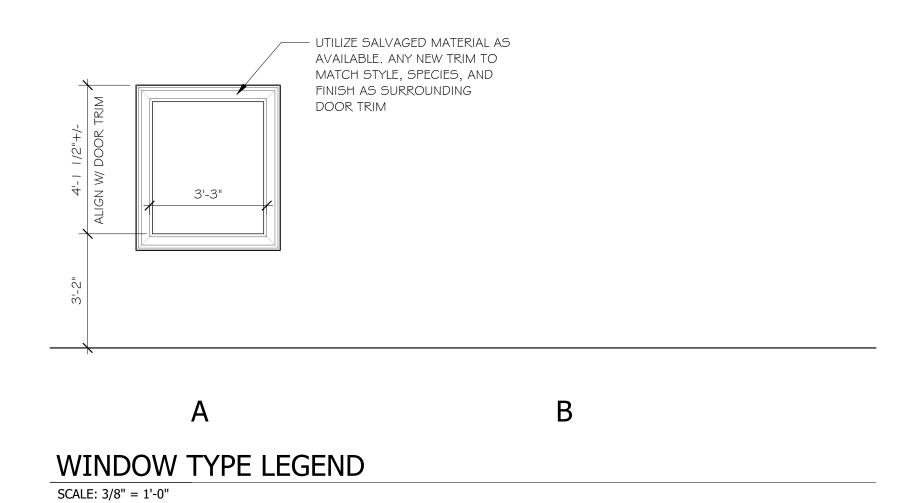

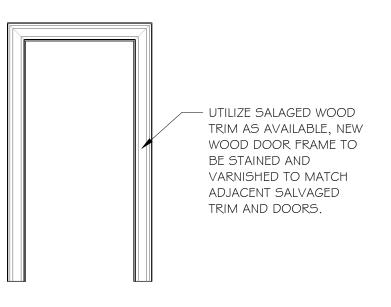

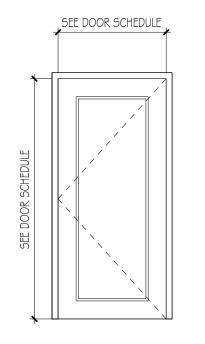

1

DOOR FRAME ELEVATIONS

SCALE: 3/8" = 1'-0"

DOOR TYPES

SCALE: 3/8" = 1'-0"

	DOOR SCHEDULE														
DOOR		ROOM					D	OOR			FRAME			SALVAGED	
NUMBER	ROOM NAME	NUMBER	PAIR	Width	Height	MATERIAL	FINISH	THICKNESS	TYPE	MATERIAL	FINISH	ELEVATION	HARDWARE	DOOR #	REMARKS
				6' - 0"	7' - 11"										
200	STAIR	А		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	-	-	-	-	1		EXISTING TO REMAIN WITH NEW HARDWARE
201	ELEVATOR LOBBY	200		3' - 0"	7' - 0"	SCW	S#V	0' - 1 3/4"	А	WOOD	SŧV	1	2	103	REUSE SALVAGED DOOR INCLUDING SALVAGED BORROWED LITE
203	ELEVATOR LOBBY	200		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	-	-	-	-	2		EXISTING TO REMAIN WITH NEW HARDWARE
205	SHARED MEETING	205		3' - 0"	7' - 0"	SCW	S#V	0' - 1 3/4"	А	WOOD	SŧV	1	2	104	REUSE SALVAGED DOOR
209	STAFF LOBBY	215		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	-	-	-	-	2		EXISTING TO REMAIN WITH NEW HARDWARE
215	STAIR	В		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	-	-	-	-	1		EXISTING TO REMAIN WITH NEW HARDWARE
217	HALL	217		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	-	-	-	-	2		EXISTING TO REMAIN WITH NEW HARDWARE
218	AUDITOR	218		3' - 0"	7' - 0"	HCW	PAINT	0' - 1 3/8"	А	WOOD	SŧV	1	6	101	POCKET DOOR REUSE SALVAGED DOOR
218A	SUPPLIES/ RECORDS	218A		3' - 0"	7' - 0"	SCW		0' - 1 3/4"	А	WOOD	SŧV	1	3	102	REUSE SALVAGED DOOR
219	DEPUTY AUDITOR	219		3' - 0"	7' - 0"	SCW		0' - 1 3/4"	А	WOOD	SŧV	1	4	105	REUSE SALVAGED DOOR INCLUDING SALVAGED BORROWED LITE
226	ELEVATOR LOBBY	200		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	-	-	-	-	2		EXISTING TO REMAIN WITH NEW HARDWARE
300	ELEVATOR LOBBY	300	YES	6' - 0"	7' - 0"	-		0' - 1 3/4"	-	-	-		5		EXISTING TO REMAIN WITH NEW HARDWARE
301	STAIR	А		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	-	-	-	-	1		EXISTING TO REMAIN WITH NEW HARDWARE
315	STAIR	В		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	-	-	-	-	1		EXISTING TO REMAIN WITH NEW HARDWARE
315A	STAFF LOBBY	315		3' - 0"	7' - 0"	-	-	0' - 1 3/4"	_	-	-	-	2		EXISTING TO REMAIN WITH NEW HARDWARE

SEE DEMOLITION PLANS FOR SALVAGED DOOR NUMBER REFERENCE

CONTRACTOR TO HAVE ALL EXISTING UNLABELED DOORS AND FRAMES IN 2-HOUR MINIMUM RATED STAIR WALL VERIFIED AND PROVIDE NEW 90 MINUTE LABELS ON ALL THAT DO NOT HAVE TAG / LABEL VISIBLE.

#### DOOR HARDWARE

- 1. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING HARDWARE PREPS AND MATCH EXISTING PRIOR TO ORDERING.
- 2. ALL HARDWARE SHALL BE SUPPLIED TO CONFORM TO APPLICABLE STATE, LOCAL AND NATIONAL CODES IN ACCORDANCE WITH THE AHJ.
- 3. FURNISH ALL BRACKETS REQUIRED FOR PROPER INSTALLATION.
- 4. FURNISH DOOR CLOSERS ON ALL FIRE AND SMOKE-RATED OPENINGS
- AS REQUIRED BY THE AHJ AND CODES.
- 5. FURNISH SMOKE AND FIRE SEALS ON ALL FIRE AND SMOKE-RATED OPENINGS AS REQUIRED BY THE A.H.J. AND CODES.
- 6. ALL HARDWARE SHALL BE GRADE 1 WITH BHMA 652 FINISH.
- 7. VERIFY ALL EXISTING HARDWARE IS IN WORKING ORDER. REPAIR ITEMS THAT ARE NON-COMPLIANT.CONTRACTOR SHALL CONFIRM ALL FUNCTIONS WITH OWNER PRIOR TO ORDERING HARDWARE. DOOR HARDWARE SHALL BE PROVIDED AS A COMPLETE FUNCTIONING OPENING WITH THE INTENDED FUNCTION OF THE OWNER.
- 8. ACCESS CONTROL CONTRACTOR RESPONSIBLE FOR SYSTEM REQUIREMENTS TO MEET APPLICABLE EGRESS CODE SECTIONS INCLUDING 1008.1.9.11 STAIRWAY DOORS.

<u>SET #1</u> 1EA LOCK 1EA LEVER

NEW HARDWARE BY ACCESS CONTROL CONTRACTOR

<u>SET #2</u> 3EA HINGES 1EA LOCK 1EA LEVER

NEW HARDWARE BY ACCESS CONTROL CONTRACTOR

SET #3

3EA HINGES - REUSE EXISTING

1EA LOCK

1EA WALL STOP

1EA LEVER

<u>SET #4</u> 3EA HINGES - BALL BEARING 1EA LOCK 1EA WALL STOP

1EA WALL STOP 1EA LEVER

<u>SET #5</u> 3EA HINGES - REUSE EXISTING 1EA LOCK 1 EA LEVER - REUSE EXISTING

SET #6

1EA COMMERCIAL GRADE TRACK
2EA BALL BEARING DOOR HANGERS
1EA DOOR BUMPER
1EA DOOR GUIDE
1EA POCKET DOOR LOCK


FLOYD COUNTY
ANNEX
RENOVATION 2ND
& 3RD FLOORS 120
W. SPRING

NEW ALBANY INDIANA

DOOR SCHEDULE AND DETAILS

REVISIONS

2 ADDENDUM #2 07.07.25

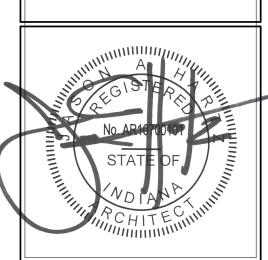



FCI2501
DATE

JUNE 12, 2025
SHEET NUMBER

A14.1

			TINI	KIUK	FINISH LEGE	IND - IADLE	
FINISH CODE	DESCRIPTION	MANUFACTURER	PRODUCT	NUMBER	COLOR	FINISH/SIZE	NOTES
BASE							
RB-I	RUBBER BASE	JOHNSONITE	DURACOVE TRADITIONAL WALL BASE		MATCH TO EXISTING	4'	2ND FLOOR EAST
RB-2	RUBBER BASE	JOHNSONITE	DURACOVE TRADITIONAL WALL BASE	DC40	BLACK	4'	2ND FLOOR WEST
WDB-I	WOOD BASE				SŧV-I	MATCH EXISTING PROFILE, SPECIES, AND CUT	
CASEWORK							
PL-1	PLASTIC LAMINATE	WILSONART	STANDARD LAMINATE			FINE VELVET	VERTICAL SURFACES
PL-2	PLASTIC LAMINATE	WILSONART	STANDARD LAMINATE			FINE VELVET	HORIZONTAL SURFACES
S#V	STAIN AND VARNISH				MATCH TO EXISTING	MATCH TO EXISTING	
CEILING							
ACT- I	ACOUSTICAL CEILING TILE	USG	RADAR		WHITE	MATCH TO EXISTING	CONTRACTOR TO VERIFY MATCH TO EXISTIN 2ND \$ 4TH FLOOR
ACT-2	ACOUSTICAL CEILING TILE	CERTAINTEED	CASHMERE STYLE EDGE	CMTS-124	MATCH TO EXISTING	TIER NARROW REVEAL 24"X24"	3RD FLOOR
PT-5	PAINT	SHERWIN WILLIAMS	PROMAR 200 ZERO VOC		CEILING WHITE	EG-SHEL	UNDERSIDE OF BULKHEAD
FLOORING							
CPT-1	CARPET	PATCRAFT	FUTURA	10380	MATCH TO EXISTING	24" X 24"	2ND FLOOR
CPT-2	CARPET	INTERFACE	GREAT LENGTHS II		ENTROBEAN II	IMXIM	3RD FLOOR (DISCONTINUED)
CPT-5	CARPET	PATCRAFT	EXPERIENCE	10291	MATCH TO EXISTING	24" X 24"	STAIRWELL
LVT- I	LUXURY VINYL TILE PLANKS	TEKNOFLOR	RARE PLANK HPD	89003RP	AMERICAN WALNUT (MATCH EXISTING DOOR STAIN)	7.09" X 47.24", 3MM THICKNESS, 20 MIL WEAR LAYER	20 YR. WARRANTY (MIN) INSTALLATION METHOD: RANDOM STAGGER
LVT-2	LUXURY VINYL TILE PLANKS	TBD				3MM THICKNESS, 20 MIL WEAR LAYER	20 YR. WARRANTY (MIN) INSTALLATION METHOD: RANDOM STAGGER
TILE							
T-1	TILE - FLOOR						EXISTING TO REMAIN
	·	•	1	1		•	
WALL PT- I	PAINT	SHERWIN WILLIAMS	PROMAR 200		MATCH TO EXISTING	EG-SHEL	PAINT ENTIRE EXTENT OF WALLS TO
1 1-1	AINI	JILKWIN WILLIAMS	ZERO VOC		IVIATOTI TO EXISTING	LG-JIILL	EACH ADJACENT INSIDE CORNER
PT-2	PAINT	SHERWIN WILLIAMS	PROMAR 200 ZERO VOC		MATCH TO EXISTING	EG-SHEL	PAINT ENTIRE EXTENT OF WALLS TO EACH ADJACENT INSIDE CORNER

ALL MATERIAL SUBSTITUTIONS SUBJECT TO SPECIFICATION SECTION 0 | 6005


# GENERAL FINISH SCHEDULE NOTES


- A. PATCH AND REPAINT TO MATCH EXISTING WALL CORNER TO CORNER IN ROOMS WHERE WORK IS BEING COMPLETED BUT EXISTING FINISHES TO REMAIN.
- B. IN ROOMS WITH NO WORK BEING COMPLETED EXISTING FINISHES TO REMAIN. PROTECT DURING CONSTRUCTION TO ADJACENT AREAS.
- C. ALL ELECTRICAL DEVICES AND COVERS TO MATCH EXISTING.


  D. USE MANUFACTURER'S RECOMMENDED INSTALLATION METHODS AND MATERIALS FOR ALL FINISHES


# FLOORING TRANSITIONS

NOTE: MATCH COLOR OF FLOORING TRANSITION STRIP TO COLOR OF NEW FLOORING MATERIAL

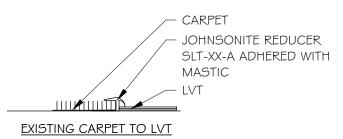

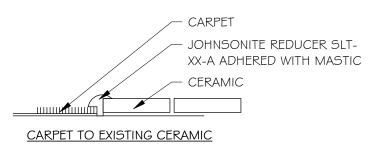

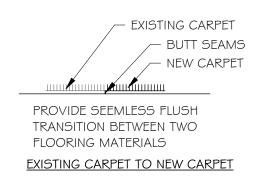

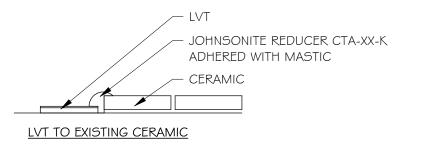

					Roo	m Scl	hedule	
NO	ROOM NAME	FLOOR FINISH	BASE TYPE	BASE FINISH	WALL MATERIAL	WALL FINISH	CEILING TYPE	COMMENTS
Α	STAIR	ETR	ETR	ETR	ETR	ETR	ETR	
В	STAIR	ETR	ETR	ETR	ETR	ETR	ETR	
С	ELEVATOR	ETR	ETR	ETR	ETR	ETR	ETR	
2ND FLO	OR					~~~	2	
200	ELEVATOR LOBBY	ETR	ETR	ETR	ETR	PAINT	ETR	
201	PUBLIC LOBBY	LVT- I	WOOD	SŧV	DRYWALL	PAINT	ACT / DW	
202	SUPPLIES/ RECORDS	ETR	ETR	ETR	ETR	PAINT	ETR	
203	TREASURER STAFF	CPT- I	WOOD	SŧV	DRYWALL	PAINT	ACT	
204	DEPUTY TREASURER	CPT- I	WOOD	S¢V	DRYWALL	PAINT	ACT	PROTECT EXISTING FINISHES DURING CONSTRUCTION AND PATCH AS REQUIRED
205	SHARED MEETING	ETR	ETR	ETR	ETR	PAINT	ETR	PROTECT EXISTING FINISHES DURING CONSTRUCTION AND PATCH AS REQUIRED
206	TREASURER	CPT- I	WOOD	S¢V	DRYWALL	PAINT	ACT	PROTECT EXISTING FINISHES DURING CONSTRUCTION AND PATCH AS REQUIRED
207	WORK AREA	ETR	ETR	ETR	ETR	PAINT	ETR	
208	RESERVED	ETR	ETR	ETR	ETR	PAINT	ETR	
209	HALL	ETR	ETR	ETR	ETR	PAINT	ETR	PROTECT EXISTING FINISHES DURING CONSTRUCTION AND PATCH AS REQUIRED
210	RESERVED	ETR	ETR	ETR	ETR	PAINT	ETR	
211	I.T.	ETR	ETR	ETR	ETR	PAINT	ETR	
212	JANITOR MEN'S	ETR ETR	ETR	ETR	ETR ETR	PAINT ETR	ETR	
213	WOMEN'S	ETR	ETR ETR	ETR ETR	ETR	ETR	ETR ETR	
214	STAFF LOBBY	ETR	ETR	ETR	ETR	PAINT	ETR	
216	PAYROLL CLERK	ETR	ETR	ETR	ETR	PAINT	ETR	
217	HALL	ETR	ETR	ETR	ETR	PAINT	ETR	PROTECT EXISTING FINISHES DURING CONSTRUCTION AND PATCH AS REQUIRED
218	AUDITOR	CPT-1	WOOD	S\$V	DRYWALL	PAINT	ACT	PROTECT EXISTING FINISHES DURING CONSTRUCTION AND PATCH AS REQUIRED
218A	SUPPLIES/ RECORDS	ETR	ETR	ETR	ETR	PAINT	ETR	TROTEOT EXISTING FINISHES DOMING GONSTIQUENT MAD FATIGHT AS REGULED
219	DEPUTY AUDITOR	CPT- I	WOOD	S\$V	DRYWALL	PAINT	ACT	PROTECT EXISTING FINISHES DURING CONSTRUCTION AND PATCH AS REQUIRED
220	STORAGE	ETR	ETR	ETR	ETR	PAINT	ETR	
221	AP CLERK	ETR	ETR	ETR	ETR	PAINT	ETR	
222	WORK AREA	ETR	ETR	ETR	ETR	PAINT	ETR	
223	TAX MANAGER	ETR	ETR	ETR	ETR	PAINT	ETR	PROTECT EXISTING FINISHES DURING CONSTRUCTION AND PATCH AS REQUIRED
224	MECHANICAL / I.T.	ETR	ETR	ETR	ETR	PAINT	ETR	
225	ELECTRICAL	ETR	ETR	ETR	ETR	PAINT	ETR	
226	AUDITOR STAFF	CPT- I	WOOD	SŧV	DRYWALL	PAINT	ACT	
3RD FLO	OP.				•	سس	,	
300	ELEVATOR LOBBY	ETR	ETR	ETR	ETR	ETR	ETR	
301	LOBBY	ETR	ETR	ETR	ETR	ETR	ETR	
302	SUPPLIES	ETR	ETR	ETR	ETR	ETR	ETR	
303	EXECUTIVE ASSISTANT	ETR	ETR	ETR	ETR	ETR	ETR	
304	HUMAN RESOURCES	ETR	ETR	ETR	ETR	ETR	ETR	
305	RESERVED	ETR	ETR	ETR	ETR	ETR	ETR	
306	COMMISIONERS/ COUNCIL SHARED	ETR	ETR	ETR	ETR	ETR	ETR	
307	RESTROOM	ETR	ETR	ETR	ETR	ETR	ETR	
308	COFFEE	ETR	ETR	ETR	ETR	ETR	ETR	
309	SHARED MEETING	ETR	ETR	ETR	ETR	ETR	ETR	
310	I.T.	ETR	ETR	ETR	ETR	ETR	ETR	
311	MECHANICAL	ETR	ETR	ETR	ETR	ETR	ETR	
312	SUPPLIES	ETR	ETR	ETR	ETR	ETR	ETR	
313	RESERVED	ETR	ETR	ETR	ETR	ETR	ETR	
314	STORAGE	ETR	ETR	ETR	ETR	ETR	ETR	
315	STAFF LOBBY	ETR	ETR	ETR	ETR	ETR	ETR	
316	RESTROOM	ETR	ETR	ETR	ETR	ETR	ETR	
317	RESTROOM	ETR	ETR	ETR	ETR	ETR	ETR	
318	CORRIDOR	ETR	ETR	ETR	ETR	ETR	ETR	
319	RESERVED REGERVED	ETR	ETR	ETR	ETR	ETR	ETR	
200	RESERVED	ETR	ETR	ETR	ETR ETR	ETR ETR	ETR ETR	
320	DEGEDI/ED	ETD	FTD	- 1   1 J			(1 15	
321	RESERVED	ETR	ETR	ETR				
	RESERVED RESERVED RESERVED	ETR ETR ETR	ETR ETR ETR	ETR ETR	ETR ETR	ETR ETR	ETR ETR	


FLOYD COUNTY
ANNEX
RENOVATION 2ND
& 3RD FLOORS 120
W. SPRING

NEW ALBANY INDIANA

ROOM FINISH SCHEDULE

REVISIONS

2 ADDENDUM #2 07.07.25

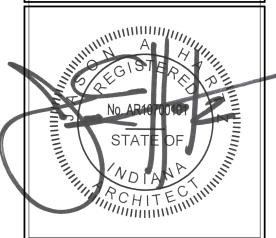



FCI2501
DATE

JUNE 12, 2025
SHEET NUMBER

A15.1

DUCT-MOUNTED SUPPLY DIFFUSER WITH CFM

# SITE/PROJECT SPECIFIC REQUIREMENTS

- EXISTING FINISHES CONTRACTOR SHALL PROTECT ALL EXISTING FINISHED SURFACES (FLOORS, WALLS, CEILINGS, STEPS, RAILINGS, FURNISHINGS, ETC.) FROM DAMAGE DURING THE PROJECT. CONTRACT SHALL PAY ALL COSTS INCURRED TO REPAIR OR REPLACE COMPONENTS DAMAGED AS A RESULT OF WORK DONE FOR THE PROJECT.
- 2. TEMPORARY REMOVAL OF COMPONENTS CONTRACTOR MAY TEMPORARILY REMOVE EXISTING DOORS, RAILINGS, FURNISHINGS, ETC. WHILE LOADING AND UNLOADING EQUIPMENT. CONTRACTOR SHALL STORE AND PROTECT ANY ITEMS FROM DAMAGE. CONTRACTOR SHALL PROMPTLY REINSTALL OR REPLACE ANY REMOVED COMPONENTS ONCE ADDITIONAL CLEARANCE IS NOT NEEDED.
- 3. CONTRACTOR SHALL TEMPORARILY REMOVE EXISTING CEILING-MOUNTED EQUIPMENT AS NEEDED TO PERFORM WORK. REMOVED ITEMS SHALL BE SAVED AND REINSTALLED PRIOR TO COMPLETION OF PROJECT.

# **GENERAL HVAC DEMOLITION NOTES**

- 1. VERIFY EXACT SIZE AND LOCATION OF EXISTING UTILITIES PRIOR TO START OF DEMOLITION
- 2. UNLESS OTHERWISE NOTED, REMOVAL OF PIPING AND/OR EQUIPMENT SHALL INCLUDE ALL INSULATION, VALVES, HANGERS, SUPPORTS, EQUIPMENT PADS, FLASHING, ROOF CURBS, CONTROLS, AND ASSOCIATED VALVES, FITTINGS AND ACCESSORIES.
- 3. UNLESS OTHERWISE NOTED, REMOVAL OF PIPING SHALL BE BACK TO THE MAIN OR LAST ACTIVE SERVICE. REMAINING PIPE SHALL BE CAPPED.
- 4. ALL OPENINGS OR HOLES LEFT IN EXISTING WALLS, FLOORS, AND CEILINGS TO REMAIN, INCLUDES CHASES, SHALL BE PATCHED TO MATCH EXISTING CONDITIONS BY THE CONTRACTOR WHOSE WORK HAS CREATED THE OPENING OR HOLE.
- EXISTING CONDITIONS WERE OBTAINED THROUGH FIELD OBSERVATION AND AVAILABLE DRAWINGS.
- 6. DISCONNECT ALL HEATING PIPING CONNECTIONS AND DUCTWORK CONNECTIONS TO EQUIPMENT BEING REMOVED.
- 7. REMOVAL OF CONTROLS SHALL INCLUDE ALL WIRING BACK TO SOURCE INCLUDING ANY SUPPORTS, BOXES, CONDUITS AND ACCESSORIES.
- 8. REMOVAL OF PNEUMATIC CONTROLS SHALL INCLUDE ALL PNEUMATIC TUBING AND ACCESSORIES. REMOVE PIPING AND CAP AT LAST ACTIVE SOURCE.
- 9. DISCONNECT ALL DUCTWORK CONNECTIONS TO EQUIPMENT BEING REMOVED.

# **GENERAL HVAC NOTES**

- 1. DUCTWORK AND PIPING IS SHOWN IN SCHEMATIC FORM ONLY, OFFSETS AND CHANGES IN ELEVATIONS ARE NOT NECESSARILY SHOWN. ROUTE DUCTWORK IN AN ORDERLY MANNER AS REQUIRED FOR CLEARANCE WITH STRUCTURAL CONDITIONS. COORDINATE LOCATION OF DUCTWORK WITH OTHER TRADES PRIOR TO INSTALLATION.
- COORDINATE LOCATIONS AND SIZES OF CONNECTIONS TO EQUIPMENT WITH ALL TRADES.
- CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ADEQUATE SUPPORTING SYSTEMS AND DEVICES FOR ALL DUCTWORK, PIPING, HVAC EQUIPMENT, AND ACCESSORIES.
- 4. PROVIDE AND INSTALL SLEEVES FOR ALL DUCTWORK AND PIPING PASSING THROUGH WALLS AND FLOORS.
- 5. PROVIDE RIGID METAL DUCT, WITH NO EXCEPTION, WHERE FIRE AND/OR SMOKE RATED WALLS, CEILINGS, AND FLOORS ARE PENETRATED.
- 6. LOCATE AND INSTALL ALL HVAC EQUIPMENT TO PROVIDE MANUFACTURER'S MINIMUM SERVICE CLEARANCES.
- 7. CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH ISOLATION VALVES AND UNIONS TO FACILITATE EQUIPMENT REMOVAL.
- PIPING IS SHOWN IN SCHEMATIC FOR ONLY, CHANGES IN ELEVATION ARE NOT NECESSARILY SHOWN. ROUTE PIPING IN AN ORDERLY MANNER AS REQUIRED FOR CLEARANCE WITH STRUCTURAL CONDITIONS. COORDINATE LOCATION OF PIPING WITH OTHER TRADES PRIOR TO INSTALLATION. WHERE POSSIBLE, RACK PIPING HORIZONTALLY OR VERTICALLY.
- 9. SEE HEATING DETAILS FOR EXACT PIPING CONNECTIONS TO EQUIPMENT, INCLUDING VALVES, TRAPS, AND SYSTEM ACCESSORIES.
- 10. BALANCING VALVES SHALL BE, AT MINIMUM, ONE PIPE SIZE SMALLER THAN THE PIPING IN WHICH THEY ARE INSTALLED. CONTRACTOR SHALL VERIFY THAT VALVE CAN BE ADJUSTED TO MEET FLOW REQUIREMENTS WITHOUT THE PRODUCTION OF UNACCEPTABLE NOISE.
- 11. THE LOCATIONS AND SIZES OF EXISTING DUCTWORK, PIPING, AND EQUIPMENT HAS BEEN TAKEN FROM "AS-BUILT" DRAWINGS AND INFORMATION PROVIDED BY THE OWNER. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO START OF WORK.
- 12. ALL CONNECTIONS TO, OR SHUTDOWNS OF, EXISTING SYSTEMS SHALL BE COORDINATED WITH THE OWNER TO PROVIDE MINIMUM INTERFERENCE WITH THEIR OPERATION AND DOWNTIME OF THE SYSTEM.
- 13. SEAL ALL PENETRATIONS OF FIRE AND SMOKE RATED WALLS, CEILINGS, AND FLOORS IN ACCORDANCE WITH THE PROJECT MANUAL. CORRIDOR WALLS THAT ARE BUILT TO DECK SHALL BE TREATED AS FIRE RATED WALLS.

DESIGN FIRM REGISTRATION NO. 184-0004

25001 ENVOY - FLOYD COUNTY ANNEX RENNOVATION

ESIGNED BY:	ARW
RAWN BY:	ARW
HECKED BY:	NTP
ATE CHECKED:	05/16/25

07/03/25 ADDENDUM #1

DATE REVISION

MECHANICAL GENERAL NOTES LEGEND AND ABBREVIATIONS

PROJECT No. E07825001

H-0.01

1. SEE SHEET H-001 FOR SYMBOLS AND ABBREVIATIONS.


# **# DEMOLITION KEYNOTES**

- REMOVE EXISTING SUPPLY DIFFUSER AND FLEX DUCTWORK.
  REMOVE EXISTING RETURN GRILLE.
  REMOVE EXISTING EXHAUST GRILLE. CAP EXISTING EXHAUST DUCTWORK.
  REMOVE EXISTING FLEX DUCTWORK.
  REMOVE EXISTING THERMOSTAT. THERMOSTAT TO BE RELOCATED. SEE H-2.01.

# **# KEYNOTES (THIS SHEET)**

- 1. EXISTING SUPPLY DIFFUSERS AND RETURN GRILLES TO REMAIN.
- 2. EXISTING 5 TON HEAT PUMP TO REMAIN.
- 3. EXISTING EXHAUST GRILLE TO REMAIN.
- 4. EXISTING RETURN GRILLE TO REMAIN.
- 5. EXISTING SUPPLY DUCTWORK ABOVE CEILING TO REMAIN.



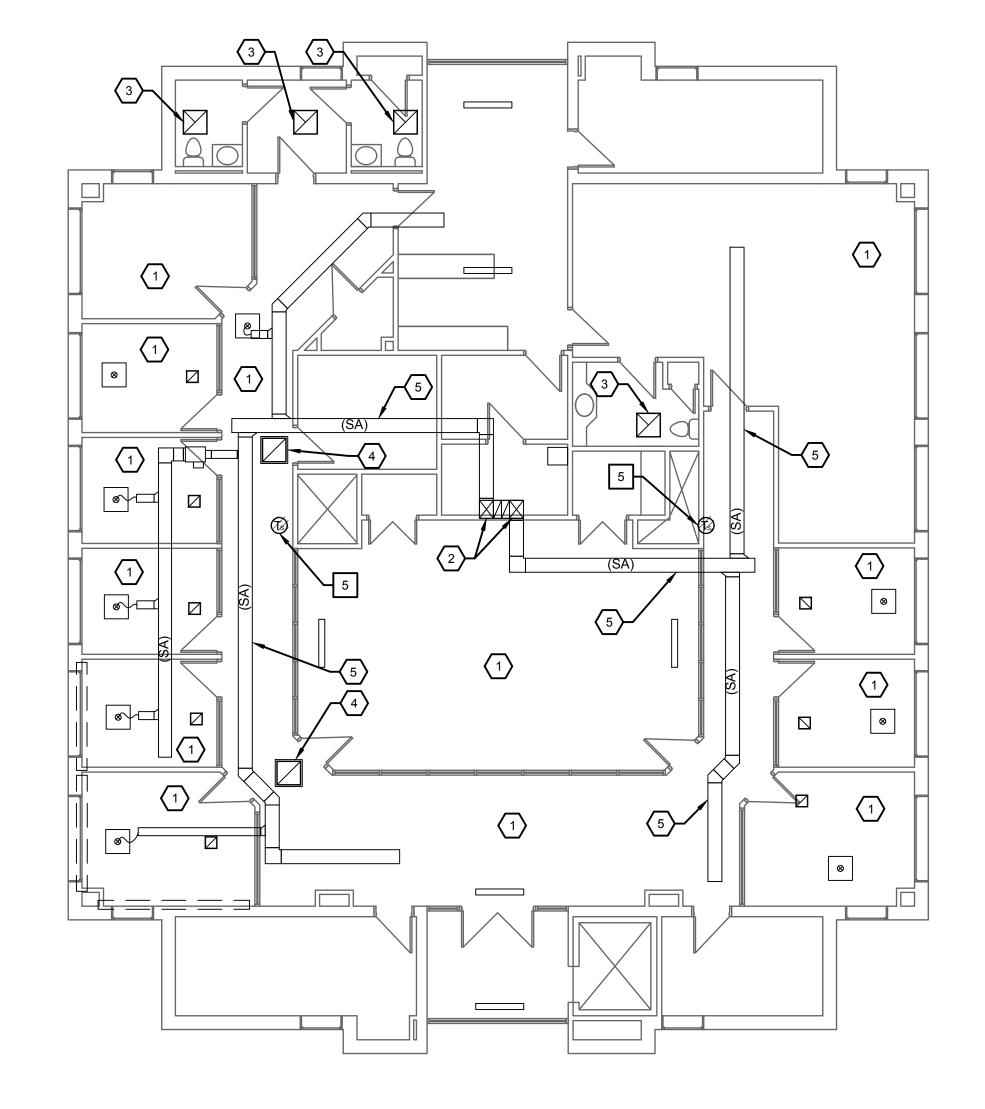



DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25


07/03/25 ADDENDUM #1


DATE REVISION

PROJECT No. E07825001


DRAWING No. H-1.01

NOTE: DIMENSIONAL DATA IS NOT TO BE OBTAINED BY SCALING ANY PORTION OF THIS DRAWING.

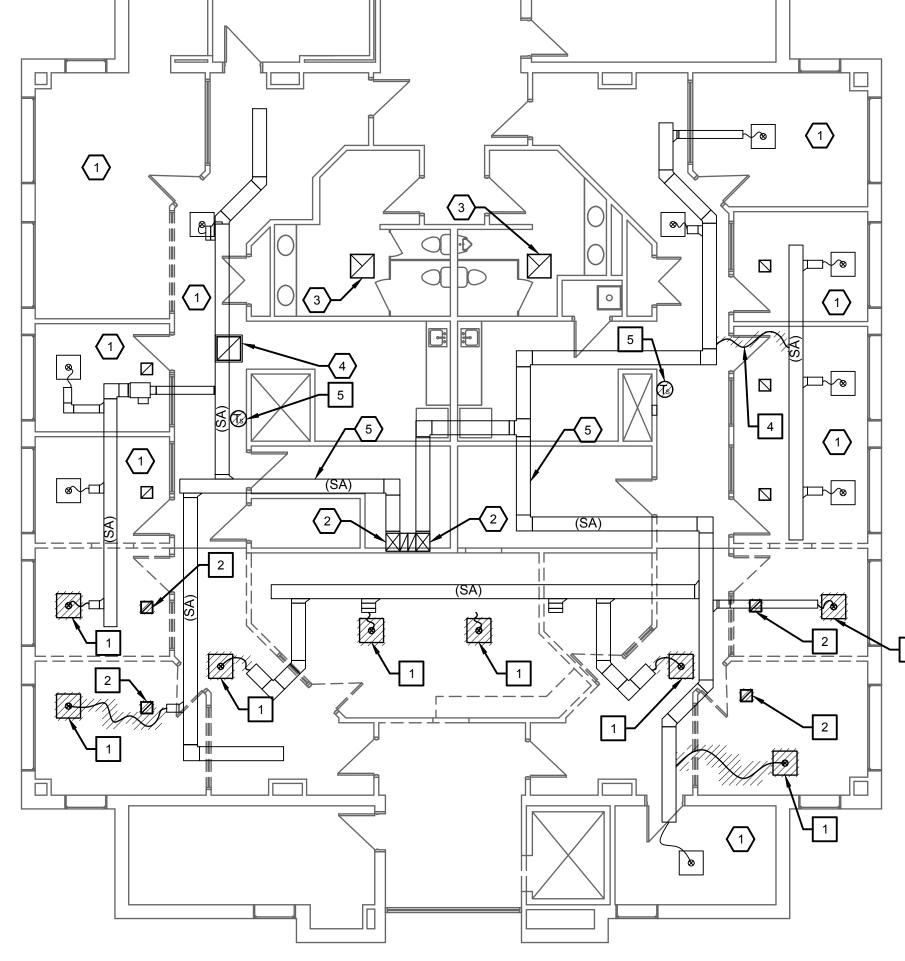





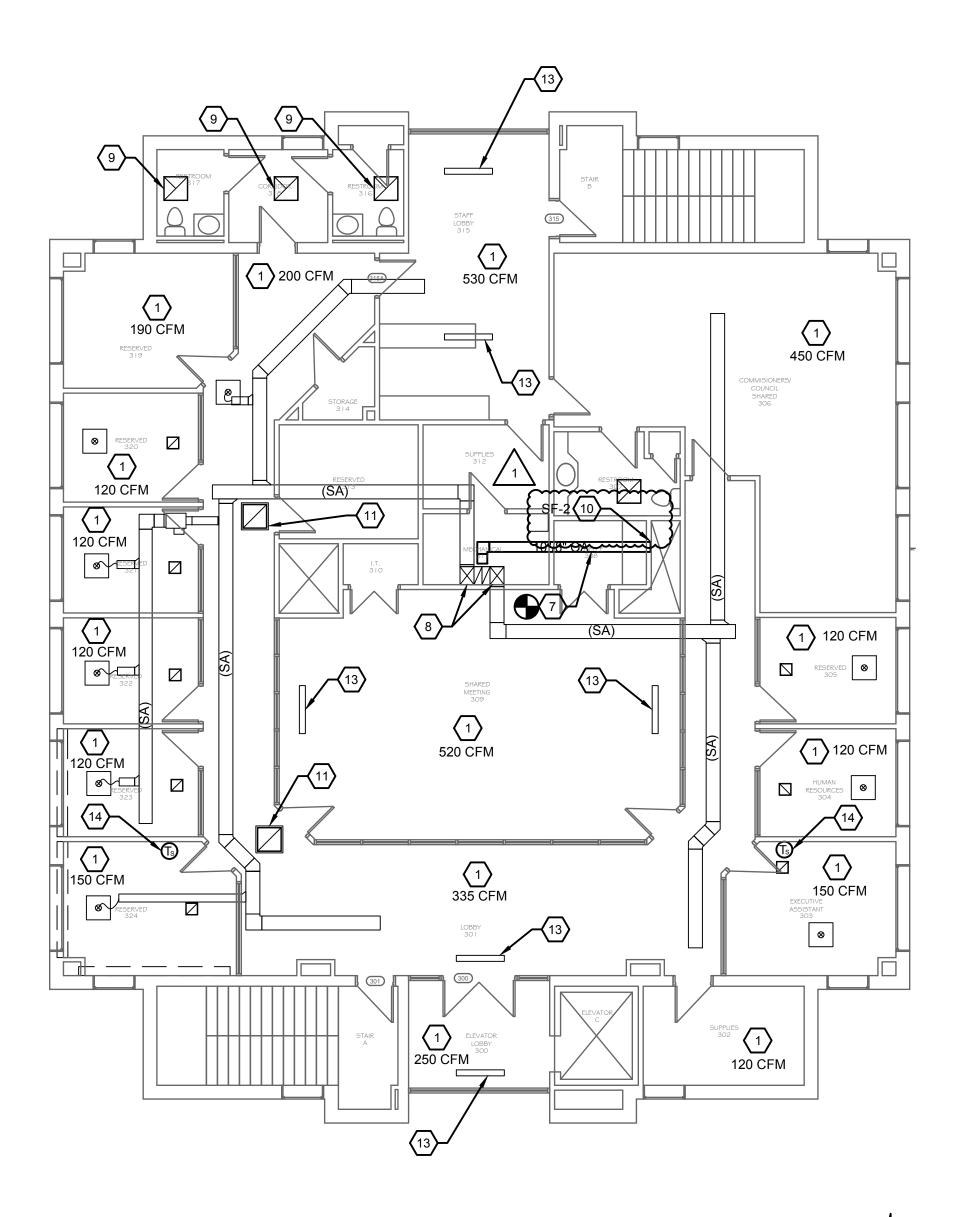



- 1. SEE SHEET H-001 FOR SYMBOLS AND ABBREVIATIONS.
- 2. SECOND AND THIRD FLOORS ARE PLENUM RETURN.

# **(#) KEYNOTES (THIS SHEET)**

- 1. EXISTING SUPPLY DIFFUSERS AND RETURN GRILLES TO REMAIN. CONTRACTOR TO FIELD VERIFY NUMBER OF GRILLES AND DIFFUSERS. PROVIDE NEW BALANCING DAMPER FOR ALL SUPPLY DIFFUSERS. BALANCE DIFFUSERS TO CFM LISTED PER ROOM
- 2. NEW SUPPLY DIFFUSER. PROVIDE NEW BALANCING DAMPER. BALANCE ALL DIFFUSERS TO CFM LISTED PER ROOM. PROVIDE FLEX DUCTWORK CONNECTION. SEE SCHEDULE.
- 3. NEW RETURN GRILLE. SEE SCHEDULE.
- 4. NEW SUPPLY DIFFUSER. SEE SCHEDULE.
- 5. NEW SUPPLY DUCTWORK. MATCH EXISTING SUPPLY DUCTWORK SIZE. MAKE CONNECTION TO EXISTING SUPPLY DUCTWORK.
- CONNECTION TO EXISTING SUFFLY DOCTWORK.
- 6. NEW SUPPLY DUCTWORK. MAKE CONNECTION TO EXISTING SUPPLY DUCTWORK.7. NEW OUTDOOR AIR DUCTWORK. MAKE CONNECTION TO EXISTING RETURN
- DUCTWORK ABOVE CEILING ABOVE EXISTING HEAT PUMP UNIT.
- 8. EXISTING 5 TON HEAT PUMP TO REMAIN.
- 9. EXISTING EXHAUST GRILLE TO REMAIN.
- 10. PROVIDE NEW INLINE SUPPLY FAN ABOVE CEILING. MAKE CONNECTION TO EXISTING OA DUCTWORK. FAN SHALL RUN BASED ON EXISTING HEAT PUMP OPERATIONS. RUN FAN WHENEVER HEAT PUMPS ARE RUNNING. SEE SCHEDULE.
- 11. EXISTING RETURN GRILLE TO REMAIN.
- 12. EXISTING OUTDOOR AIR DUCTWORK IN EXISTING SHAFT.
- 13. EXISTING LINEAR SLOT DIFFUSER TO REMAIN. PROVIDE NEW BALANCING DAMPER. BALANCE ALL DIFFUSERS TO CFM LISTED PER ROOM.
- 14. RELOCATE EXISTING TSTAT TO NEW LOCATION. PROVIDE NEW WIRE BACK TO UNIT. MAKE FINAL CONNECTION. ROUTE NEW WIRING IN EXISTING WALL CAVITY AND UP ABOVE CEILING.

ark) jet

325001 ENVOY - FLOYD COUNTY ANNEX RENNOVATION

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25

07/03/25 ADDENDUM #1

\_\_\_\_\_

DATE REVISION

ID & THIRD FLOOR ANICAL NEW PLAN

PROJECT No. E07825001

DRAWING No.
H-2.01

GRI	LLES & DIFFUSE	R SCHE	DULE								
		FACE	AIR	THROW				MAX N.C.		DESIG	NBASIS
TAG	TYPE	SIZE	PATTERN	(FEET)	MOUNTING	MATERIAL	FINISH	H LEVEL	NOTES	MANUFACTURER	MODEL NUMBER
SD-1	SQUARE PLAQUE CEILING DIFFUSER	24x24	4-WAY	VARIES	LAY-IN	ALUMINUM	WHITE	30		PRICE	SPD
RG-1	3/4" LOUVER GRILLE 45 DEGREE	24X24	-	-	LAY-IN	ALUMINUM	WHITE	30		PRICE	600

	SERVICE	AIR VOL.	EYT Q D	MTR.SPEED	MOTOR			ELEC	CTRIC D	ATA		DESIGN	N BASIS
TAG	LOCATION	(CFM)	(IN. W.C.)	(RPM)	HP	DRIVE	FAN TYPE	V	PH	HZ	REMARKS	MANUFACTURER	MODEL NUMBER
SF-1	OA INTAKE 2ND FLOOR	550	0.5	1725	1/6	DIRECT	INLINE	120	1	60	XX	GREENHECK	SQ-95
SF-2	OA INTAKE 3RD FLOOR	550	0.5	1725	1/6	DIRECT	INLINE	120	1	60	XX	GREENHECK	SQ-95

AIR	INLET/O	UTLET C	ONNEC	TION SCHEDULE
SYMBOL	TAG	NECK SIZE	DUCT SIZE	REMARKS
(A1)	SD-1	6"	-	NOTES 1, 2
(A2)	SD-1	8"	-	NOTES 1, 2
<b>B</b> 1	RG-1	-	-	NOTES 1, 2

#### OTES

- UNLESS OTHERWISE NOTED, ALL BRANCH DUCTWORK TO AIR INLET/OUTLET SHALL EQUAL THE SCHEDULED NECK SIZE. PROVIDE TRANSITIONS AS REQUIRED.
- 2. PROVIDE VOLUME DAMPER FOR EACH DIFFUSER.



25001 ENVOY - F COUNTY ANNEX RENNOVATION

DATE REVISION

ECHANICAL SCHEDULE

PROJECT No. E07825001


H-4.01

NOTE: DIMENSIONAL DATA IS NOT TO BE OBTAINED BY SCALING ANY PORTION OF THIS DRAWING.

DRAWING No.


 $\bigwedge_1$ 




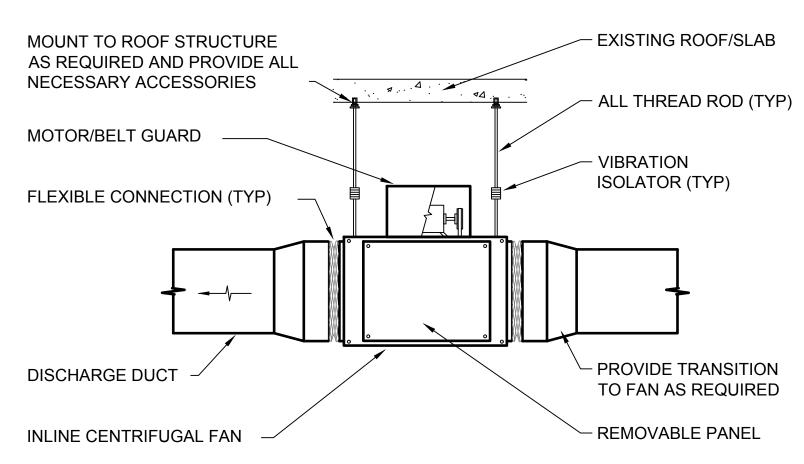

NOTE: SEE ARCHITECTURAL DRAWINGS FOR EXACT ROOF DETAILS



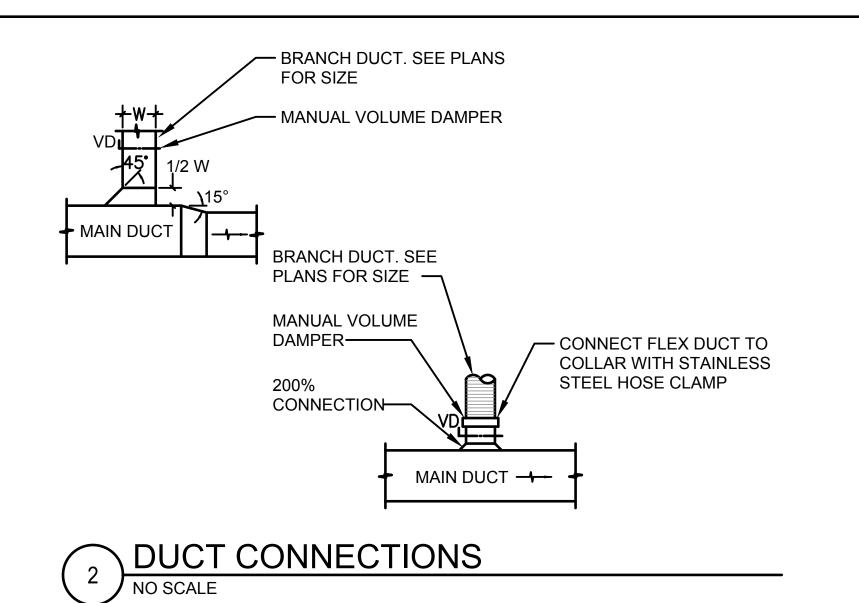

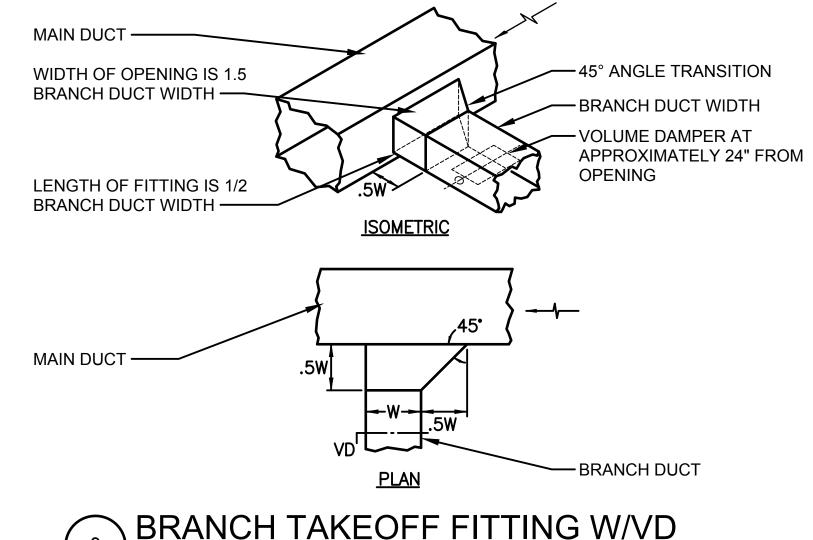

BRANCH TAKEOFF FITTING W/VD
NO SCALE

FLOYD

DESIGNED BY: DRAWN BY:
CHECKED BY:
DATE CHECKED: DATE REVISION

PROJECT No. E07825001


H-5.01

# **ELECTRICAL GENERAL NOTES**

- ALL WORK SHALL CONFORM TO THE 2020 NATIONAL ELECTRICAL CODE AND ALL APPLICABLE CODES, THE MOST CURRENT EDITION OF THE NATIONAL ELECTRICAL SAFETY CODE, AND ALL APPLICABLE LOCAL ORDINANCES.
- 2. CONTRACTOR SHALL FURNISH ALL MATERIALS FOR A COMPLETE AND WORKABLE SYSTEM. ALL MATERIALS FURNISHED BY THE CONTRACTOR ARE TO BE NEW.
- 3. CONTRACTOR SHALL COORDINATE AND SCHEDULE ALL OUTAGES OF POWER, FIRE ALARM, DATA AND TELEPHONE SERVICES WITH THE USING AGENCY. CONTRACTOR SHALL PROVIDE MINIMUM OF 2 WEEKS ADVANCE NOTICE PRIOR TO ANY OUTAGE.
- 4. THE USING AGENCY SHALL HAVE "FIRST RIGHT OF REFUSAL" FOR ALL REMOVED ELECTRICAL EQUIPMENT (PANELS, BREAKERS, ETC...).
- 5. CONTRACTOR IS RESPONSIBLE FOR DISPOSAL OF ALL MATERIALS REMOVED AS PART OF THIS PROJECT THAT THE USING AGENCY DOES NOT WANT TURNED OVER TO THEM. DISPOSAL SHALL BE IN ACCORDANCE WITH ALL APPLICABLE REGULATIONS. ALL DISPOSAL SHALL BE AT THE CONTRACTOR'S EXPENSE.
- 6. ALL PANELBOARDS SHALL BE KEYED WITH A FAB-7 KEY.
- 7. CONTRACTOR SHALL REMOVE ALL UNUSED CONDUIT AND WIRE BACK TO SOURCE. CONCEALED CONDUIT BELOW SLAB, UNDERGROUND, OR IN WALLS MAY REMAIN IN PLACE. UNUSED CONDUITS LOCATED ABOVE SUSPENDED CEILINGS SHALL BE CONSIDERED EXPOSED AND SHALL BE REMOVED.
- 8. ALL EQUIPMENT SHOWN ON THE DRAWINGS IS NEW UNLESS OTHERWISE NOTED AS EXISTING OR RELOCATED.
- 9. ALL CONDUIT PENETRATIONS SHALL BE THE MINIMUM SIZE REQUIRED FOR THE CONDUIT. ALL NEW OR EXISTING OPENINGS BEING USED FOR CONDUIT PENETRATIONS IN EXISTING WALLS, FLOORS AND CEILINGS NOT BEING DEMOLISHED, INCLUDING CHASES, SHALL BE SEALED WITH FIRE CAULK AND PATCHED TO MATCH EXISTING CONDITIONS BY THE CONTRACTOR WHOSE WORK HAS CREATED THE OPENING. IF LARGE HOLES ARE CREATED OR USED, THEN THEY SHALL BE SEALED WITH MASONRY. ALL HOLES IN WALLS WHERE ELECTRICAL EQUIPMENT IS BEING REMOVED (I.E. BOXES, SURFACE RACEWAY, CONDUIT, ETC.) SHALL BE PATCHED AND PAINTED OR HOLES FILLED WITH GROUT TO MATCH EXISTING CONDITIONS BY ELECTRICAL CONTRACTOR. EXISTING UNUSED OPENINGS DO NOT NEED TO BE REPAIRED.
- 10. ALL INTERIOR CONDUIT SHALL BE EMT TYPE (3/4" MINIMUM UNLESS NOTED OTHERWISE). ALL CONDUIT IN TUNNELS AND OUTSIDE SHALL BE RIGID GALVANIZED STEEL.
- 11. CONTRACTOR SHALL PROVIDE BLANK STAINLESS STEEL COVER PLATES FOR ALL UNUSED WALLBOXES.
- 12. ALL INTERIOR SURFACE RACEWAY AND EXPOSED INTERIOR CONDUIT SHALL BE EMT TYPE CONDUIT UNLESS NOTED OTHERWISE.
- 13. CONTRACTOR SHALL INDICATE ALL CORRECT CIRCUIT NUMBERS FOR ALL NEW OR MODIFIED LOADS (I.E. LIGHTING CIRCUITS, ADDED RECEPTACLES, MOTOR LOADS, ETC.) ON THE RECORD DRAWINGS.
- 14. CONTRACTOR SHALL INCLUDE ALL PREMIUM TIME REQUIRED TO PERFORM OUTAGES AS CONVENIENT FOR THE USING AGENCY. NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR
- OUTAGES PERFORMED AT NIGHT, ON WEEKENDS OR ON HOLIDAYS.

  15. CONTRACTOR SHALL INCLUDE ALL PREMIUM TIME REQUIRED TO PERFORM ANY NOISY, DISRUPTIVE OR HAZARDOUS WORK. THIS WORK SHALL BE PERFORMED AFTER NORMAL HOURS OR ON
- 16. ALL BRANCH CIRCUIT WIRING SHALL BE 2#12, 1#12G UNLESS NOTED OTHERWISE. UTILIZE EXISTING CONDUIT WHERE POSSIBLE.
- 17. ALL ELECTRICAL DEVICES (SWITCHES, RECEPTACLES, ETC...) SHALL BE BROWN IN COLOR. ALL COVERPLATES SHALL BE STAINLESS STEEL TYPE.
- 18. THERE HAS BEEN LEAD PAINT ENCOUNTERED IN SOME LOCATIONS WITHIN THE BUILDINGS. IF LEAD PAINT IS ENCOUNTERED THE CONTRACTOR SHALL HANDLE APPROPRIATELY PER SPEC SECTION 02 83.00
- 19. APPLICATION FOR BUILDING CREDENTIAL WILL BE PROVIDED BY THE USING AGENCY AND WILL NEED TO BE FILLED OUT BY THE CONTRACTOR AND RETURNED FOR BADGING PRIOR TO ANY WORK BEING PERFORMED.
- 20. THE CONTRACTOR IS RESPONSIBLE FOR FOLLOWING ALL USING AGENCY PROCEDURES IDENTIFIED IN THE USING AGENCY'S FIRE ALARM SYSTEM DEVICE IMPAIRMENT NOTICE PROCEDURES.
- 21. ONSITE PARKING IS NOT AVAILABLE FOR THE CONTRACTOR'S VEHICLES.
- 22. ALL NEW RECEPTACLE COVERPLATES SHALL BE STAINLESS STEEL. PROVIDE AN ENGRAVED PLATE WITH THE PANEL AND CIRCUIT # FEEDING THE RECEPTACLE MOUNTED TO THE COVERPLATE.
- 23. ALL NEW RECEPTACLES THAT ARE BEING FED FROM AN EMERGENCY PANEL SHALL BE RED IN
- 24. WHERE THE CONTRACTOR ABANDONS CONCEALED CONDUIT IN PLACE, THE CONTRACTOR SHALL PROVIDE A TAG AT EACH END INDICATING "ABANDONED CONDUIT". CONTRACTOR SHALL PLUG ALL CONDUITS THAT THEY ABANDON IN PLACE.

# **ELECTRICAL SYMBOL LIST**

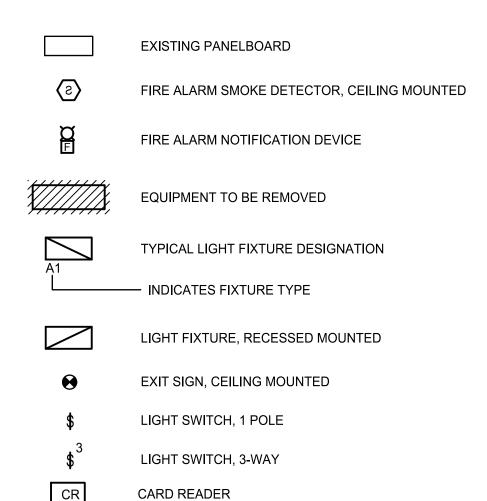

# **ELECTRICAL ABBREVIATIONS**

A	AMPERES		
AC	ABOVE COUNTER	KV	KILO-VOLT
AFF	ABOVE FINISHED FLOOR	KVA	KILO-VOLT AMPERES
ALUM	ALUMINUM	KW	KILOWATTS
ASPH	ASPHALT	LBS	POUNDS
AWG	AMERICAN WIRE GAUGE	MC	MECHANICAL CONTRACTOR
С	CONDUIT	MCC	MOTOR CONTROL CENTER
CKT	CIRCUIT	MCP	MOTOR CIRCUIT PROTECTOR
CLG	CEILING	MFR	MANUFACTURER
CONC	CONCRETE	MLO	MAIN LUG ONLY
CONT	CONTINUED	MMS	MANUAL MOTOR STARTER
CSDS	COMBINATION STARTER/DISC. SW.	MSWB	MAIN SWITCHBOARD
D	DEPTH	NB	NEUTRAL BUS
DDC	DIRECT DIGITAL CONTROL	NW	NEUTRAL WINDING
DN	DOWN	OC	OVERCURRENT
E	ELECTRIC	OL'S	OVERLOAD RELAYS
– EA	EACH	Р	POLE, PUMP
EBJ	EQUIPMENT BONDING JUMPER	PH	PHASE
EC	ELECTRICAL CONTRACTOR	PLC	PROGRAMMABLE LOGIC CONTROLLER
ENC	ENCLOSURE	PRI	PRIMARY
EM	EMERGENCY	RGS	RIGID GALVANIZED STEEL
ETM	ELAPSED TIME METER	RPM	REVOLUTIONS PER MINUTE
FDR	FEEDER	SBJ	SYSTEM BONDING JUMPER
FLA	FULL LOAD AMPERES	SEC	SECONDARY
FLUOR	FLUORESCENT	SS	STAINLESS STEEL
FVNR	FULL VOLTAGE NON-REVERSING	T	TELEPHONE
FV2S	FULL VOLTAGE 2-SPEED	TSP	TWISTED SHIELDED PAIR
G,GND	GROUND	TYP	TYPICAL
GB	GROUND BUS	UL	UNDERWRITER'S LABORATORY
GC	GENERAL CONTRACTOR	UPS	UNINTERRUPTIBLE POWER SUPPLY
GFI	GROUND FAULT INTERRUPTER	V	VOLTS
HP.	HORSEPOWER	VA	VOLT AMPERES
HRG	HIGH RESISTANCE GROUND	VFD	VARIABLE FREQUENCY DRIVE
I/O	INPUT/OUTPUT	W	WATTS
IN	INCHES	WP	WEATHER PROOF
		XFMR	TRANSFORMER


DATE REVISION E07825001

DRAWING No.

E-0.01

NOTE: DIMENSIONAL DATA IS NOT TO BE OBTAINED BY SCALING ANY PORTION OF THIS DRAWING.

SECOND FLOOR LIGHTING DEMO PLAN

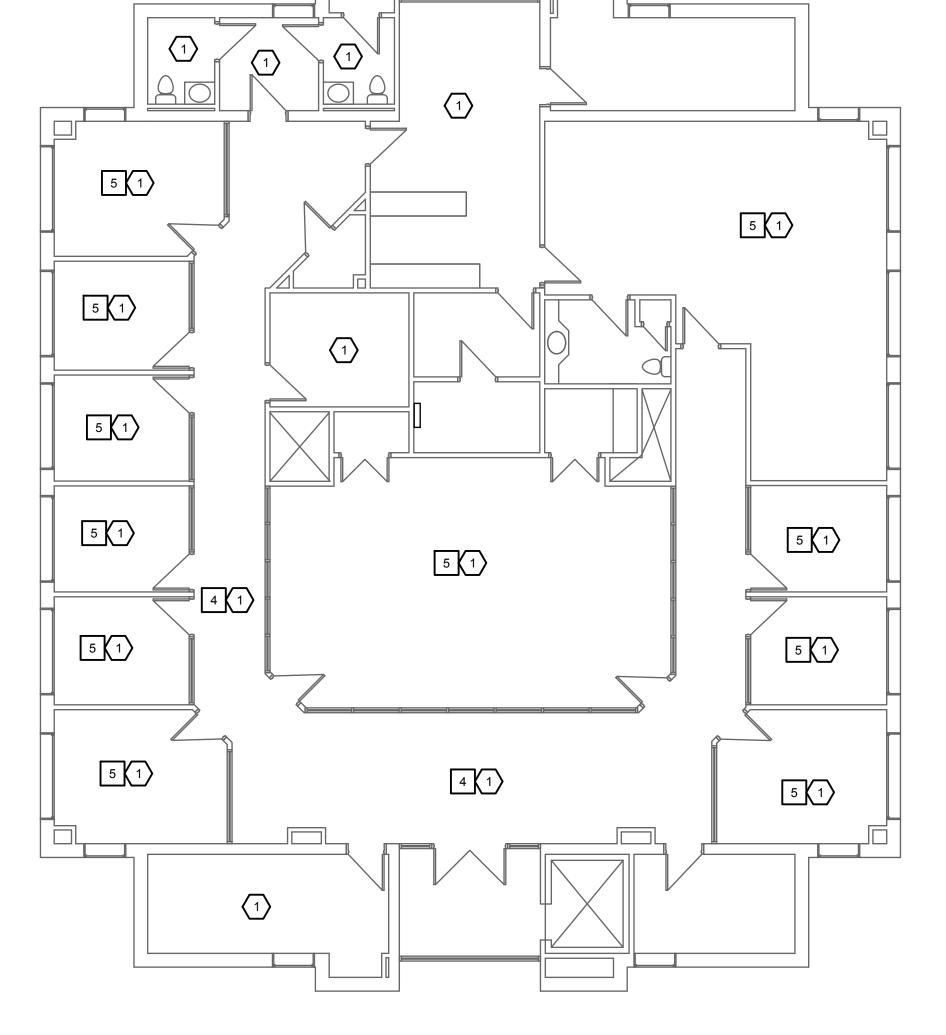





# **NOTES (THIS SHEET)**

- 1. SEE SHEET E-0.01 FOR SYMBOLS AND ABBREVIATIONS.
- 2. ALL EXISTING ELECTRICAL DEVICES AND LIGHTS TO REMAIN UNLESS OTHERWISE NOTED. NOT ALL EXISTING ELECTRICAL DEVICES AND LIGHTS SHOWN.
- 3. ALL EXISTING CEILING MOUNTED DEVICES IN CEILINGS BEING REMOVED FOR CONSTRUCTION ARE TO BE REMOVED AND/OR PROTECTED DURING CONSTRUCTION, AND REINSTALLED AFTER CONSTRUCTION IS COMPLETED, UNLESS OTHERWISE NOTED

# **# DEMOLITION KEYNOTES**

- 1. DISCONNECT AND REMOVE EXISTING 2'X4' FIXTURE. FIXTURE TO BE RELOCATED IN NEW CEILING GRID.
- 2. DISCONNECT AND REMOVE EXISTING 2'X2' FIXTURE.
- 3. DISCONNECT AND REMOVE EXISTING LIGHT SWITCH.
- 4. REMOVE EXISTING 3-WAY SWITCH. PROTECT EXISTING WIRING FOR USE WITH REPLACEMENT DIMMER SWITCHES. SEE SHEET E-2.01.
- 5. REMOVE EXISTING SINGLE POLE SWITCH. PROTECT EXISTING WIRING FOR USE WITH REPLACEMENT DIMMER SWITCH. SEE SHEET E-2.01.

# **# KEYNOTES (THIS SHEET)**

- 1. EXISTING LIGHTING AND CONTROLS IN THIS AREA TO REMAIN.
- 2. EXISTING LIGHTING IN THIS AREA TO REMAIN.
- 3. EXISTING COMBO EXIT EMERGENCY LIGHT TO REMAIN.

CLAIR REGISTRATION NO. 184-000450

825001 ENVOY - FLO COUNTY ANNEX RENNOVATION

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25

07/03/25 ADDENDUM #1

DATE REVISION


COND & THIRD FLOOR GHTING DEMO PLAN


PROJECT No.

E07825001

E-1.01

DRAWING No.



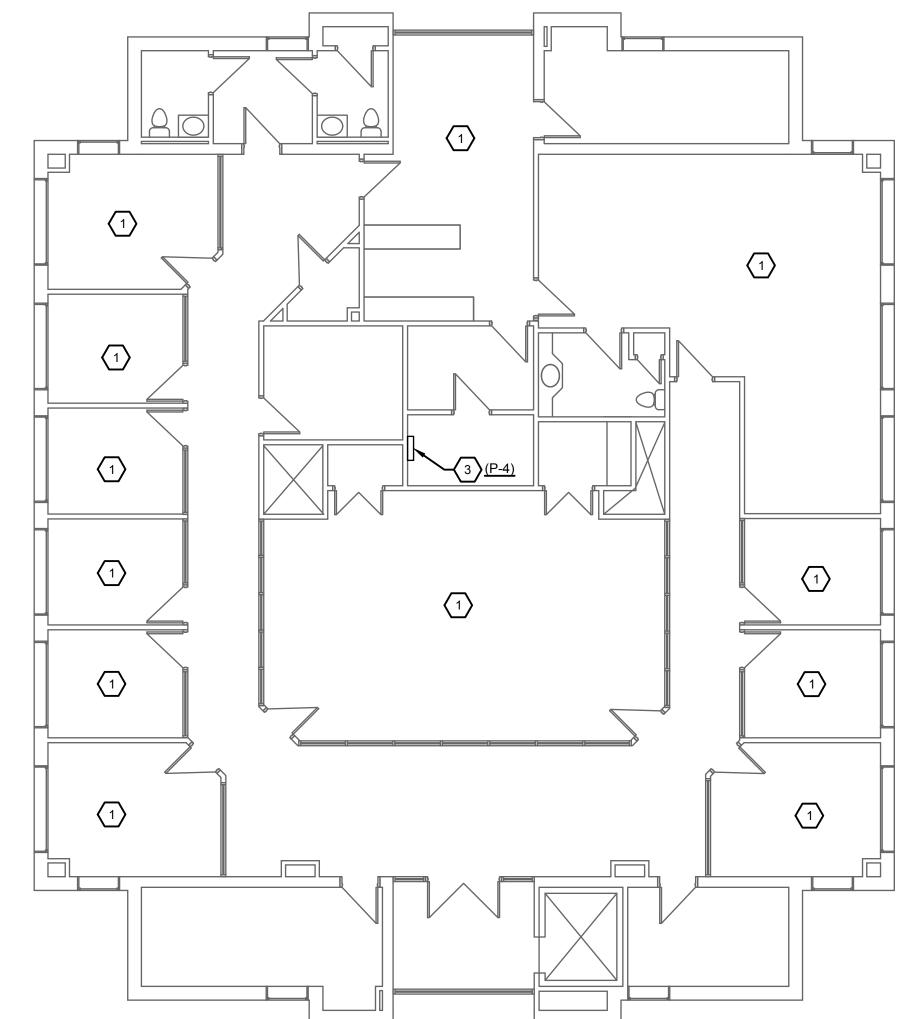

- 1. SEE SHEET E-0.01 FOR SYMBOLS AND ABBREVIATIONS.
- 2. ALL EXISTING ELECTRICAL DEVICES AND LIGHTS TO REMAIN UNLESS OTHERWISE NOTED. NOT ALL EXISTING ELECTRICAL DEVICES AND LIGHTS SHOWN.
- 3. ALL EXISTING CEILING MOUNTED DEVICES IN CEILINGS BEING REMOVED FOR CONSTRUCTION ARE TO BE REMOVED AND/OR PROTECTED DURING CONSTRUCTION, AND REINSTALLED AFTER CONSTRUCTION IS COMPLETED, UNLESS OTHERWISE

# **# DEMOLITION KEYNOTES**

- DISCONNECT AND REMOVE EXISTING DUPLEX RECEPTACLE.
- 2. DISCONNECT AND REMOVE EXISTING QUADPLEX RECEPTACLE.

# **(#) KEYNOTES (THIS SHEET)**

- 1. EXISTING RECEPTACLES IN THIS AREA TO REMAIN.
- 2. EXISTING QUADPLEX RECEPTACLE TO REMAIN.
- 3. EXISTING POWER PANEL TO REMAIN.

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25

07/03/25 ADDENDUM #1

DATE REVISION


PROJECT No.

E07825001

DRAWING No. E-1.11

THIRD FLOOR POWER DEMO PLAN



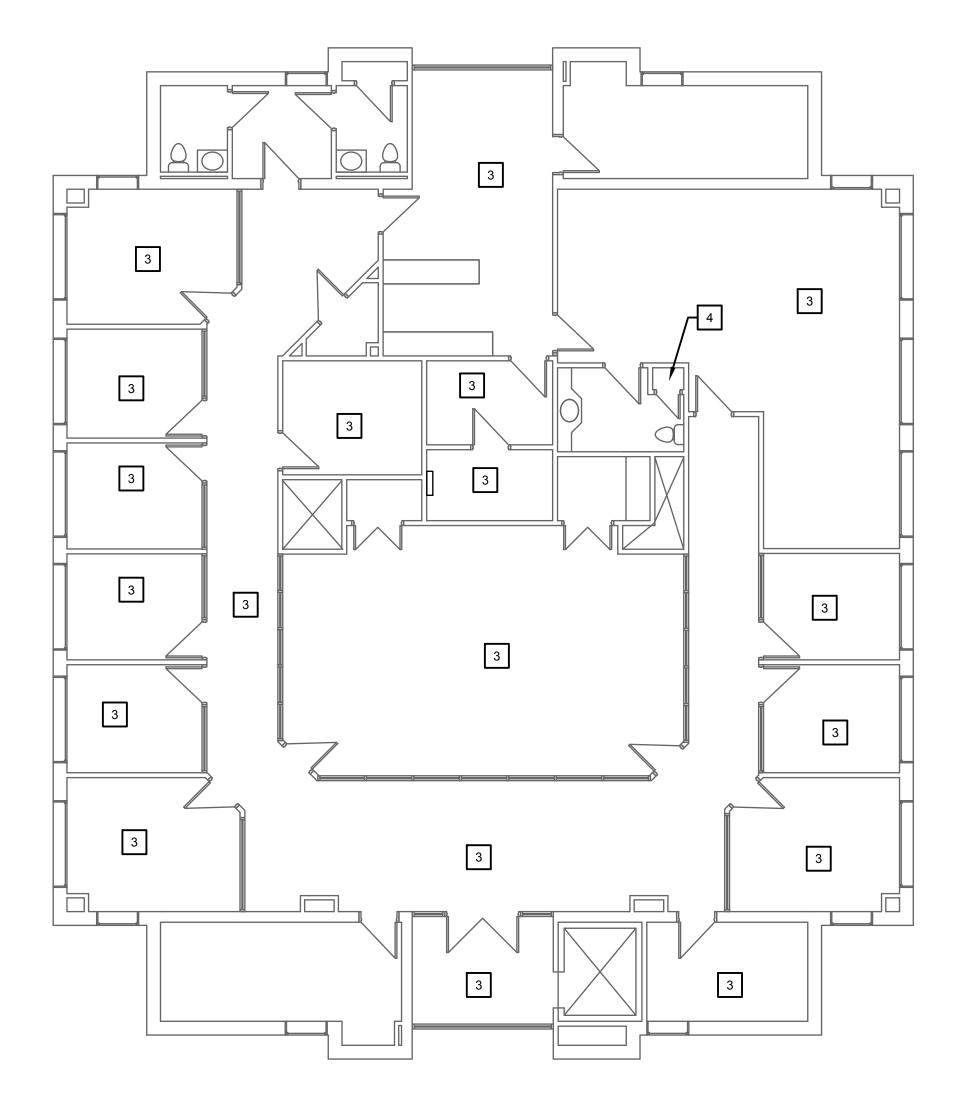



- 1. SEE SHEET E-0.01 FOR SYMBOLS AND ABBREVIATIONS.
- 2. ALL EXISTING ELECTRICAL DEVICES AND LIGHTS TO REMAIN UNLESS OTHERWISE NOTED. NOT ALL EXISTING ELECTRICAL DEVICES AND LIGHTS SHOWN.
- 3. ALL EXISTING CEILING MOUNTED DEVICES IN CEILINGS BEING REMOVED FOR CONSTRUCTION ARE TO BE REMOVED AND/OR PROTECTED DURING CONSTRUCTION, AND REINSTALLED AFTER CONSTRUCTION IS COMPLETED, UNLESS OTHERWISE
- 4. CONTRACTOR SHALL REMOVE ALL EXISTING ACCESS CONTROL DEVICES, CABLING AND SUPPORTING HARDWARE BACK TO SOURCE.
- 5. CONTRACTOR SHALL REMOVE ALL EXISTING VIDEO SURVEILLANCE DEVICES AND CABLING BACK TO SOURCE.
- 6. ALL EXISTING COMMUNICATIONS CABLING WILL BE REPLACED. CONTRACTOR SHALL REMOVE ALL EXISTING DEVICES, WALL PLATE AND CABLING BACK TO SOURCE. EXISTING SUPPORTING HARDWARE SHALL BE PERMITTED TO BE REUSED IF IT IS GOOD CONDITIONS AND MEETS THE REQUIREMENTS OF THE SPECIFICATIONS.

# **# DEMOLITION KEYNOTES**

- DISCONNECT AND REMOVE EXISTING ABANDONED CEILING MOUNTED SPEAKER.
- DISCONNECT AND REMOVE EXISTING DATA DEVICE. REMOVE WIRING BACK TO PATCH PANEL IN EXISTING DATA CLOSET.
- DISCONNECT AND REMOVE EXISTING DATA DEVICES IN THIS AREA. REMOVE WIRING BACK TO PATCH PANEL IN EXISTING DATA CLOSET.
- EXISTING DATA CLOSET. REMOVE EXISTING PATCH PANELS. PROTECT EXISTING RACKS FOR REUSE.

# **#** KEYNOTES (THIS SHEET)

1. EXISTING FIRE ALARM CONTROL PANEL.

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25


07/03/25 ADDENDUM #1

DATE REVISION

PROJECT No. E07825001

DRAWING No. E-1.21



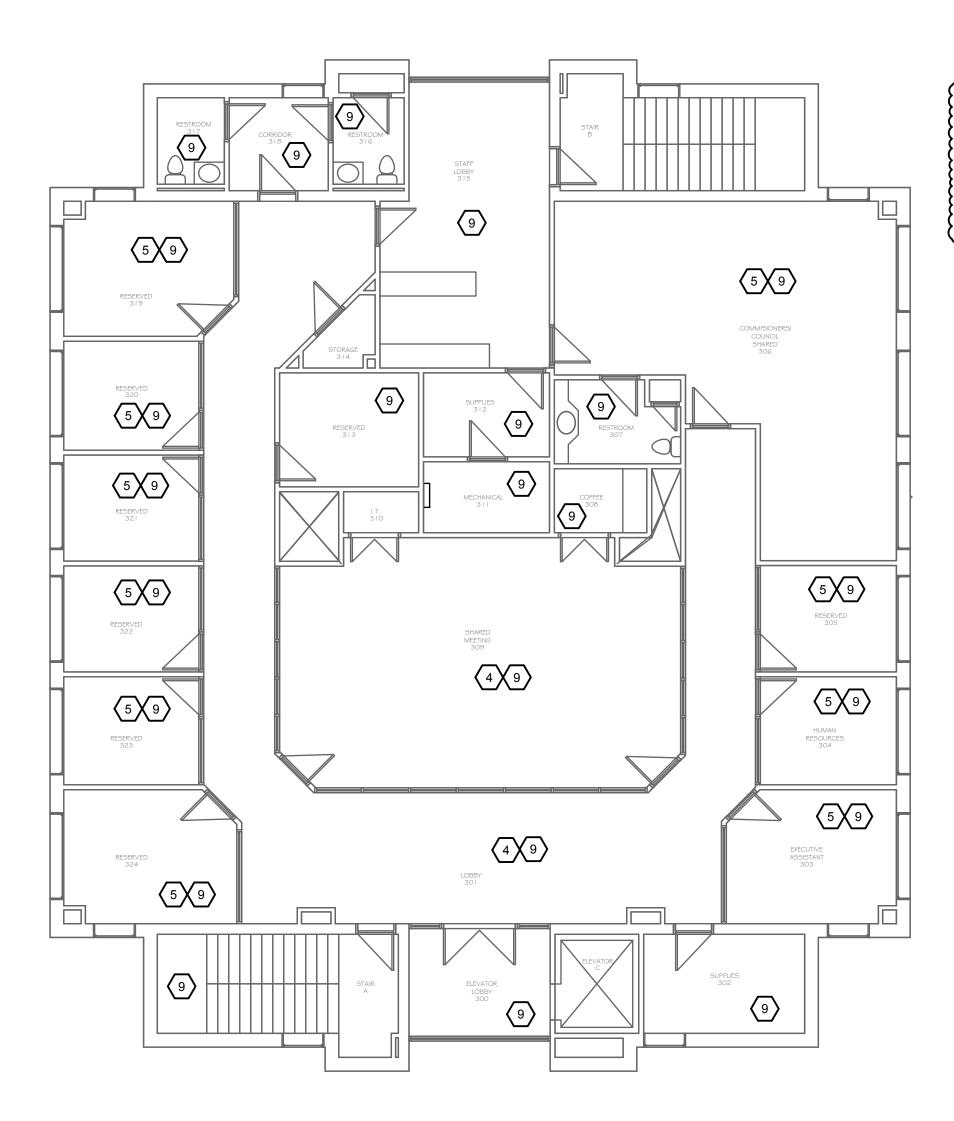



- 1. SEE SHEET E-0.01 FOR SYMBOLS AND ABBREVIATIONS.
- 2. ALL EXISTING ELECTRICAL DEVICES AND LIGHTS TO REMAIN UNLESS OTHERWISE NOTED. NOT ALL EXISTING ELECTRICAL DEVICES AND LIGHTS SHOWN.
- 3. ALL EXISTING CEILING MOUNTED DEVICES IN CEILINGS BEING REMOVED FOR CONSTRUCTION ARE TO BE REMOVED AND/OR PROTECTED DURING CONSTRUCTION, AND REINSTALLED AFTER CONSTRUCTION IS COMPLETED, UNLESS OTHERWISE
- 4. CONNECT NEW EXIT AND EMERGENCY LIGHTS TO AN UNSWITCHED LEG OF THE EXISTING LIGHTING CIRCUIT SERVING THE ADJACENT AREA.

# **#** KEYNOTES (THIS SHEET)

- 1. EXISTING 2'X4' FIXTURE RELOCATED IN NEW CEILING GRID.
- 2. EXISTING 2'X4' FIXTURE TO REMAIN.
- 3. EXISTING 2'X2' FIXTURE TO REMAIN.
- 4. PROVIDE NEW 3-WAY 0-10V DIMMER TO REPLACE EXISTING 3-WAY SWITCHING. PROVIDE 0=10V DIMMING WIRING FROM NEW SWITCHES TO EACH LIGHT FIXTURE DRIVER AS REQUIRED TO PROVIDE DIMMING FUNCTION. DIMMER SWITCH SHALL BE LUTRON NO. DVSTV OR EQUAL.
- 5. PROVIDE NEW SINGLE POLE 0-10V DIMMER TO REPLACE EXISTING SINGLE POLE SWITCHING. PROVIDE 0-10V DIMMING WIRING FROM NEW SWITCHES TO EACH LIGHT FIXTURE DRIVER AS REQUIRED TO PROVIDE DIMMING FUNCTION. DIMMER SWITCH SHALL BE LUTRON NO. DVSTV OR EQUAL.
- EXISTING COMBO EXIT EMERGENCY LIGHT TO REMAIN.
- 7. PROVIDE NEW CEILING MOUNTED COMBO EXIT EMERGENCY LIGHT. SEE SCHEDULE.
- 8. PROVIDE NEW WALL MOUNT OCCUPANCY SENSOR.
- 9. EXISTING LIGHTING IN THIS AREA TO REMAIN.

ClarkDietZ

5001 ENVOY - FLOYD COUNTY ANNEX RENNOVATION

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25


07/03/25 ADDENDUM #1

DATE REVISION

COND & THIRD FLOOR IGHTING NEW PLAN

PROJECT No. E07825001

E-2.01

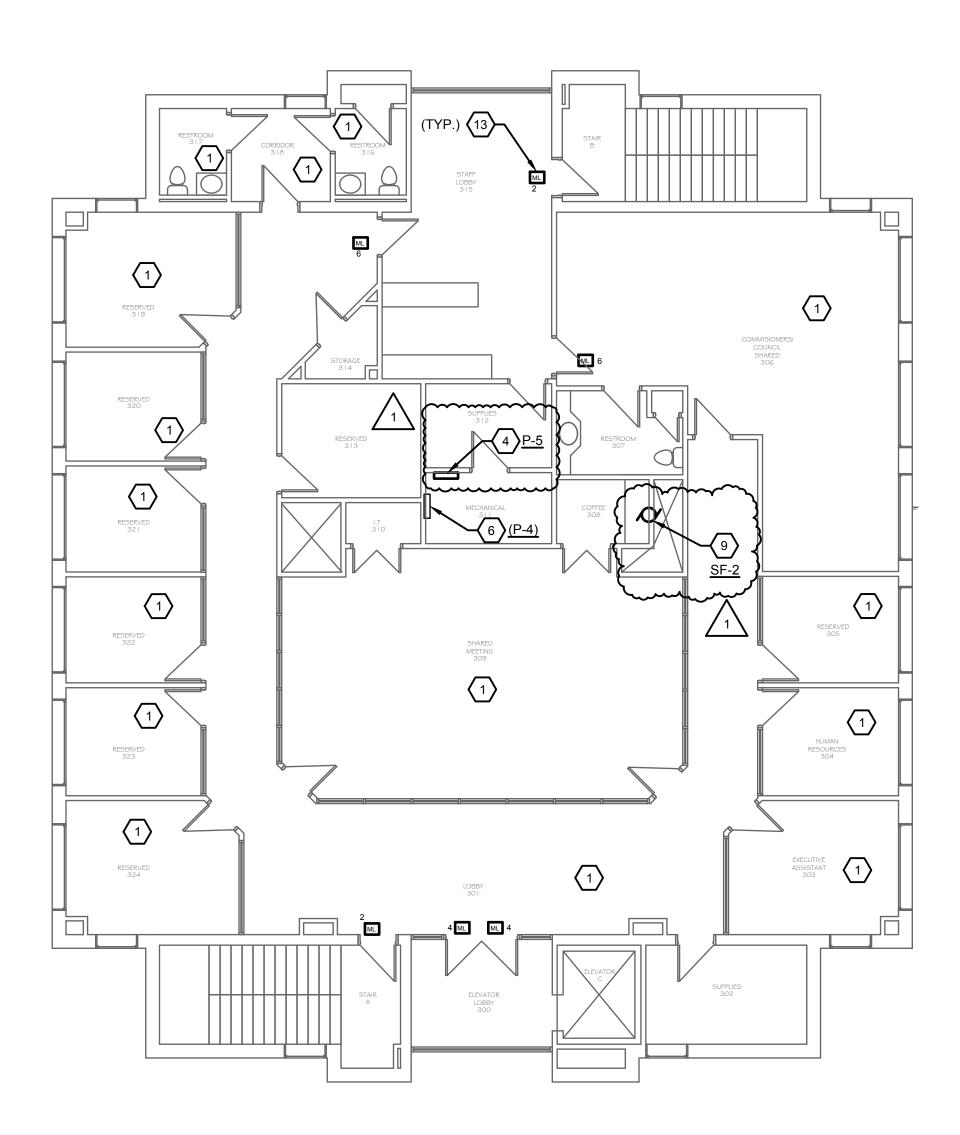



- 1. SEE SHEET E-0.01 FOR SYMBOLS AND ABBREVIATIONS.
- 2. ALL EXISTING ELECTRICAL DEVICES AND LIGHTS TO REMAIN UNLESS OTHERWISE NOTED. NOT ALL EXISTING ELECTRICAL DEVICES AND LIGHTS SHOWN.
- 3. ALL EXISTING CEILING MOUNTED DEVICES IN CEILINGS BEING REMOVED FOR CONSTRUCTION ARE TO BE REMOVED AND/OR PROTECTED DURING CONSTRUCTION, AND REINSTALLED AFTER CONSTRUCTION IS COMPLETED, UNLESS OTHERWISE NOTED.
- 4. ALL NEW CIRCUITS SHALL BE CONNECTED TO NEW PANEL P-5 ON THE THIRD FLOOR UNLESS SPECIFICALLY NOTED OTHERWISE.

# **#** KEYNOTES (THIS SHEET)

- 1. EXISTING RECEPTACLES IN THIS AREA TO REMAIN.
- 2. EXISTING DUPLEX RECEPTACLE TO REMAIN.REVISE/EXTEND EXISTING CIRCUIT IF REQUIRED DUE TO DEMOLITION OF ADJACENT RECEPTACLES.
- 3. EXISTING QUADPLEX RECEPTACLE TO REMAIN.
- 4. PROVIDE NEW PANEL P-5. SEE ONE-LINE DIAGRAM AND CIRCUIT DIRECTORY.
- 5. PROVIDE NEW QUADPLEX RECEPTACLE.
- 6. EXISTING POWER PANEL TO REMAIN.
- 7. EXISTING DATA CLOSET.
- 8. PROVIDE NEW DUPLEX RECEPTACLE.
- 9. SUPPLY FAN SF-1. MAKE FINAL CONNECTIONS. PROVIDE 2#12, 1#12G IN 3/4" CONDUIT TO PANEL P-5.
- 10. PROVIDE DUPLEX RECEPTACLE FOR COMPUTER AT CASEWORK. ROUTE FLEXIBLE CONDUIT INSIDE ADJACENT EXISTING WALL INTO CASEWORK. PROVIDE SURFACE RACEWAY ALONG THE INSIDE OF THE CASEWORK TO EACH RECEPTACLE. FIELD VERIFY RECEPTACLE LOCATIONS WITH OWNER.
- 11. PROVIDE DUPLEX RECEPTACLE FOR PRINTER INSIDE CASEWORK. UTILIZE SURFACE RACEWAY DESCRIBED IN KEYNOTE 10.
- 12. PROVIDE DUPLEX RECEPTACLE FOR NEW COPY MACHINE. PROVIDE SURFACE RACEWAY TO ABOVE ACCESSIBLE CEILING.
- 13. PROVIDE POWER CONNECTION TO MAGNETIC LOCK. COORDINATE INSTALLATION WITH FIRE ALARM RELAY INSTALLATION.
- 14. EXTEND EXISTING RECEPTACLE CIRCUIT TO NEW RECEPTACLES.

825001 ENVOY - FLOYD COUNTY ANNEX RENNOVATION

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25

07/03/25 ADDENDUM #1

DATE REVISION


ND & THIRD FLOOR WER NEW PLAN


PROJECT No. E07825001

DRAWING No.

E-2.11



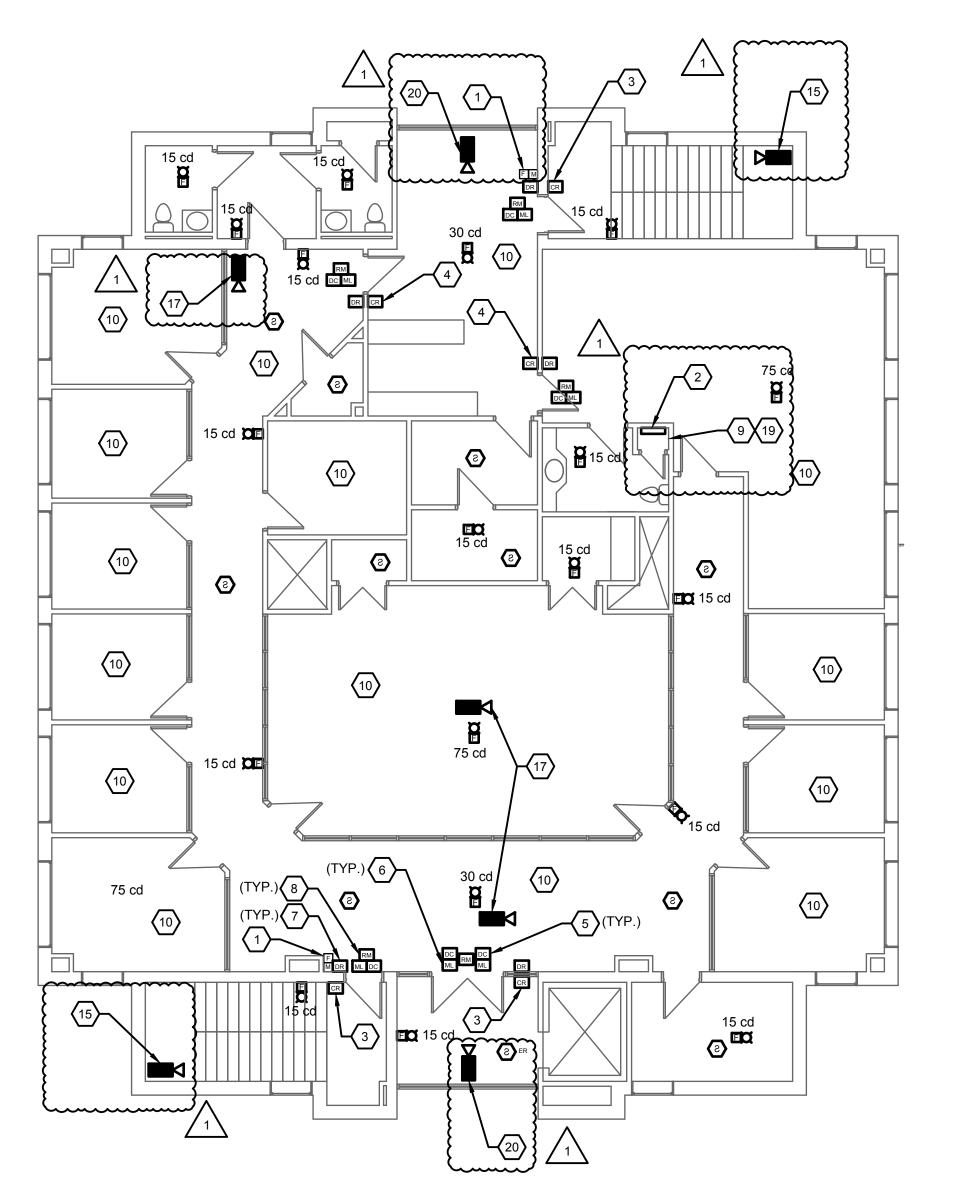



- 1. SEE SHEET E-0.01 FOR SYMBOLS AND ABBREVIATIONS.
- 2. ALL EXISTING ELECTRICAL DEVICES AND LIGHTS TO REMAIN UNLESS OTHERWISE NOTED. NOT ALL EXISTING ELECTRICAL DEVICES AND LIGHTS SHOWN.
- 3. ALL EXISTING CEILING MOUNTED DEVICES IN CEILINGS BEING REMOVED FOR CONSTRUCTION ARE TO BE REMOVED AND/OR PROTECTED DURING CONSTRUCTION, AND REINSTALLED AFTER CONSTRUCTION IS COMPLETED, UNLESS OTHERWISE
- 4. CONTRACTOR SHALL PROVIDE NEW FIRE ALARM SYSTEM DEVICES AS SHOWN. THE INTENTION IS TO EXTEND THE EXISTING FIRE ALARM SYSTEM TO THE NEW DEVICES. SEE SPECIFICATION 28 31 00 FOR ADDITIONAL INFORMATION.
- 5. CONTRACTOR SHALL PROVIDE NEW CARD ACCESS SYSTEM INCLUDING DEVICES AS SHOWN. SEE SPECIFICATION 28 11 00 FOR ADDITIONAL INFORMATION.
- CONTRACTOR SHALL PROVIDE NEW COMMUNICATIONS DEVICES, PLATES AND CABLING. SEE KEYNOTES AND THE DIVISION 27 SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- VIDEO SURVEILLANCE CAMERAS SHALL BE PROVIDED BY OTHERS. CONTRACTOR SHALL PROVIDE ROUGH IN AND CABLING. SEE KEYNOTES ON THIS SHEET FOR ADDITIONAL INFORMATION.

# **# KEYNOTES (THIS SHEET)**

- 1. EXISTING MANUAL PULL STATION TO REMAIN.
- 2. PROVIDE NEW CARD ACCESS CONTROL PANEL. PROVIDE CAT6 CABLE TO NEW PATCH PANEL AT EXISTING DATA CLOSET.
- 3. PROVIDE SURFACE MOUNTED CARD READER. PROVIDE SURFACE MOUNTED BOX. PROVIDE SURFACE MOUNTED CONDUIT TO THE INTERIOR OF THE SECURE SPACE. NO JUNCTION BOXES SHALL BE LOCATED IN THE STAIRWELL.
- PROVIDE FLUSH MOUNTED CARD READER. PROVIDE RECESSED BOX AT EXISTING WALL. PROVIDE FLEXIBLE CONDUIT IN WALL TO A JUNCTION BOX AT THE INTERIOR OF THE SECURE SPACE.
- 5. PROVIDE SURFACE MOUNT DOOR CONTACT FOR DOOR POSITION MONITORING ON SECURE SIDE OF THE DOOR.
- 6. PROVIDE MAGNETIC LOCK ON SECURE SIDE OF DOOR.
- 7. PROVIDE DOOR RELEASE PUSH BUTTON.
- 8. PROVIDE FIRE ALARM RELAY MODULE TO INTERFACE MAGNETIC LOCK WITH THE FIRE ALARM SYSTEM.
- 9. EXISTING DATA CLOSET. PROVIDE NEW PATCH PANELS FOR TERMINATION OF NEW DATA CABLING.
- 10. PROVIDE (2) COMMUNICATIONS EQUIPMENT OUTLETS AND CABLING PER EXISTING DATA LOCATION IN THIS SPACE TO NEW PATCH PANEL AT THE EXISTING DATA
- 11. PROVIDE (2) COMMUNICATIONS EQUIPMENT OUTLETS AND CABLING TO NEW PATCH PANEL AT THE EXISTING DATA CLOSET.
- 12. PROVIDE (2) COMMUNICATIONS EQUIPMENT OUTLETS FOR A PRINTER LOCATED INSIDE THE CASEWORK TO NEW PATCH PANEL AT EXISTING DATA CLOSET. ROUTE CABLING DOWN THROUGH THE ADJACENT WALL AND INTO THE CASEWORK. NEATLY ROUTE CABLING THROUGH CASEWORK. PROVIDE SURFACE MOUNT "BISCUIT" BOX FOR DATA JACKS.
- 13. PROVIDE (2) COMMUNICATIONS EQUIPMENT OUTLETS FOR COMPUTER STATION AT THE CASEWORK TO NEW PATCH PANEL AT EXISTING DATA CLOSET. ROUTE CABLING DOWN THROUGH THE ADJACENT WALL AND INTO THE CASEWORK. NEATLY ROUTE CABLING THROUGH CASEWORK. PROVIDE SURFACE MOUNT "BISCUIT" BOX FOR DATA JACKS.
- 14. PROVIDE (2) COMMUNICATIONS EQUIPMENT OUTLETS FOR NEW COPY MACHINE TO NEW PATCH PANEL AT EXISTING DATA CLOSET. PROVIDE SURFACE MOUNTED RACEWAY TO ABOVE ACCESSIBLE CEILING.
- 15. CORNER MOUNTED CAMERA. PROVIDE SURFACE MOUNTED BOX WITH WIRE MOLD TO ACCESSIBLE CEILING INSIDE THE SECURE SPACE. PROVIDE (1) COMMUNICATIONS CABLE WITH AN RJ45 TERMINATION TO PATCH PANEL AT EXISTING DATA CLOSET. COORDINATE BOX REQUIREMENT WITH CAMERA SUPPLIER.
- 16. PROVIDE NEW FIRE ALARM DEVICES AT EXISTING BLOCK WALL. PROVIDE SURFACE RACEWAY ON WALL AND IN STAIRWELL AS REQUIRED TO GET ABOVE ACCESSIBLE CEILING INSIDE THE TENANT SPACE.
- 17. CEILING MOUNTED CAMERA. PROVIDE RECESSED BOX IN CEILING WITH CONDUIT TO ACCESSIBLE CEILING INSIDE THE SECURE SPACE. PROVIDE (1) COMMUNICATIONS CABLE WITH AN RJ45 TERMINATION TO PATCH PANEL AT EXISTING DATA CLOSET. COORDINATE BOX REQUIREMENT WITH CAMERA SUPPLIER.
- 18. PROVIDE 2" EMT RACEWAY FROM THE BASEMENT TO THE SECOND FLOOR FOR FIBER OPTIC/BACKBONE CABLING PROVIDED BY OTHERS. PROVIDE A 24"W X 24"L X 6"D HINGED COVER PULL BOX IN THE DATA CLOSET FOR FLOOR 1 AND FLOOR 2.
- 19. PROVIDE 2" EMT RACEWAY FROM THE SECOND FLOOR COMMUNICATIONS PULL BOX TO THE THIRD FLOOR FOR FIBER OPTIC/BACKBONE CABLING PROVIDED BY OTHERS. PROVIDE A 24"W X 24"L X 6"D HINGED COVER PULL BOX IN THE DATA CLOSET AT FLOOR 3
- 20. CEILING MOUNTED CAMERA. PROVIDE RECESSED BOX IN TRAY CEILING AND RUN WIRE BACK TO ABOVE ACCESSIBLE CEILING. PROVIDE (1) COMMUNICATIONS CABLE WITH AN RJ45 TERMINATION TO PATCH PANEL AT EXISTING DATA CLOSET. COORDINATE BOX REQUIREMENT WITH CAMERA SUPPLIER.
- 21. EXISTING FIRE ALARM CONTROL PANEL.


PROJECT No. E07825001

DRAWING No.

LUI	MINAIRE	SCHEDULE									
		LUMINAIRE	L.A	MP		BALLASTS	S/DRI	VER	MOUNT	DESCRIPTION	NOTES
TYPE	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	NO.	WATTS	TYPE	NO.	VOLTAGE			
EM	LITHONIA	ECRG H0 SQ M6	LED	2	4	NA	NA	120	CEILING	COMBO EXIT AND EMERGENCY	1
SCHEE	ULE NOTES:										ļ

SCHEDULE NOTES:											
1	1. SCHEDULE CONTAINS THE	PREAPPROVED FIXTURES	FOR THIS PROJECT	. ANY SUBSTITUTIONS	MUST BE APPROVED PRI	OR TO THE BID DATE BY	THE ENGINEER.				

PANEL:	P-5	OC DEVICE TYPE:	CB	ENCLOSURE: SUR		SURFAC	SURFACE		BUS RATING (A):		100	
LOCATION:	3RD FLOOR	DEVICE FAMILY:	<b>BOLT-ON</b>	MOUNTING:					WITHSTAND (A):	10,000		
FED FROM:	P-4	MAIN BREAKER:	M.L.O.			L-L	L-N					
		WIRING:	4W+G	VOL	TAGE:	208	120					
CCT P AMP	S LOAD DESCRIPTION	NOTES	LOAD (VA)	A <sub>φ</sub> (VA)	B <sub>φ</sub> (VA)	C <sub>\phi</sub> (VA)	LOAD (VA)	DESCRIPTION	NOTES	<b>AMPS</b>	Р	CCT
1 1 20	2ND FLOOR RECEPTACLES	-	360	1560			1200	3RD FLOOR MAG LOCKS	-	20	1	2
3 1 20	2ND FLOOR RECEPTACLES	-	360		1560		1200	3RD FLOOR MAG LOCKS	-	20	1	4
5 1 20	2ND FLOOR RECEPTACLES	.=	360			1560	1200	3RD FLOOR MAG LOCKS	-	20	1	6
7 1 20	2ND FLOOR RECEPTACLES	-	360	360			0	SPARE	-	20	1	8
9 1 20	2ND FLOOR RECEPTACLES	-	360		360		0	SPARE	-	20	1	10
11 1 20	2ND FLOOR COUNTER RECEPTS	-	720			720	0	SPARE	-	20	1	12
13 1 20	2ND FLOOR PRINTER	-	960	960			0	SPARE	-	20	1	14
15 1 20	2ND FLOOR PRINTER	-	960		960		0	SPARE	-	20	1	16
17 1 20	2ND FLOOR COPIER	1=	1200			1200	0	SPARE	-	20	1	18
19 1 20	2ND FLOOR MAG LOCKS		1200	1200			0	SPARE	-	20	1	20
21 1 20	2ND FLOOR MAG LOCKS	-	1200		1200		0	SPARE	-	20	1	22
23 1 20	2ND FLOOR MAG LOCKS	-	1200			1200	0	SPARE	-	20	1	24
25 1 20	2ND FLOOR SF-1	-	264	264			0	SPARE	-	20	1	26
27 1 20	3RD FLOOR SF-2	-	264		264		0	SPARE	-	20	1	28
29 1 20	SPARE	: <del>=</del>	0			0	0	SPARE	Ε.	20	1	30
31 1 20	SPARE	-	0	0			0	SPARE	-	20	1	32
33 1 20	SPARE	1=	0		0		0	SPARE	-	20	1	34
35 1 20	SPARE	-	0			0	0	SPARE	H	20	1	36
37 1 20	SPARE	-	0	0			0	SPARE	=	20	1	38
39 1 20	SPARE	-	0		0		0	SPARE	-	20	1	40
41 1 20	SPARE	-	0			0	0	SPARE	-	20	1	42
		TOTAL VA F	PER PHASE:	4,344	4,344	4,680			TOTAL VA THIS PANEL:			13,368
		TOTAL AMPS F	PER PHASE:	36	36	39						

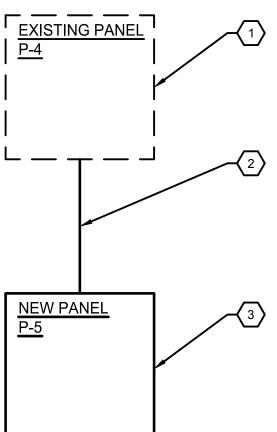



# # KEYNOTES (THIS SHEET)

- PROVIDE NEW 100A/3P BREAKER AT EXISTING PANEL P-4. PANEL P-4 UTILIZES SQUARE D TYPE QO BREAKERS.
   PROVIDE PANEL P-5. SEE CIRCUIT DIRECTORY.
   PROVIDE (4) #2 AWG PHASE CONDUCTORS AND (1) #8 AWG EQUIPMENT GROUNDING CONDUCTOR IN 1-1/2" CONDUIT.


DATE REVISION

PROJECT No. E07825001

DRAWING No.

E-4.01

NOTE: DIMENSIONAL DATA IS NOT TO BE OBTAINED BY SCALING ANY PORTION OF THIS DRAWING.

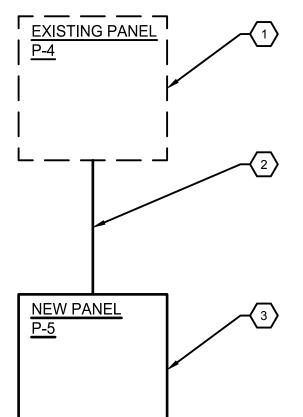

A. THE DESIGN OF THE FIRE SUPPRESSION SYSTEM SHALL BE IN ACCORDANCE WITH THE FOLLOWING CODES:


- a. IBC 2021 EDITION
- b. NFPA 13 2022 EDITION
- B. EXCEPT WHERE NOTED ON THE DRAWINGS, ALL AREAS SHALL BE COMPLETELY PROTECTED BY AN APPROVED AUTOMATIC WET FIRE SUPPRESSION SYSTEM.
  - a. THE SYSTEM SHALL BE DESIGNED TO ACCOMMODATE THE HAZARD
  - LEVEL AS SHOWN ON THE DRAWINGS. NO MODIFICATION IS BEING MADE TO THE EXISTING FIRE DEPARTMENT
- CONNECTION. C. THE CONTRACTOR SHALL PROVIDE ALL DRAWINGS, CALCULATIONS, AND ADDITIONAL DOCUMENTATION TO ENGINEER.
- CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING SPRINKELR HEADS AND PIPING, AND THAT ALL EXISTING PIPING IS ADEQUATELY SIZED FOR REVISED LAYOUT. CONTRACTOR SHALL INCLUDE COST ASSOCIATED WITH UP SIZING THE MAIN IN AREAS WHERE PIPING IS NOT ADEQUATELY SIZED.
- ALL NEW SPRINKLER PIPING SHALL BE ROUTED TO CONSERVE BUILDING SPACE. ALL PIPING TO BE EXPOSED SHALL BE CLEARLY DISPLAYED AND LABELED ON CONTRACTOR SUPPLIED DRAWINGS. WHERE EXPOSED, ALL PIPING SHALL BE ROUTED IN BETWEEN OR ADJACENT TO THE STRUCTURE.
- CONTRACTOR SHALL COORDINATE LOCATION AND ELEVATION OF NEW FIRE PROTECTION PIPING AND SYSTEM WITH EXISTING AND NEW RECESSED AND

- SURFACE MOUNTED LIGHTS, SMOKE DETECTORS, ALL EXISTING AND NEW CONDUITS, PIPING, DUCTWORK AND OTHER UTILITIES PRIOR TO INSTALLATION. WHERE CONDUITS, PIPING OR DUCTWORK REQUIRE RELOCATION TO INSTALL SPRINKLER PIPING, THE CONTRACTOR SHALL INCLUDE ALL COSTS ASSOCIATED WITH RELOCATING THE CONDUIT, PIPING OR DUCTWORK IN THEIR BID.
- 5. ALL CUTTING AND PATCHING AS REQUIRED TO INSTALL THE FIRE SUPPRESSION SYSTEM SHALL BE BY THE CONTRACTOR.
- 6. ALL EXPOSED FIRE PROTECTION PIPING SHALL BE PAINTED IN ACCORDANCE WITH THE SPECIFICATIONS. COLOR TO BE SELECTED BY THE ARCHITECT.
- 7. NO SPRINKLER PIPING AND/OR SPRINKLER HEADS SHALL BE LOCATED DIRECTLY ABOVE ELECTRICAL EQUIPMENT.
- PIPING IS SHOWN IN SCHEMATIC FORM ONLY, CHANGES IN ELEVATION ARE NOT NECESSARILY SHOWN. ROUTE PIPING IN AN ORDERLY MANNER AS REQUIRED FOR CLEARANCE WITH STRUCTURAL CONDITIONS. COORDINATE LOCATION OF PIPING WITH OTHER TRADES PRIOR TO INSTALLATION. WHERE POSSIBLE, RACK PIPING HORIZONTALLY OR VERTICALLY.
- ALL CONNECTIONS TO, OR SHUTDOWNS OF, EXISTING SYSTEMS SHALL BE COORDINATED WITH THE OWNER TO PROVIDE MINIMUM INTERFERENCE WITH THEIR OPERATION AND DOWNTIME OF THE SYSTEM.
- 10. CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ADEQUATE SUPPORTING SYSTEMS AND DEVICES FOR ALL PIPING, EQUIPMENT, AND ACCESSORIES PER NFPA REQUIREMENTS.
- 11. CONTRACTOR IS REQUIRED TO INSTALL DRAIN VALVES IF PIPING ELEVATIONS ARE CHANGED DUE TO EXISTING UTILITIES. COORDINATE LOCATION OF DRAIN

VALVE WITH OWNER AND USER. LABEL ALL DRAIN VALVES. SHOW ALL DRAIN VALVES ON AS-BUILT DRAWINGS. LOCATE ALL VALVES IN ACCESSIBLE LOCATION.

- 12. PROVIDE AND INSTALL SLEEVES FOR ALL PIPING PASSING THROUGH WALLS.
- 13. PROVIDE FIRE STOPPING OR FIRE CAULK AT ALL PENETRATIONS OF FIRE AND/OR SMOKE RATED WALLS, CEILINGS, AND FLOORS. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS OF FIRE AND/OR SMOKE RATED WALLS, CEILINGS, AND FLOORS.

## FIRE PROTECTION LEGEND

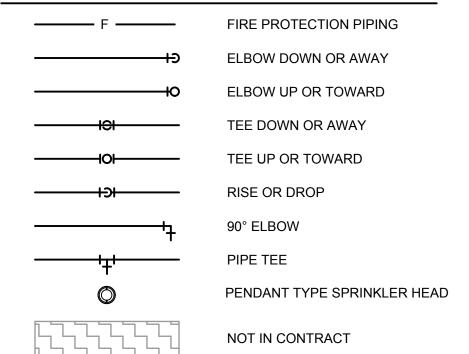

# SPRINKLER HAZARD LEGEND LIGHT HAZARD .10/1500 ORDINARY HAZARD GROUP I .15/1500 ORDINARY HAZARD GROUP II .20/1500 EXTRA HAZARD GROUP I .30/2500 EXTRA HAZARD GROUP II .40/2500

OYD

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25

07/03/25 ADDENDUM #1


DATE REVISION

E PROTECTION GENERAL NOTES LEGEND AND ABBREVIATIONS

PROJECT No. E07825001

DRAWING No. FP-0.01

NOTE: DIMENSIONAL DATA IS NOT TO BE OBTAINED BY SCALING ANY PORTION OF THIS DRAWING

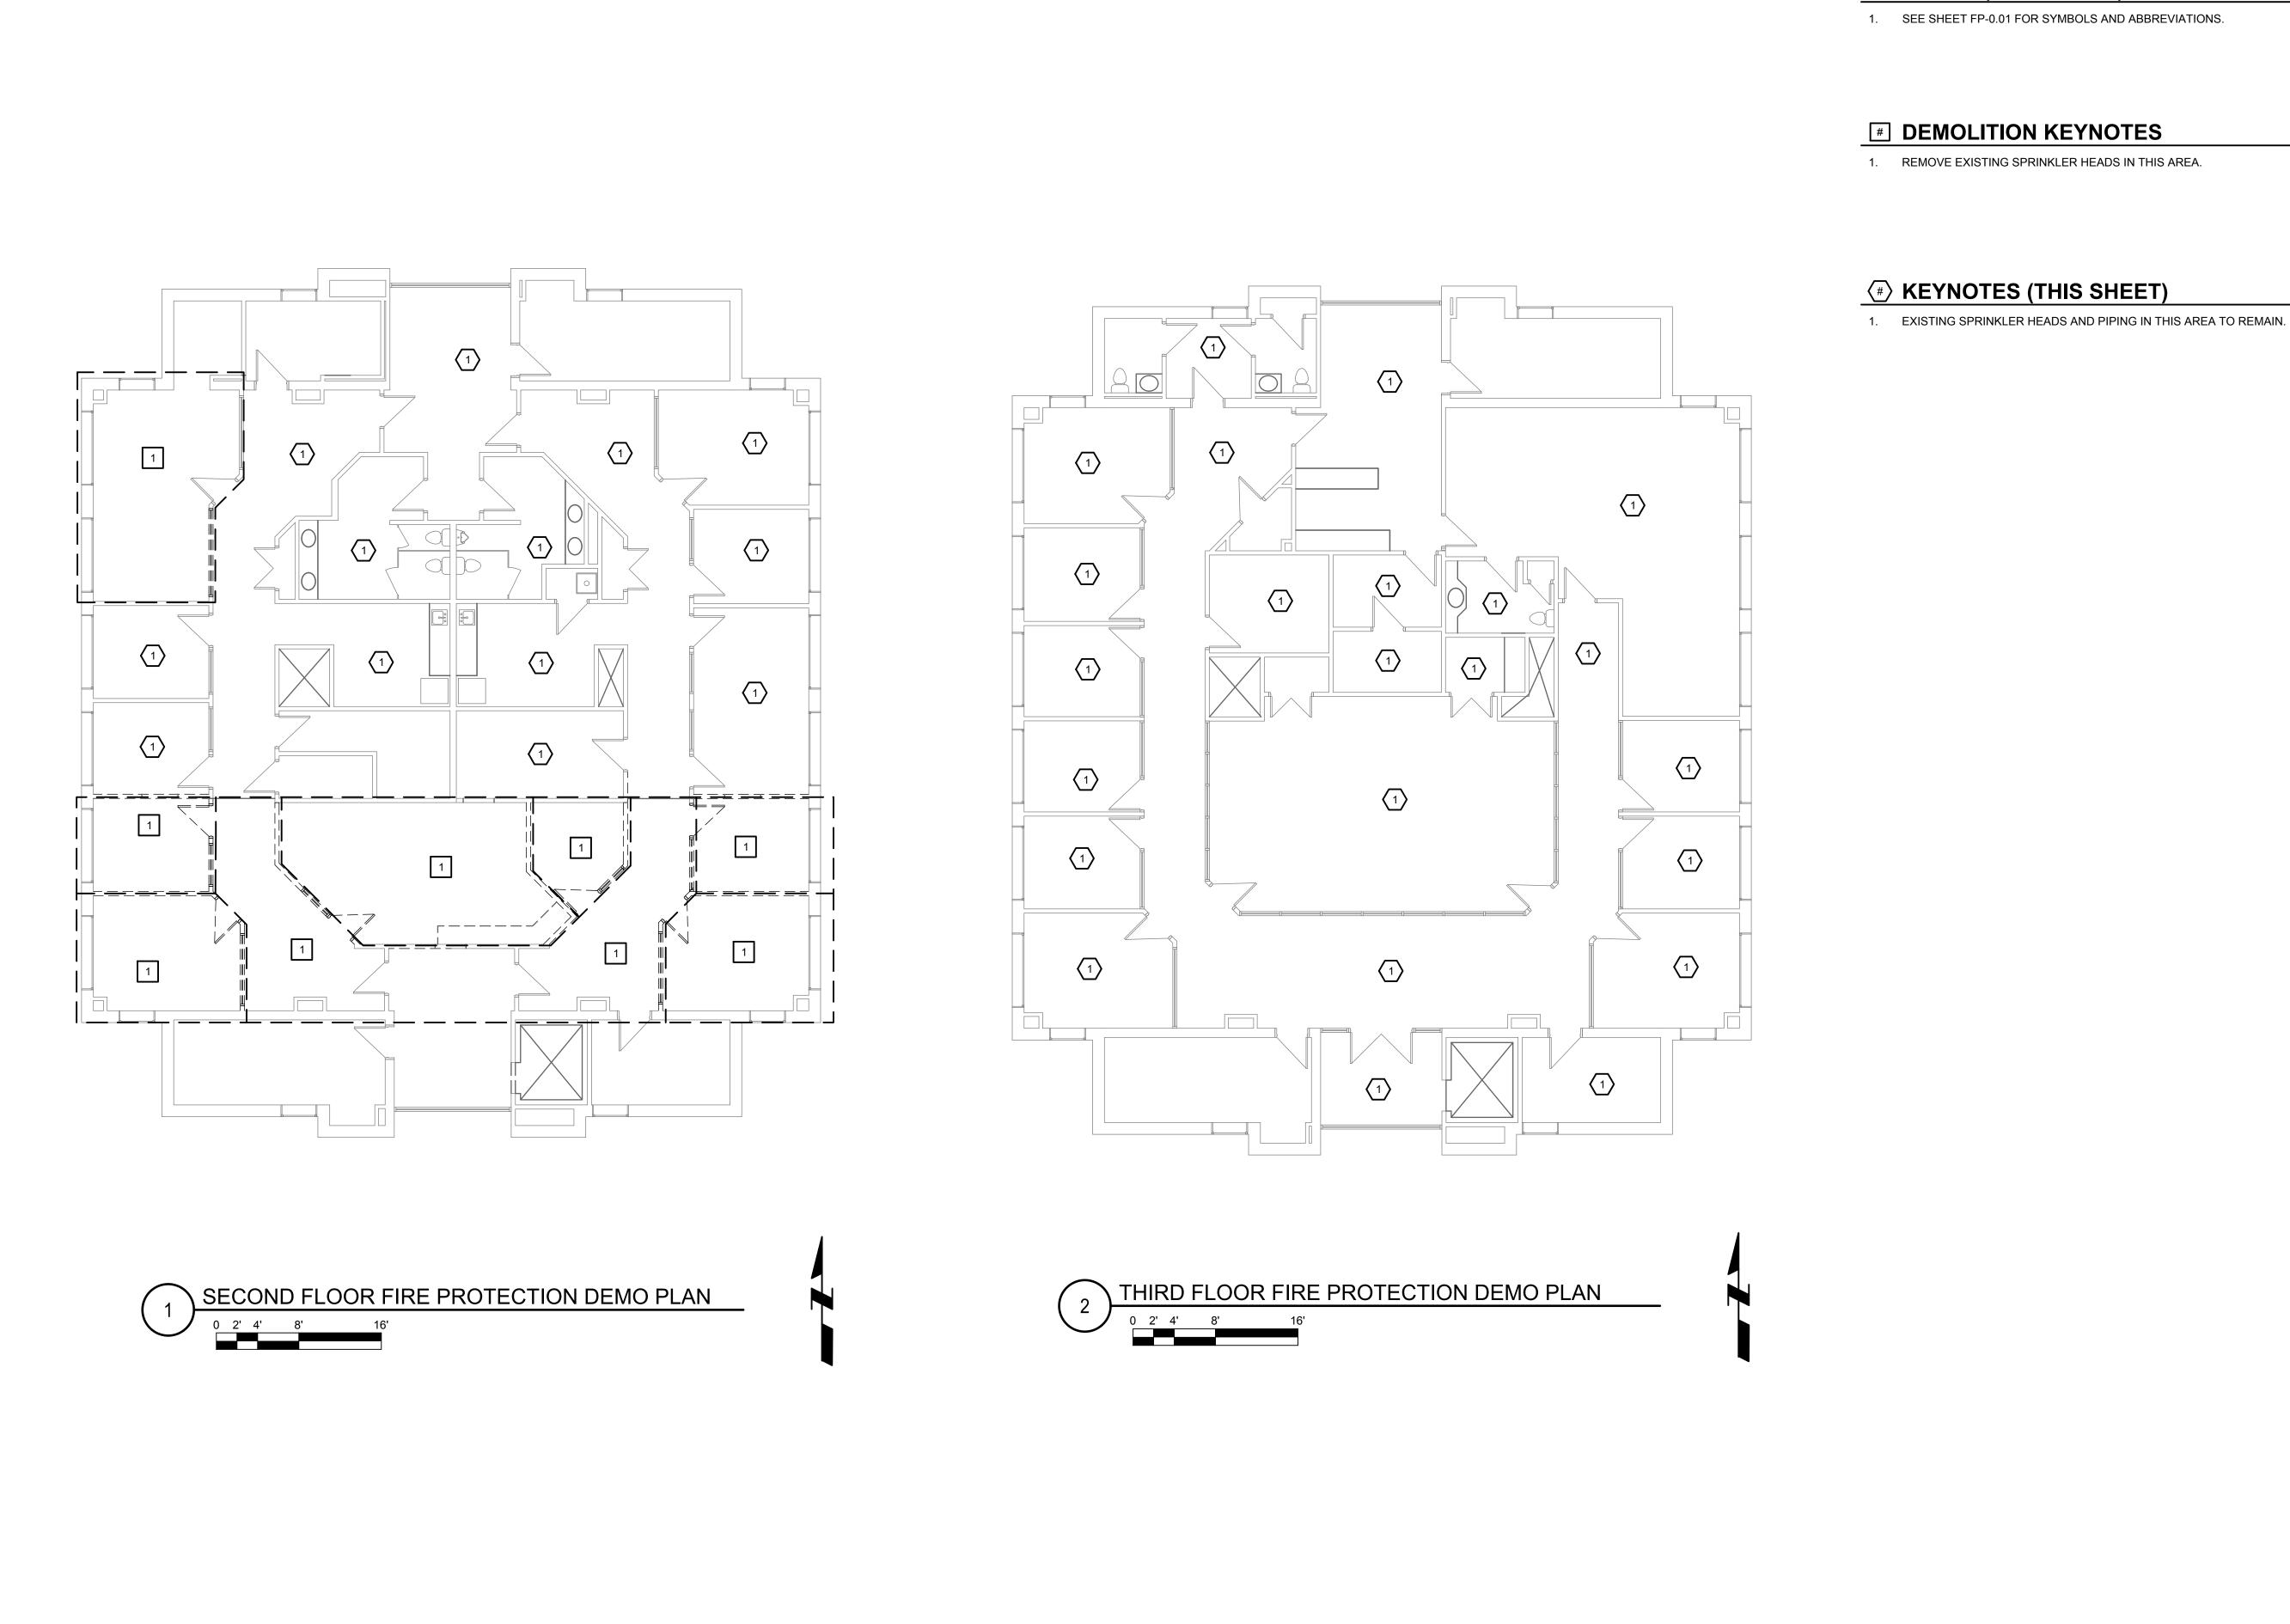

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25

07/03/25 ADDENDUM #1

DATE REVISION

E07825001

FP-1.01

1. SEE SHEET FP-0.01 FOR SYMBOLS AND ABBREVIATIONS.

# **#** KEYNOTES (THIS SHEET)

- 1. PROVIDE NEW SPRINKLER HEADS IN THIS AREA. REVISE SPRINKLER PIPING AS NEEDED TO ACCOMMODATE NEW SPRINKLER HEAD LOCATIONS IN NEW CEILING GRID. PROVIDE COVERAGE AS REQUIRED BY NFPA 13.
- 2. EXISTING SPRINKLER HEADS AND PIPING IN THIS AREA TO REMAIN.



5001 ENVOY - FLOY COUNTY ANNEX RENNOVATION

DESIGNED BY: ARW
DRAWN BY: ARW
CHECKED BY: NTP
DATE CHECKED: 05/16/25

07/03/25 ADDENDUM #1


DATE REVISION


COND & THIRD FLOOR FIRE PROTECTION NEW PLAN

PROJECT No. E07825001

FP-2.01

DWG OF DWGS
NOTE: DIMENSIONAL DATA IS NOT TO BE OBTAINED BY SCALING ANY PORTION OF THIS DRAWING.

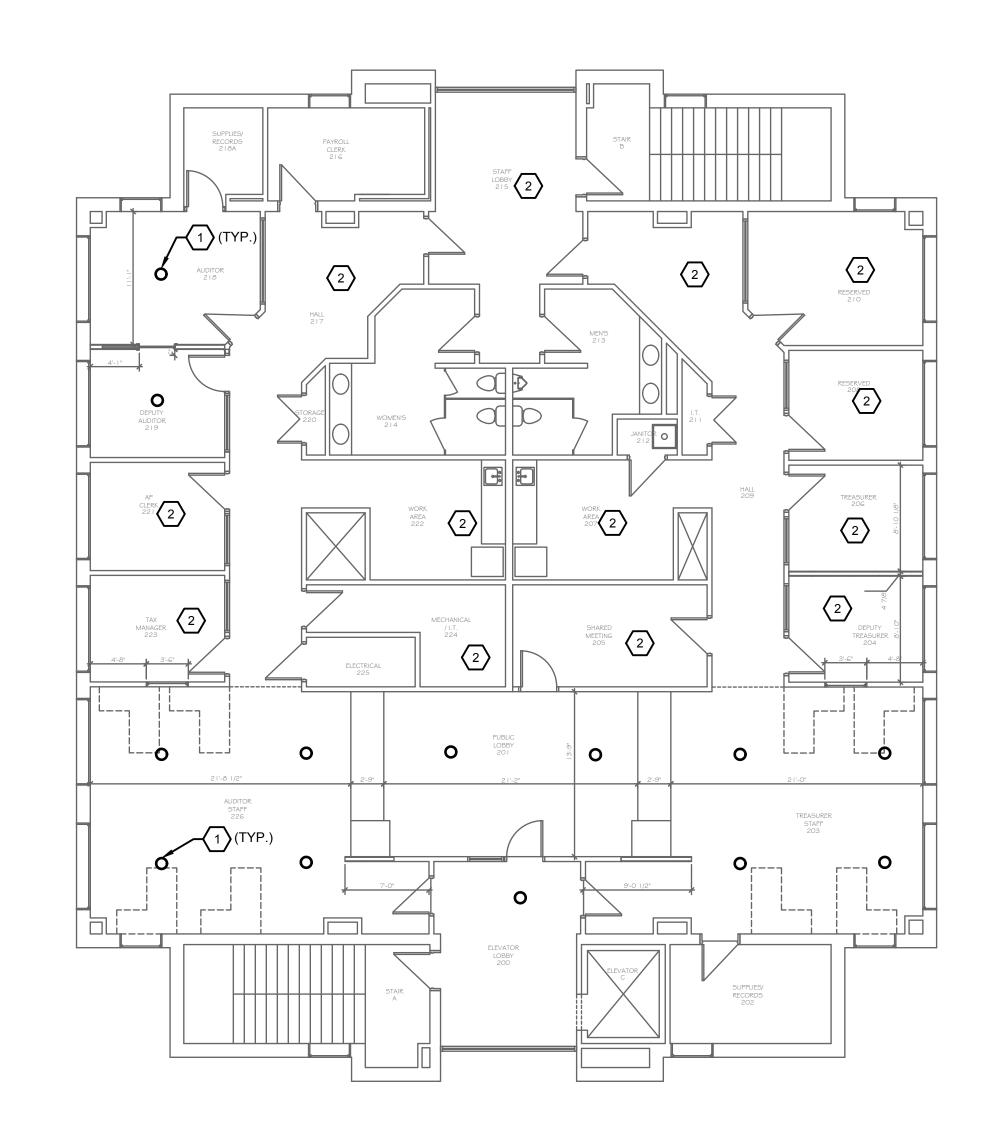

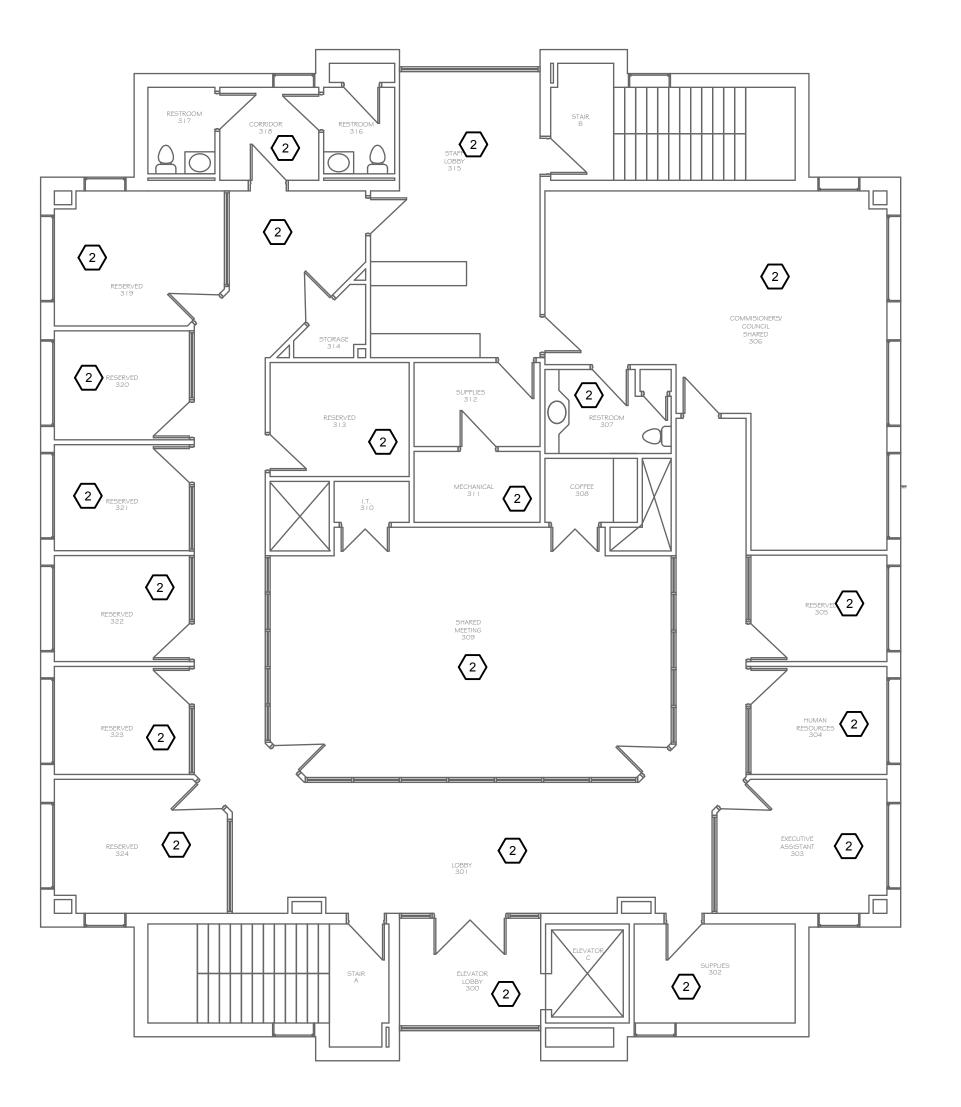



SECOND FLOOR FIRE PROTECTION NEW PLAN

0 2' 4' 8' 16'

PROJECT TITLE